



Palco Recessed / Surface

Design Artec
Studio

iGuzzini

Last information update: February 2025

Product configuration: QC43
QC43: Palco single surface Ø37 - flood - remote driver



Product code
QC43: Palco single surface Ø37 - flood - remote driver

Technical description
Miniaturised adjustable spotlight for surface installation. Spotlight body with a die-cast aluminium dissipation system - cast zamak rotation unit - shaped steel fixing plate - thermoplastic surface cover base with stainless steel locking mechanism. The swivel joints allow the spotlight to be rotated by 360° and tilted by 90°. The set back position of the optic unit guarantees a high level of visual comfort with a thermoplastic high definition lens. Ballast not included, available with separate code.

Installation
Installation surface plate fastening - spotlight unit attached to cover base with a locking mechanism.

Colour	Weight (Kg)
White (01) Black (04)	0.11

Mounting
wall surface|ceiling surface


Wiring
Output cables for connecting to power supply line.

Notes
Technical and anti-glare accessories available.

Complies with EN60598-1 and pertinent regulations




Technical data			
Im system:	450	CRI (minimum):	90
W system:	8.1	Colour temperature [K]:	2700
Im source:	750	MacAdam Step:	2
W source:	8.1	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	55.6	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	60	Number of optical assemblies:	1
Beam angle [°]:	45°	LED current [mA]:	650

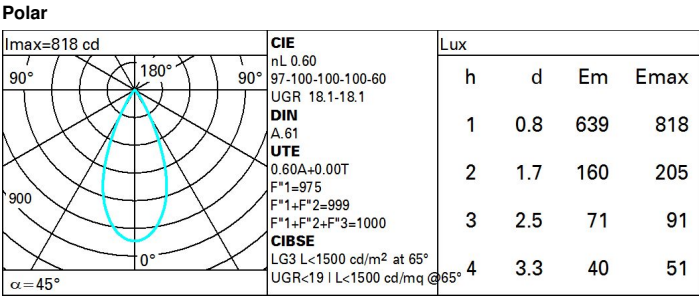

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	54	51	49	47	50	48	48	46	77
1.0	56	53	51	50	53	51	51	49	81
1.5	59	57	55	54	56	55	54	53	88
2.0	61	59	58	57	59	58	57	55	92
2.5	62	61	60	59	60	59	59	57	95
3.0	63	62	61	61	61	61	60	58	97
4.0	64	63	63	62	62	62	61	59	99
5.0	64	64	63	63	63	62	61	60	100

Luminance curve limit

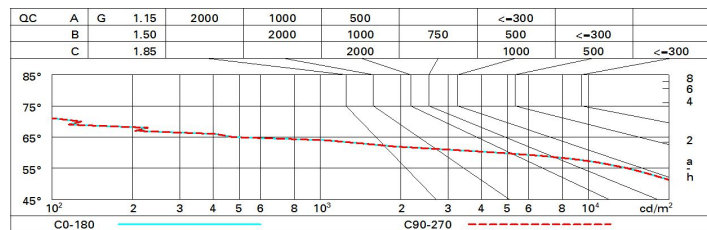

UGR diagram

Corrected UGR values (at 750 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	18.6	19.3	18.9	19.5	19.7	18.6	19.3	18.9	19.5	19.7
	3H	18.5	19.1	18.8	19.3	19.6	18.5	19.1	18.8	19.4	19.6
	4H	18.4	19.0	18.8	19.2	19.5	18.4	19.0	18.8	19.3	19.6
	6H	18.3	18.8	18.7	19.1	19.5	18.4	18.8	18.7	19.2	19.5
	8H	18.3	18.8	18.7	19.1	19.4	18.3	18.8	18.7	19.1	19.5
	12H	18.3	18.7	18.6	19.1	19.4	18.3	18.7	18.7	19.1	19.4
4H	2H	18.4	19.0	18.8	19.3	19.6	18.4	19.0	18.8	19.2	19.5
	3H	18.3	18.7	18.7	19.1	19.4	18.3	18.7	18.7	19.1	19.4
	4H	18.2	18.6	18.6	19.0	19.3	18.2	18.6	18.6	19.0	19.3
	6H	18.1	18.5	18.5	18.9	19.3	18.1	18.5	18.5	18.9	19.3
	8H	18.1	18.4	18.5	18.8	19.2	18.1	18.4	18.5	18.8	19.2
	12H	18.0	18.3	18.5	18.7	19.2	18.0	18.3	18.5	18.7	19.2
8H	4H	18.1	18.4	18.5	18.8	19.2	18.1	18.4	18.5	18.8	19.2
	6H	18.0	18.2	18.4	18.7	19.2	18.0	18.2	18.4	18.7	19.2
	8H	17.9	18.1	18.4	18.6	19.1	17.9	18.1	18.4	18.6	19.1
	12H	17.9	18.1	18.4	18.5	19.1	17.9	18.1	18.4	18.5	19.1
12H	4H	18.0	18.3	18.5	18.7	19.2	18.0	18.3	18.5	18.7	19.2
	6H	17.9	18.1	18.4	18.6	19.1	17.9	18.1	18.4	18.6	19.1
	8H	17.9	18.1	18.4	18.5	19.1	17.9	18.1	18.4	18.5	19.1
Variations with the observer position at spacing:											
S =	1.0H	5.2 / -8.8					5.2 / -8.8				
	1.5H	8.0 / -22.1					8.0 / -22.1				
	2.0H	10.0 / -34.7					10.0 / -34.7				