

Coefficients d'utilisation

R	77	75	73	71	55	53	33	00	DRR
K0.8	69	65	63	60	65	62	62	59	76
1.0	72	69	66	65	68	66	66	63	81
1.5	76	74	72	70	73	71	70	68	87
2.0	79	77	75	74	76	75	74	71	92
2.5	80	79	78	77	78	77	76	74	95
3.0	81	80	80	79	79	78	77	75	97
4.0	83	82	81	81	80	80	79	77	98
5.0	83	82	82	82	81	81	79	78	99

Courbe limite de luminance

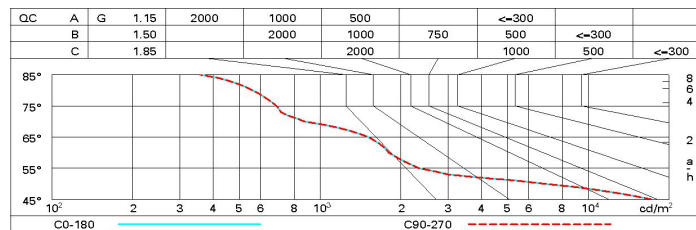


Diagramme UGR

Photometric curve code: 01800000.RV1											
Uncorrected UGR values (at 1000 lm bare lamp luminous flux)											
Reflect.:											
ceiling	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	
walls	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	
work pl.	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	
Room dim											
x											
y											
2H	2H	13.1	13.8	13.4	14.0	14.2	13.1	13.8	13.4	14.0	14.2
	3H	13.0	13.6	13.3	13.8	14.1	13.0	13.6	13.3	13.8	14.1
	4H	12.9	13.5	13.3	13.8	14.1	12.9	13.5	13.3	13.8	14.1
	6H	12.9	13.3	13.2	13.7	14.0	12.9	13.3	13.2	13.7	14.0
	8H	12.8	13.3	13.2	13.6	14.0	12.8	13.3	13.2	13.6	14.0
	12H	12.8	13.2	13.2	13.6	13.9	12.8	13.2	13.2	13.6	13.9
4H	2H	12.9	13.5	13.3	13.8	14.1	12.9	13.5	13.3	13.8	14.1
	3H	12.8	13.2	13.2	13.6	13.9	12.8	13.2	13.2	13.6	13.9
	4H	12.7	13.1	13.1	13.5	13.9	12.7	13.1	13.1	13.5	13.9
	6H	12.6	13.0	13.1	13.4	13.8	12.6	13.0	13.1	13.4	13.8
	8H	12.6	12.9	13.0	13.3	13.7	12.6	12.9	13.0	13.3	13.7
	12H	12.5	12.8	13.0	13.2	13.7	12.5	12.8	13.0	13.2	13.7
8H	4H	12.6	12.9	13.0	13.3	13.7	12.6	12.9	13.0	13.3	13.7
	6H	12.5	12.8	13.0	13.2	13.7	12.5	12.8	13.0	13.2	13.7
	8H	12.4	12.7	12.9	13.1	13.6	12.4	12.7	12.9	13.1	13.6
	12H	12.4	12.6	12.9	13.1	13.6	12.4	12.6	12.9	13.1	13.6
12H	4H	12.5	12.8	13.0	13.2	13.7	12.5	12.8	13.0	13.2	13.7
	6H	12.4	12.7	12.9	13.1	13.6	12.4	12.7	12.9	13.1	13.6
	8H	12.4	12.6	12.9	13.1	13.6	12.4	12.6	12.9	13.1	13.6
Variations with the observer position at spacing:											
S =	1.0H		5.1	/	-13.5		5.1	/	-13.5		
	1.5H		7.9	/	-14.7		7.9	/	-14.7		
	2.0H		9.9	/	-15.9		9.9	/	-15.9		