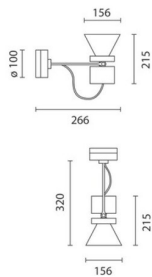


Last information update: June 2024

**Product configuration: 4900+1636**

4900: Projector with 50 W QR 111 dimmable electronic transformer

**Product code**4900: Projector with 50 W QR 111 dimmable electronic transformer **Attention! Code no longer in production****Technical description**

Die-cast aluminium and thermoplastic projector. It can be rotated by 340° with respect to the vertical axis and inclined by +/- 100° with respect to the horizontal axis. Mechanical screw-locking devices, graduated scales and adjustable friction devices guarantee the precise positioning of the light beam. The projector is equipped with a die-cast aluminium base for ceiling or wall application. The wiring foresees the use of a dimmable electronic transformer. Various accessories are available, such as adjustable flaps, wall-washer screen, IR filter, refractor for the elliptical distribution of the light flow and coloured filters.

**Installation**

Wall or ceiling.

**Colour**

White (01) | Grey (15)

**Mounting**

wall surface|ceiling surface

**Wiring**

Complete with electromagnetic transformer for 50W halogen lamps, fitted inside the luminaire.

**Notes**

The luminaire becomes IP40 with the use of accessory glasses. For the photometric data of the luminaire, refer to the photometric characteristics of the light source.

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	443	CRI (minimum):	100
W system:	55	Colour temperature [K]:	3000
Im source:	443	Lamp maximum intensity	2400
W source:	50	[cd]:	
Luminous efficiency (Im/W, 8.1 real value):		Voltage [Vin]:	12
Im in emergency mode:	-	Lamp code:	1636
Total light flux at or above an angle of 90° [Lm]:	0	Socket:	G53
Light Output Ratio (L.O.R.) [%]:	100	Number of lamps for optical assembly:	1
Beam angle [°]:	18°	ZVEI Code:	QR 111
		Number of optical assemblies:	1


**Polar**

Imax=4019 cd 90° 180° 90° 4000 0° α = 18°	CIE nL 1.00 94-98-100-100-100 UGR <10-<10 DIN A.61 UTE 1.00A+0.00T F*1=940 F*1+F*2=983 F*1+F*2+F*3=997 CIBSE LG3 L<1500 cd/m² at 65° UGR<10   L<1500 cd/mq @ 65°				Lux			
	h	d	Em	Emax				
	2	0.6	810	1005				
	4	1.3	202	251				
	6	1.9	90	112				
	8	2.5	51	63				

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	88	82	79	76	81	78	78	74	74
1.0	92	87	84	81	86	83	83	79	79
1.5	97	94	91	88	92	90	89	86	86
2.0	101	98	96	94	96	95	93	90	90
2.5	103	101	99	97	99	98	96	94	94
3.0	104	103	101	100	101	100	98	96	96
4.0	105	104	103	103	103	102	100	98	98
5.0	106	105	105	104	104	103	101	99	99

# Luminance curve limit

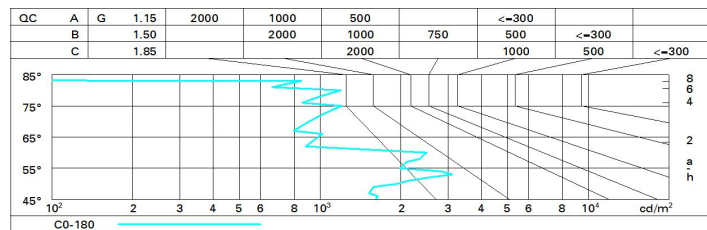

# UGR diagram

Corrected UGR values (at 443 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	7.6	9.6	7.9	9.9	10.2	7.6	9.6	7.9	9.9	10.2
	3H	8.1	9.3	8.4	9.7	10.0	7.9	9.2	8.3	9.5	9.8
	4H	8.5	9.4	8.8	9.8	10.1	8.0	8.9	8.3	9.2	9.6
	6H	8.9	9.5	9.2	9.8	10.2	8.0	8.7	8.4	9.0	9.3
	8H	8.9	9.6	9.3	10.0	10.3	8.0	8.7	8.3	9.0	9.4
	12H	8.8	9.7	9.2	10.0	10.4	7.9	8.7	8.3	9.1	9.4
4H	2H	8.0	8.9	8.3	9.2	9.6	8.5	9.4	8.8	9.8	10.1
	3H	8.6	9.4	9.0	9.7	10.1	8.9	9.7	9.3	10.1	10.5
	4H	9.0	10.0	9.4	10.4	10.8	9.0	10.0	9.4	10.4	10.8
	6H	9.2	10.9	9.7	11.3	11.8	8.8	10.5	9.3	11.0	11.5
	8H	9.2	11.0	9.7	11.5	12.0	8.8	10.6	9.3	11.1	11.6
	12H	9.1	11.0	9.6	11.5	12.0	8.7	10.6	9.3	11.1	11.6
8H	4H	8.8	10.6	9.3	11.1	11.6	9.2	11.0	9.7	11.5	12.0
	6H	9.4	11.0	9.9	11.5	12.0	9.5	11.1	10.0	11.5	12.1
	8H	9.6	10.9	10.2	11.4	11.9	9.6	10.9	10.2	11.4	11.9
	12H	9.8	10.6	10.3	11.1	11.7	9.8	10.7	10.4	11.2	11.7
12H	4H	8.7	10.6	9.3	11.1	11.6	9.1	11.0	9.6	11.5	12.0
	6H	9.5	10.8	10.0	11.3	11.8	9.5	10.8	10.1	11.3	11.8
	8H	9.8	10.7	10.4	11.2	11.7	9.8	10.6	10.3	11.1	11.7
Variations with the observer position at spacing:											
S =	1.0H	1.0 / -1.0					1.0 / -1.0				
	1.5H	1.3 / -1.5					1.3 / -1.5				
	2.0H	2.7 / -2.2					2.7 / -2.2				