


Last information update: December 2024

**Product configuration: Q389**  
Q389: Frame Angular Module - General Down Light - Neutral LED - DALI



**Product code**

Q389: Frame Angular Module - General Down Light - Neutral LED - DALI

**Technical description**

Angular element for Frame version profiles with contact frame; including a Neutral LED module. Micro-prismatic screen with a high efficiency diffuser screen (high efficiency general light); screen set up for connecting several lengths by overlapping. Built-in DALI dimmable control gear. Pass-through wiring for continuous lines:

**Installation**

Recessed using the brackets on the profile.

**Colour**  
White (01)

**Weight (Kg)**  
5.1

**Mounting**  
ceiling recessed

**Wiring**

The angular profile is supplied with pass-through wiring for continuous lines. Quick coupling terminal blocks to simplify connections between the luminaires. LED module complete with integrated dimmable DALI control gear.

**Notes**

Take care when configuring the system; to complete a continuous line with an angular profile correctly, two initial modules are required, one for each side of the corner.  
TPb rated. TPa version available on request, contact iGuzzini for more info


Complies with EN60598-1 and pertinent regulations



**Technical data**

lm system:	3996	Colour temperature [K]:	4000
W system:	33	MacAdam Step:	3
lm source:	2700	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	15	Voltage [Vin]:	230
Luminous efficiency (lm/W, real value):	121.1	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	74	Number of optical assemblies:	2
CRI (minimum):	80	Control:	DALI-2

**Polar**

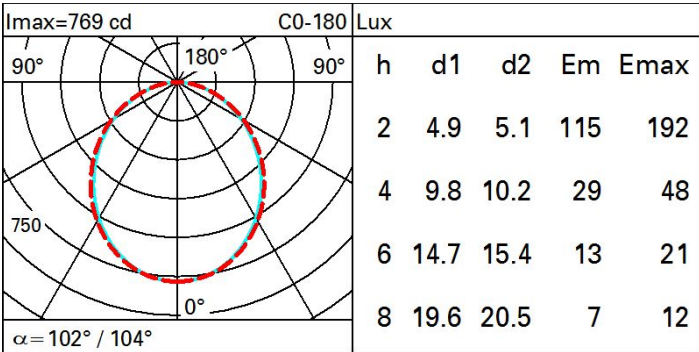

# Isolux

