


Last information update: April 2024

Product configuration: N014.Y

N014.Y: Fixed circular recessed luminaire - Ø153 mm - warm white - medium optic - UGR<19

**Product code**

N014.Y: Fixed circular recessed luminaire - Ø153 mm - warm white - medium optic - UGR<19

Technical description

Fixed round luminaire designed to use a LED lamp with C.O.B. technology. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Die-cast aluminium body and passive dissipation system. Product complete with LED lamp in warm white colour tone CRI 90 (3000K). General light emission, with controlled luminance UGR<19 1500 cd/m² α>65° medium optic.

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 25 mm.

Colour

White / Aluminium (39)

Weight (Kg)

1.22

Mounting

ceiling recessed

Wiring

product complete with DALI components

Complies with EN60598-1 and pertinent regulations



IP20

IP54

On the visible part of the product once installed

**Technical data**

lm system:	3340	CRI (minimum):	90
W system:	36.7	Colour temperature [K]:	3000
lm source:	3850	MacAdam Step:	2
W source:	33	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	91	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	87	Number of optical assemblies:	1
Beam angle [°]:	24°	Control:	DALI-2


Polar

Imax=12985 cd		CIE		Lux			
90°		nL 0.87		h	d	Em	Emax
180°		99-100-100-100-87		2	0.9	2473	3246
90°		UGR 16.3-16.3		4	1.7	618	812
12500		DIN A 61		6	2.6	275	361
0°		UTE 0.87A+0.00T		8	3.4	155	203
α=24°		F*1=993					
		F*1+F*2=1000					
		F*1+F*2+F*3=1000					
		CIBSE LG3 L<1500 cd/m ² at 65°					
		UGR<19 L<1500 cd/mq @ 65°					

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	78	74	71	69	73	71	70	68	78
1.0	82	78	75	73	77	75	74	72	83
1.5	86	83	81	79	82	80	79	77	88
2.0	88	86	85	83	85	84	83	80	93
2.5	90	89	87	86	87	86	85	83	96
3.0	91	90	89	88	89	88	87	85	98
4.0	92	91	91	90	90	89	88	86	99
5.0	93	92	92	91	91	90	89	87	100

Luminance curve limit

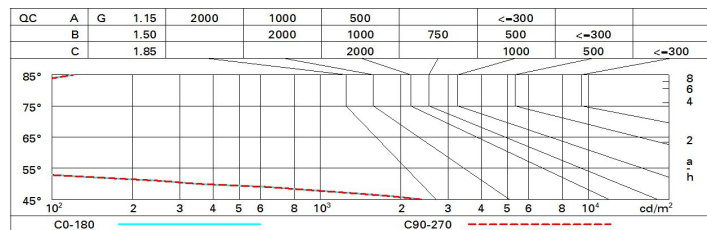

UGR diagram

Corrected UGR values (at 3850 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	17.2	19.0	17.5	19.3	19.6	17.2	19.0	17.5	19.3	19.6
	3H	17.1	18.3	17.4	18.6	19.0	17.1	18.3	17.4	18.6	19.0
	4H	17.0	18.1	17.4	18.4	18.8	17.0	18.1	17.4	18.4	18.8
	6H	16.9	18.0	17.3	18.3	18.7	16.9	18.0	17.3	18.3	18.7
	8H	16.8	17.9	17.2	18.3	18.6	16.8	17.9	17.2	18.3	18.6
	12H	16.8	17.8	17.2	18.2	18.6	16.8	17.8	17.2	18.2	18.6
4H	2H	17.0	18.1	17.4	18.4	18.8	17.0	18.1	17.4	18.4	18.8
	3H	16.8	17.8	17.2	18.2	18.6	16.8	17.8	17.2	18.2	18.6
	4H	16.7	17.7	17.1	18.1	18.5	16.7	17.7	17.1	18.1	18.5
	6H	16.4	17.8	16.9	18.2	18.6	16.4	17.8	16.9	18.2	18.6
	8H	16.3	17.8	16.8	18.2	18.7	16.3	17.8	16.8	18.2	18.7
	12H	16.2	17.8	16.7	18.3	18.8	16.2	17.8	16.7	18.3	18.8
8H	4H	16.3	17.8	16.8	18.2	18.7	16.3	17.8	16.8	18.2	18.7
	6H	16.2	17.7	16.7	18.1	18.7	16.2	17.7	16.7	18.1	18.7
	8H	16.2	17.5	16.7	17.9	18.5	16.2	17.5	16.7	17.9	18.5
	12H	16.2	17.2	16.7	17.7	18.2	16.2	17.2	16.7	17.7	18.2
12H	4H	16.2	17.8	16.7	18.3	18.8	16.2	17.8	16.7	18.3	18.8
	6H	16.2	17.5	16.7	17.9	18.5	16.2	17.5	16.7	17.9	18.5
	8H	16.2	17.2	16.7	17.7	18.2	16.2	17.2	16.7	17.7	18.2
Variations with the observer position at spacing:											
S =	1.0H	5.1 / -31.3					5.1 / -31.3				
	1.5H	7.9 / -31.6					7.9 / -31.6				
	2.0H	9.9 / -31.8					9.9 / -31.8				