


Last information update: October 2020

**Product configuration: 6315+L080**

6315: Spotlight with straight rod L.300 50 W 12 V QR CBC 51

**Product code**6315: Spotlight with straight rod L.300 50 W 12 V QR CBC 51 **Attention! Code no longer in production****Technical description**

Floodlight made up of a diecast aluminium cylinder containing the ceramic lampholder for dichroic lamps. The fitting comes standard with the articulated system covered by iGuzzini patent which allows the lamp to be positioned through 360° vertically and 140° horizontally, while ensuring power supply to the light source. The aluminium rod allows for mechanical and electrical connection to the track by means of a special adapter.

**Installation**

Application to electrified track by adaptor, to false ceiling by plate with polycarbonate springs (cod.6092) or base with built-in transformer (cod.6091).

**Colour**

White (01) | Grey (15)

**Mounting**

lv track pendant

**Notes**

For the photometric data of the fitting refer to the photometric data of the light sources used.

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	1027	CRI:	100
W system:	50	Colour temperature [K]:	3000
lm source:	1027	Lamp maximum intensity	1100
W source:	50	[cd]:	
Luminous efficiency (lm/W, real value):	20.5	Ballast losses [W]:	0
lm in emergency mode:	-	Lamp code:	L080
Total light flux at or above an angle of 90° [Lm]:	0	Socket:	GU5,3
Light Output Ratio (L.O.R.) [%]:	100	Number of lamps for optical assembly:	1
Beam angle [°]:	58°	ZVEI Code:	QR-CBC 51
		Number of optical assemblies:	1


**Polar**

	<b>CIE</b> nL 1.00 81-96-100-100-100 UGR 25,3-25,3 <b>DIN</b> A.61 <b>UTE</b> 1.00B+0.00T F*1=814 F*1+F*2=960 F*1+F*2+F*3=998	<b>Lux</b>			
		h	d	Em	E <sub>max</sub>
		1	1.1	793	1103
		2	2.2	198	276
		3	3.3	88	123
4	4.4	50	69		

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	82	75	70	67	74	70	69	65	65
1.0	87	81	76	73	80	76	75	71	71
1.5	94	89	86	83	88	85	84	80	80
2.0	98	95	92	89	93	90	89	86	86
2.5	101	98	95	93	96	94	93	89	89
3.0	102	100	98	96	98	97	95	92	92
4.0	104	102	101	99	100	99	98	95	95
5.0	105	104	102	101	102	101	99	96	96

Luminance curve limit

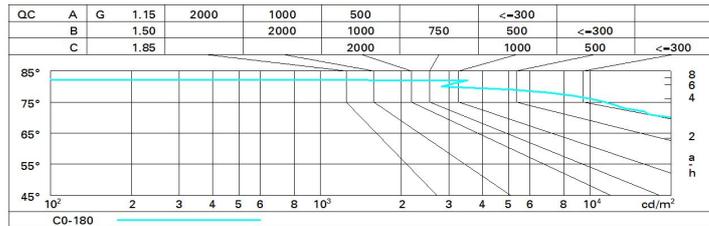

UGR diagram

Corrected UGR values (at 1027 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling	cav	walls	work pl.	Room dim	x	y					
0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	0.70	0.70
0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	0.50	0.30
0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	24.9	25.7	25.2	26.0	26.2	24.9	25.7	25.2	26.0	26.2
	3H	25.1	25.9	25.5	26.1	26.4	25.2	25.9	25.5	26.2	26.5
	4H	25.1	25.8	25.5	26.1	26.4	25.2	25.8	25.5	26.1	26.5
	6H	25.0	25.7	25.4	26.0	26.3	25.1	25.7	25.4	26.0	26.4
	8H	25.0	25.6	25.4	25.9	26.3	25.1	25.7	25.4	26.0	26.3
	12H	25.0	25.5	25.4	25.9	26.2	25.0	25.6	25.4	26.0	26.3
4H	2H	25.2	25.8	25.5	26.1	26.5	25.1	25.8	25.5	26.1	26.4
	3H	25.4	26.0	25.8	26.3	26.7	25.4	25.9	25.8	26.3	26.6
	4H	25.4	25.9	25.8	26.3	26.6	25.4	25.9	25.8	26.3	26.6
	6H	25.3	25.8	25.8	26.2	26.6	25.3	25.8	25.8	26.2	26.6
	8H	25.3	25.7	25.7	26.1	26.5	25.3	25.7	25.7	26.1	26.6
	12H	25.2	25.6	25.7	26.0	26.5	25.3	25.6	25.7	26.0	26.5
8H	4H	25.3	25.7	25.7	26.1	26.6	25.3	25.7	25.7	26.1	26.5
	6H	25.2	25.6	25.7	26.0	26.5	25.2	25.6	25.7	26.0	26.5
	8H	25.2	25.5	25.7	25.9	26.4	25.2	25.5	25.7	25.9	26.4
	12H	25.1	25.4	25.6	25.9	26.4	25.1	25.4	25.6	25.9	26.4
12H	4H	25.3	25.6	25.7	26.0	26.5	25.2	25.6	25.7	26.0	26.5
	6H	25.2	25.5	25.7	25.9	26.4	25.2	25.5	25.7	25.9	26.4
	8H	25.1	25.4	25.6	25.9	26.4	25.1	25.4	25.6	25.9	26.4
Variations with the observer position at spacing:											
S =	1.0H	1.3 / -0.6					1.3 / -0.6				
	1.5H	2.4 / -2.1					2.4 / -2.1				
	2.0H	3.8 / -5.0					3.8 / -5.0				