

Laser Blade XS



Design iGuzzini

iGuzzini

Last information update: October 2024

Product configuration: Q888

Q888: Ceiling-mounted LB XS Linear GL Pro - 5 cells - remote driver

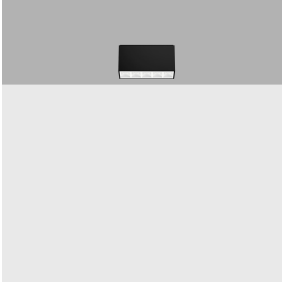

Product code

Q888: Ceiling-mounted LB XS Linear GL Pro - 5 cells - remote driver

Technical description

Ceiling-mounted luminaire with 5 optic elements for LED lamps - fixed optics with metallised thermoplastic high definition Opti-Beam reflectors. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient luminous flux optimised by a special diffuser screen that reduces direct glare significantly. Extruded aluminium main body and technical dissipation unit - shaped steel fixing plate. Ballast not included, available with separate code.

Installation

Ceiling-mounted with surface fixing plate (screws and screw anchors not included) - external locking system.

Colour

White (01) | Black/white (F2)

Weight (Kg)

0.15

Mounting

ceiling surface

Wiring

Cables supplied with quick-coupling terminals for connecting to power supply line.


Complies with EN60598-1 and pertinent regulations



Technical data

| | | | |
|--|------|---------------------------------------|---------------------------------|
| lm system: | 642 | Colour temperature [K]: | 3000 |
| W system: | 9.9 | MacAdam Step: | 2 |
| lm source: | 930 | Life Time LED 1: | > 50,000h - L80 - B10 (Ta 25°C) |
| W source: | 9.9 | Lamp code: | LED |
| Luminous efficiency (lm/W, real value): | 64.8 | Number of lamps for optical assembly: | 1 |
| lm in emergency mode: | - | ZVEI Code: | LED |
| Total light flux at or above an angle of 90° [Lm]: | 0 | Number of optical assemblies: | 1 |
| Light Output Ratio (L.O.R.) [%]: | 69 | LED current [mA]: | 700 |
| CRI (minimum): | 90 | | |


Polar
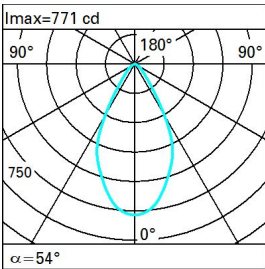
| | | | | |
|---|--|-----|-----|------|
|  <p>Imax=771 cd</p> <p>90° 180° 90°</p> <p>750</p> <p>0°</p> <p>$\alpha = 54^\circ$</p> | CIE nL 0.69 88-98-100-100-69 UGR 22.0-21.9 DIN A.61 UTE 0.69A+0.00T F*1=877 F*1+F*2=981 F*1+F*2+F*3=997 | | | |
| | Lux | | | |
| | h | d | Em | Emax |
| | 1 | 1 | 571 | 771 |
| | 2 | 2 | 143 | 193 |
| | 3 | 3.1 | 63 | 86 |
| | 4 | 4.1 | 36 | 48 |

Utilisation factors

| R | 77 | 75 | 73 | 71 | 55 | 53 | 33 | 00 | DRR |
|------|----|----|----|----|----|----|----|----|-----|
| K0.8 | 58 | 54 | 51 | 49 | 54 | 51 | 51 | 48 | 69 |
| 1.0 | 62 | 58 | 55 | 53 | 57 | 55 | 54 | 52 | 75 |
| 1.5 | 66 | 63 | 61 | 59 | 62 | 60 | 60 | 57 | 83 |
| 2.0 | 69 | 66 | 65 | 63 | 65 | 64 | 63 | 61 | 88 |
| 2.5 | 70 | 68 | 67 | 66 | 67 | 66 | 65 | 63 | 92 |
| 3.0 | 71 | 70 | 69 | 68 | 69 | 68 | 67 | 65 | 94 |
| 4.0 | 72 | 71 | 70 | 70 | 70 | 69 | 68 | 66 | 96 |
| 5.0 | 73 | 72 | 71 | 71 | 71 | 70 | 69 | 67 | 97 |

Luminance curve limit

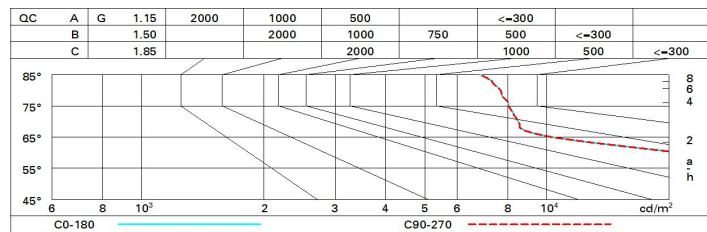

UGR diagram

| Corrected UGR values (at 930 lm bare lamp luminous flux) | | | | | | | | | | | |
|--|-----|---------------------|------|------|------|------|-------------------|------|------|------|------|
| Reflect.: ceiling/cav walls work pl. Room dim x y | | viewed crosswise | | | | | viewed endwise | | | | |
| 2H | 2H | 22.0 | 22.7 | 22.3 | 23.0 | 23.2 | 22.0 | 22.7 | 22.3 | 23.0 | 23.2 |
| | 3H | 22.0 | 22.6 | 22.3 | 22.9 | 23.2 | 22.0 | 22.7 | 22.3 | 22.9 | 23.2 |
| | 4H | 22.0 | 22.6 | 22.3 | 22.9 | 23.2 | 22.0 | 22.6 | 22.3 | 22.9 | 23.2 |
| | 6H | 21.9 | 22.5 | 22.3 | 22.8 | 23.1 | 21.9 | 22.4 | 22.2 | 22.8 | 23.1 |
| | 8H | 21.9 | 22.5 | 22.3 | 22.8 | 23.1 | 21.8 | 22.4 | 22.2 | 22.7 | 23.1 |
| | 12H | 21.9 | 22.4 | 22.3 | 22.8 | 23.1 | 21.8 | 22.3 | 22.2 | 22.7 | 23.0 |
| 4H | 2H | 22.0 | 22.6 | 22.3 | 22.9 | 23.2 | 22.0 | 22.6 | 22.3 | 22.9 | 23.2 |
| | 3H | 22.0 | 22.5 | 22.3 | 22.8 | 23.2 | 22.0 | 22.5 | 22.4 | 22.8 | 23.2 |
| | 4H | 22.0 | 22.4 | 22.4 | 22.8 | 23.2 | 22.0 | 22.4 | 22.4 | 22.8 | 23.2 |
| | 6H | 22.0 | 22.4 | 22.4 | 22.8 | 23.2 | 21.9 | 22.3 | 22.3 | 22.7 | 23.1 |
| | 8H | 22.0 | 22.3 | 22.4 | 22.7 | 23.2 | 21.9 | 22.2 | 22.3 | 22.7 | 23.1 |
| | 12H | 21.9 | 22.3 | 22.4 | 22.7 | 23.2 | 21.8 | 22.2 | 22.3 | 22.6 | 23.1 |
| 8H | 4H | 21.9 | 22.2 | 22.3 | 22.7 | 23.1 | 22.0 | 22.3 | 22.4 | 22.7 | 23.2 |
| | 6H | 21.9 | 22.2 | 22.4 | 22.7 | 23.1 | 21.9 | 22.2 | 22.4 | 22.7 | 23.2 |
| | 8H | 21.9 | 22.2 | 22.4 | 22.7 | 23.2 | 21.9 | 22.2 | 22.4 | 22.7 | 23.2 |
| | 12H | 21.9 | 22.2 | 22.4 | 22.6 | 23.2 | 21.9 | 22.1 | 22.4 | 22.6 | 23.1 |
| 12H | 4H | 21.8 | 22.2 | 22.3 | 22.6 | 23.1 | 21.9 | 22.3 | 22.4 | 22.7 | 23.2 |
| | 6H | 21.9 | 22.1 | 22.4 | 22.6 | 23.1 | 21.9 | 22.2 | 22.4 | 22.7 | 23.2 |
| | 8H | 21.9 | 22.1 | 22.4 | 22.6 | 23.1 | 21.9 | 22.2 | 22.4 | 22.6 | 23.2 |
| Variations with the observer position at spacing: | | | | | | | | | | | |
| S = | | 1.0H | | | | | 2.4 / -2.2 | | | | |
| | | 1.5H | | | | | 4.5 / -4.7 | | | | |
| | | 2.0H | | | | | 6.3 / -6.0 | | | | |