

Laser Blade XS



Design iGuzzini

iGuzzini

Last information update: May 2024

Product configuration: Q552

Q552: Minimal 5 cells - Medium beam - LED

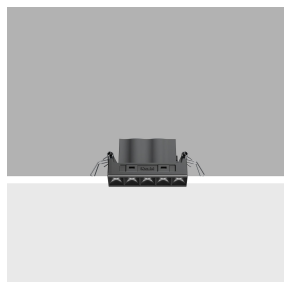

Product code

Q552: Minimal 5 cells - Medium beam - LED **Attention! Code no longer in production**

Technical description

Linear miniaturised recessed luminaire with 5 optical elements for LED lamps - fixed optic. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient flow and a high level of controlled glare visual comfort. Main body with die-cast zamak radiant surface, minimal (frameless) version for mounting flush with the ceiling. Metallised, thermoplastic, high definition Opti Beam reflectors, integrated in a set-back position in the anti-glare screen. Supplied with a power supply unit connected to the luminaire.

Installation

Recessed with steel wire springs on the specific adapter (included) which allows flush-mounting with the ceiling. Adapter fixed to false ceiling (compatible thicknesses of 12.5 / 15 / 20 mm) with screws; subsequent filling and smoothing operations; insertion of luminaire body and aesthetic end finishing. A special protective sheath allows finishing operations on the plasterboard to be simplified and speeded up. Preparation hole 28 x 94.

Colour

White (01) | Black (04) | Gold (14) | Burnished chrome (E6)

Weight (Kg)

0.37

Mounting

wall recessed|ceiling recessed

Wiring

On the power supply unit with terminal board included.

Notes

The special steel wire spring provided is required to facilitate the eventual extraction of the recessed body once it has been inserted.


Complies with EN60598-1 and pertinent regulations



Technical data

| | | | |
|--|------|---------------------------------------|---------------------------------|
| Im system: | 577 | CRI (minimum): | 90 |
| W system: | 12.7 | Colour temperature [K]: | 2700 |
| Im source: | 730 | MacAdam Step: | 3 |
| W source: | 9.7 | Life Time LED 1: | > 50,000h - L80 - B10 (Ta 25°C) |
| Luminous efficiency (Im/W, real value): | 45.4 | Voltage [Vin]: | 230 |
| Im in emergency mode: | - | Lamp code: | LED |
| Total light flux at or above an angle of 90° [Lm]: | 0 | Number of lamps for optical assembly: | 1 |
| Light Output Ratio (L.O.R.) [%]: | 79 | ZVEI Code: | LED |
| Beam angle [°]: | 24° | Number of optical assemblies: | 1 |


Polar

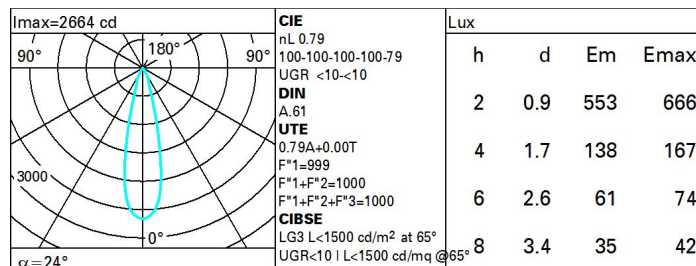

Utilisation factors

| R | 77 | 75 | 73 | 71 | 55 | 53 | 33 | 00 | DRR |
|------|----|----|----|----|----|----|----|----|-----|
| K0.8 | 71 | 68 | 65 | 63 | 67 | 65 | 64 | 62 | 78 |
| 1.0 | 75 | 71 | 69 | 67 | 70 | 68 | 68 | 66 | 83 |
| 1.5 | 78 | 76 | 74 | 72 | 75 | 73 | 72 | 70 | 89 |
| 2.0 | 81 | 79 | 77 | 76 | 78 | 76 | 76 | 73 | 93 |
| 2.5 | 82 | 81 | 80 | 79 | 80 | 79 | 78 | 76 | 96 |
| 3.0 | 83 | 82 | 81 | 81 | 81 | 80 | 79 | 77 | 98 |
| 4.0 | 84 | 83 | 83 | 82 | 82 | 82 | 80 | 79 | 99 |
| 5.0 | 84 | 84 | 84 | 83 | 83 | 82 | 81 | 79 | 100 |

Luminance curve limit

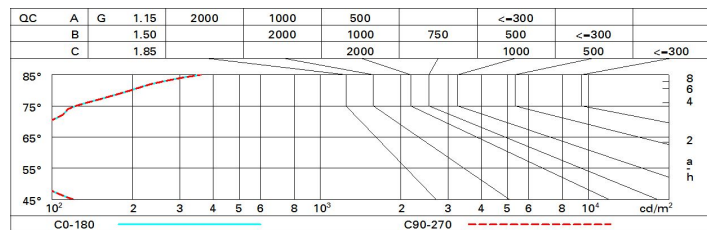

UGR diagram

| Corrected UGR values (at 730 lm bare lamp luminous flux) | | | | | | | | | | | |
|--|-----|---------------------|-----|-----|-----|-----|-------------------|-----|-----|-----|-----|
| Reflect.: ceiling/cav walls work pl. Room dim x y | | viewed crosswise | | | | | viewed endwise | | | | |
| 2H | 2H | 2.3 | 4.4 | 2.6 | 4.7 | 5.0 | 2.3 | 4.4 | 2.6 | 4.7 | 5.0 |
| | 3H | 2.1 | 3.7 | 2.5 | 4.1 | 4.4 | 2.1 | 3.7 | 2.5 | 4.1 | 4.4 |
| | 4H | 2.1 | 3.4 | 2.4 | 3.7 | 4.1 | 2.1 | 3.4 | 2.4 | 3.7 | 4.1 |
| | 6H | 2.0 | 3.1 | 2.4 | 3.4 | 3.8 | 2.0 | 3.0 | 2.4 | 3.4 | 3.7 |
| | 8H | 2.0 | 3.0 | 2.4 | 3.4 | 3.7 | 2.0 | 3.0 | 2.4 | 3.3 | 3.7 |
| | 12H | 2.0 | 3.0 | 2.4 | 3.3 | 3.7 | 1.9 | 2.9 | 2.3 | 3.3 | 3.7 |
| 4H | 2H | 2.1 | 3.4 | 2.4 | 3.7 | 4.1 | 2.1 | 3.4 | 2.4 | 3.7 | 4.1 |
| | 3H | 1.9 | 2.9 | 2.3 | 3.3 | 3.7 | 1.9 | 3.0 | 2.3 | 3.3 | 3.7 |
| | 4H | 1.8 | 2.8 | 2.2 | 3.2 | 3.6 | 1.8 | 2.8 | 2.2 | 3.2 | 3.6 |
| | 6H | 1.5 | 3.2 | 1.9 | 3.6 | 4.1 | 1.5 | 3.1 | 1.9 | 3.6 | 4.1 |
| | 8H | 1.3 | 3.2 | 1.8 | 3.7 | 4.2 | 1.3 | 3.2 | 1.8 | 3.7 | 4.2 |
| | 12H | 1.3 | 3.2 | 1.8 | 3.7 | 4.2 | 1.2 | 3.2 | 1.7 | 3.7 | 4.2 |
| 8H | 4H | 1.3 | 3.2 | 1.8 | 3.7 | 4.2 | 1.3 | 3.2 | 1.8 | 3.7 | 4.2 |
| | 6H | 1.2 | 3.0 | 1.7 | 3.5 | 4.0 | 1.2 | 3.0 | 1.7 | 3.5 | 4.0 |
| | 8H | 1.2 | 2.8 | 1.7 | 3.3 | 3.8 | 1.2 | 2.8 | 1.7 | 3.3 | 3.8 |
| | 12H | 1.4 | 2.4 | 1.9 | 2.9 | 3.5 | 1.4 | 2.4 | 1.9 | 2.9 | 3.4 |
| 12H | 4H | 1.2 | 3.2 | 1.7 | 3.7 | 4.2 | 1.3 | 3.2 | 1.8 | 3.7 | 4.2 |
| | 6H | 1.2 | 2.8 | 1.7 | 3.3 | 3.8 | 1.3 | 2.8 | 1.8 | 3.3 | 3.9 |
| | 8H | 1.4 | 2.4 | 1.9 | 2.9 | 3.4 | 1.4 | 2.4 | 1.9 | 2.9 | 3.5 |
| Variations with the observer position at spacing: | | | | | | | | | | | |
| S = | | 1.0H | | | | | 6.9 / -11.5 | | | | |
| | | 1.5H | | | | | 9.7 / -11.7 | | | | |
| | | 2.0H | | | | | 11.7 / -11.8 | | | | |