




Wirkungsgrad

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	71	68	66	70	68	68	65	78
1.0	78	75	72	70	74	72	71	69	83
1.5	82	80	77	76	79	77	76	74	89
2.0	85	83	81	80	82	80	79	77	93
2.5	86	85	84	83	84	83	82	79	96
3.0	87	86	85	85	85	84	83	81	98
4.0	88	87	87	86	86	86	84	82	99
5.0	89	88	88	88	87	87	85	83	100

Söllner-Diagramm

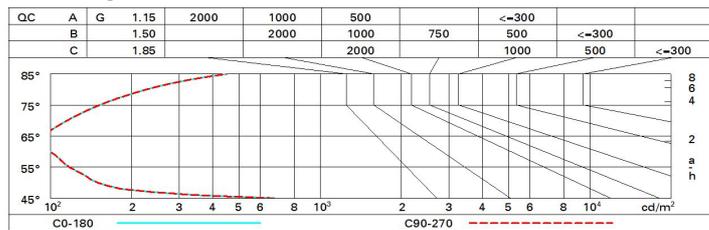

UGR-Diagramm

Corrected UGR values (at 1450 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	6.6	7.2	6.9	7.4	7.7	6.6	7.2	6.9	7.4	7.7
	3H	6.5	7.0	6.8	7.3	7.6	6.5	7.0	6.8	7.3	7.6
	4H	6.4	6.9	6.8	7.2	7.5	6.4	6.9	6.8	7.2	7.5
	6H	6.4	6.8	6.7	7.1	7.4	6.4	6.8	6.7	7.1	7.4
	8H	6.3	6.8	6.7	7.1	7.4	6.3	6.7	6.7	7.1	7.4
12H	6.3	6.7	6.7	7.0	7.4	6.3	6.7	6.7	7.0	7.4	
4H	2H	6.4	6.9	6.8	7.2	7.5	6.4	6.9	6.8	7.2	7.5
	3H	6.3	6.7	6.7	7.0	7.4	6.3	6.7	6.7	7.0	7.4
	4H	6.2	6.6	6.6	6.9	7.3	6.2	6.6	6.6	6.9	7.3
	6H	6.1	6.4	6.5	6.8	7.2	6.1	6.4	6.5	6.8	7.2
	8H	6.1	6.4	6.5	6.8	7.2	6.1	6.4	6.5	6.8	7.2
12H	6.0	6.3	6.5	6.7	7.2	6.0	6.3	6.5	6.7	7.2	
8H	4H	6.1	6.4	6.5	6.8	7.2	6.1	6.4	6.5	6.8	7.2
	6H	6.0	6.2	6.4	6.7	7.1	6.0	6.2	6.4	6.7	7.1
	8H	5.9	6.1	6.4	6.6	7.1	5.9	6.1	6.4	6.6	7.1
	12H	5.9	6.1	6.4	6.6	7.1	5.9	6.1	6.4	6.6	7.1
12H	4H	6.0	6.3	6.5	6.7	7.2	6.0	6.3	6.5	6.7	7.2
	6H	5.9	6.1	6.4	6.6	7.1	5.9	6.1	6.4	6.6	7.1
	8H	5.9	6.1	6.4	6.5	7.1	5.9	6.1	6.4	6.6	7.1

Variations with the observer position at spacing:

S =	1.0H	7.0 / -14.5	7.0 / -14.5
	1.5H	9.8 / -14.7	9.8 / -14.7
	2.0H	11.8 / -14.8	11.8 / -14.8