


Last information update: May 2025

Product configuration: N135.Y

N135.Y: wall-washer luminaire - Ø 153 mm - warm white - frame

**Product code**

N135.Y: wall-washer luminaire - Ø 153 mm - warm white - frame

Technical description

Recessed round wall-washer luminaire designed to use a LED lamp with C.O.B. technology. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours and finished with a protective anti-scratch layer to create a vertical downward beam of light. Die-cast aluminium body and passive dissipation system. Product complete with C.O.B. LED lamp in warm white colour tone 3000K (CRI 90).

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 25 mm.

Colour

White / Aluminium (39)

Weight (Kg)

1.22

Mounting

ceiling recessed

Wiring

product complete with DALI components

Notes


TPb rated

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	2117	Colour temperature [K]:	3000
W system:	36.7	MacAdam Step:	2
lm source:	3850	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	33	Lamp code:	LED
Luminous efficiency (lm/W, real value):	57.7	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	55	Control:	DALI-2
CRI (minimum):	90		

Polar

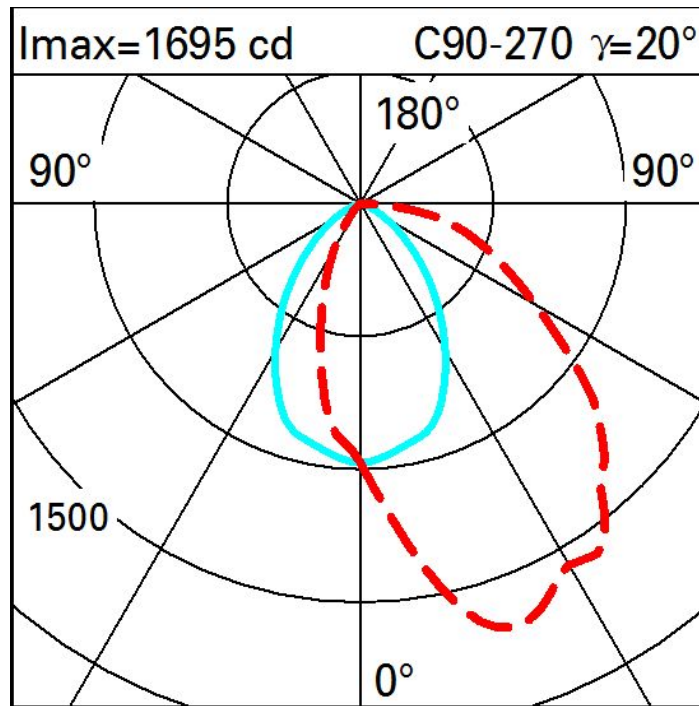

Illuminances

Lux													Wall distance = 1m	
3														
	0.9	4	15	64	248	455	248	64	15	4	0.9			
2	4	12	36	113	311	472	311	113	36	12	4			
	7	18	47	112	205	290	205	112	47	18	7			
1	10	21	43	78	121	154	121	78	43	21	10			
	11	20	34	51	74	91	74	51	34	20	11			
0														
	m	-2	-1	0	1	2	3							