



Polardiagramm

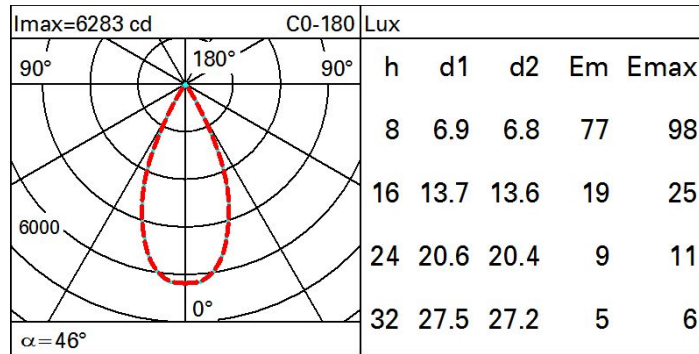

Isolux

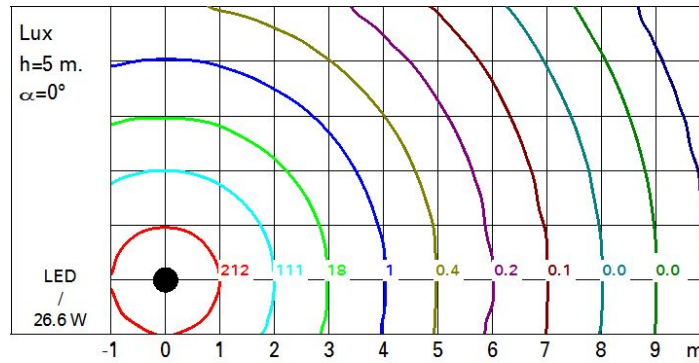

UGR-Diagramm

Corrected UGR values (at 4080 lm bare lamp luminous flux)										
Reflect.:		viewed crosswise					viewed endwise			
ceiling	cav	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise			
x	y									
2H	2H	5.5	6.1	5.7	6.3	6.5	5.6	6.2	5.9	6.5
	3H	5.4	5.9	5.7	6.2	6.5	5.5	6.1	5.8	6.4
	4H	5.3	5.8	5.7	6.1	6.4	5.5	6.0	5.8	6.3
	6H	5.3	5.7	5.6	6.0	6.4	5.4	5.9	5.7	6.2
	8H	5.2	5.7	5.6	6.0	6.3	5.4	5.8	5.7	6.1
4H	2H	5.3	5.8	5.6	6.1	6.4	5.5	6.0	5.8	6.3
	3H	5.2	5.7	5.6	6.0	6.3	5.4	5.8	5.8	6.2
	4H	5.2	5.5	5.6	5.9	6.3	5.3	5.7	5.7	6.1
	6H	5.1	5.4	5.5	5.8	6.2	5.2	5.6	5.7	6.0
	8H	5.1	5.4	5.5	5.8	6.2	5.2	5.5	5.6	5.9
8H	2H	5.0	5.3	5.5	5.7	6.2	5.2	5.4	5.6	5.9
	3H	5.0	5.2	5.4	5.7	6.1	5.1	5.4	5.6	5.8
	4H	4.9	5.1	5.4	5.6	6.1	5.1	5.3	5.6	5.8
	6H	4.9	5.1	5.4	5.6	6.1	5.0	5.2	5.5	5.7
	8H	4.9	5.1	5.4	5.6	6.1	5.0	5.2	5.5	5.7
12H	4H	5.0	5.3	5.5	5.7	6.2	5.2	5.4	5.6	5.9
	6H	4.9	5.1	5.4	5.6	6.1	5.1	5.3	5.6	5.8
	8H	4.9	5.1	5.4	5.6	6.1	5.0	5.2	5.5	5.7
Variations with the observer position at spacing:										
S =		0.1 / -7.2					0.1 / -7.3			
		8.8 / -8.7					8.8 / -8.8			
		10.8 / -9.6					10.8 / -9.7			