

## Reflex

Design iGuzzini

iGuzzini

Last information update: May 2024

### Product configuration: P519

P519: Fixed circular recessed luminaire - Ø 212 mm - neutral white - white optic



#### Product code

P519: Fixed circular recessed luminaire - Ø 212 mm - neutral white - white optic **Attention! Code no longer in production**

#### Technical description

Fixed round luminaire designed to use a LED lamp with C.O.B. technology. Version with rim for surface-mounting. Reflector painted white with a layer of anti-scratch protection. Die-cast aluminium body and passive dissipation system. Product complete with LED lamp in neutral white colour tone (4,000K). General lighting beam.

#### Installation

Recessed using torsion springs which allow easy installation in false ceilings with thicknesses ranging from 1 mm to 25 mm.


**Colour**  
White (01)

**Weight (Kg)**  
2.03

**Mounting**  
ceiling recessed

**Wiring**  
product complete with an electronic ballast

Complies with EN60598-1 and pertinent regulations



#### Technical data

|  |       |                                       |                                 |
|--|-------|---------------------------------------|---------------------------------|
| lm system:   | 4169  | CRI (minimum):                        | 80                              |
| W system:  | 35.4  | Colour temperature [K]:               | 4000                            |
| lm source:   | 5150  | MacAdam Step:                         | 2                               |
| W source:  | 31    | Life Time LED 1:                      | > 50,000h - L80 - B10 (Ta 25°C) |
| Luminous efficiency (lm/W, real value):            | 117.8 | Lamp code:                            | LED                             |
| lm in emergency mode:                              | -     | Number of lamps for optical assembly: | 1                               |
| Total light flux at or above an angle of 90° [Lm]: | 0     | ZVEI Code:                            | LED                             |
| Light Output Ratio (L.O.R.) [%]:                   | 81    | Number of optical assemblies:         | 1                               |
| Beam angle [°]:                                    | 62°   |                                       |                                 |


#### Polar

| Imax=3986 cd |      | CIE             |  | Lux |     |     |                  |
|--------------|------|-----------------|--|-----|-----|-----|------------------|
| 90°          | 180° | nL 0.81         |  | h   | d   | Em  | E <sub>max</sub> |
|              |      | 85-95-99-100-81 |  | 2   | 2.4 | 720 | 996              |
|              |      | UGR 21.4-21.0   |  | 4   | 4.8 | 180 | 249              |
|              |      | DIN A 61        |  | 6   | 7.2 | 80  | 111              |
|              |      | UTE 0.81A+0.00T |  | 8   | 9.6 | 45  | 62               |
|              |      | F*1=848         |  |     |     |     |                  |
|              |      | F*1+F*2=954     |  |     |     |     |                  |
|              |      | F*1+F*2+F*3=989 |  |     |     |     |                  |
| α=62°        |      |                 |  |     |     |     |                  |

# Utilisation factors

| R    | 77 | 75 | 73 | 71 | 55 | 53 | 33 | 00 | DRR |
|------|----|----|----|----|----|----|----|----|-----|
| K0.8 | 67 | 62 | 59 | 56 | 61 | 58 | 58 | 54 | 67  |
| 1.0  | 71 | 67 | 63 | 61 | 66 | 63 | 62 | 59 | 73  |
| 1.5  | 77 | 73 | 70 | 68 | 72 | 69 | 68 | 65 | 81  |
| 2.0  | 80 | 77 | 75 | 73 | 76 | 74 | 73 | 70 | 86  |
| 2.5  | 82 | 79 | 78 | 76 | 78 | 76 | 76 | 73 | 90  |
| 3.0  | 83 | 81 | 80 | 78 | 80 | 78 | 77 | 75 | 92  |
| 4.0  | 84 | 83 | 82 | 81 | 81 | 80 | 79 | 77 | 95  |
| 5.0  | 85 | 84 | 83 | 82 | 82 | 82 | 80 | 78 | 96  |

# Luminance curve limit

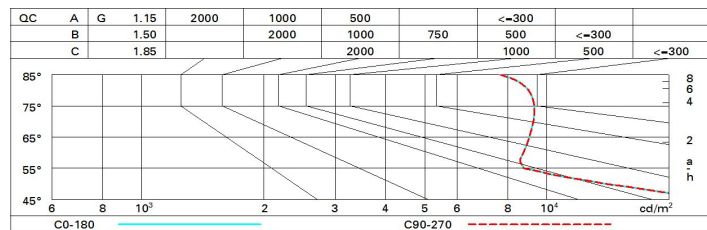

# UGR diagram

| Corrected UGR values (at 5150 lm bare lamp luminous flux)        |      |                     |      |      |      |      |                   |      |      |      |      |
|--|------|---------------------|------|------|------|------|-------------------|------|------|------|------|
| Reflect.:<br>ceiling/cav<br>walls<br>work pl.<br>Room dim<br>x y |      | viewed<br>crosswise |      |      |      |      | viewed<br>endwise |      |      |      |      |
|  |      | 0.70                | 0.70 | 0.50 | 0.50 | 0.30 | 0.70              | 0.70 | 0.50 | 0.50 | 0.30 |
|  |      | 0.50                | 0.30 | 0.50 | 0.30 | 0.30 | 0.50              | 0.30 | 0.50 | 0.30 | 0.30 |
|  |      | 0.20                | 0.20 | 0.20 | 0.20 | 0.20 | 0.20              | 0.20 | 0.20 | 0.20 | 0.20 |
|  |      |                     |      |      |      |      |                   |      |      |      |      |
| 2H   | 2H   | 19.7                | 20.4 | 20.0 | 20.7 | 20.9 | 19.7              | 20.4 | 20.0 | 20.7 | 20.9 |
|  | 3H   | 20.2                | 20.8 | 20.5 | 21.1 | 21.4 | 19.7              | 20.4 | 20.1 | 20.7 | 21.0 |
|  | 4H   | 20.4                | 21.0 | 20.8 | 21.3 | 21.6 | 19.7              | 20.4 | 20.1 | 20.7 | 21.0 |
|  | 6H   | 20.7                | 21.3 | 21.0 | 21.6 | 21.9 | 19.7              | 20.3 | 20.1 | 20.6 | 20.9 |
|  | 8H   | 20.8                | 21.3 | 21.2 | 21.7 | 22.0 | 19.7              | 20.3 | 20.1 | 20.6 | 20.9 |
|  | 12H  | 20.8                | 21.4 | 21.2 | 21.7 | 22.1 | 19.7              | 20.2 | 20.1 | 20.5 | 20.9 |
|  |      |                     |      |      |      |      |                   |      |      |      |      |
| 4H   | 2H   | 19.7                | 20.4 | 20.1 | 20.7 | 21.0 | 20.4              | 21.0 | 20.8 | 21.3 | 21.6 |
|  | 3H   | 20.4                | 20.9 | 20.8 | 21.3 | 21.6 | 20.7              | 21.2 | 21.1 | 21.5 | 21.9 |
|  | 4H   | 20.8                | 21.3 | 21.2 | 21.7 | 22.0 | 20.8              | 21.3 | 21.2 | 21.7 | 22.0 |
|  | 6H   | 21.2                | 21.6 | 21.6 | 22.0 | 22.4 | 20.9              | 21.3 | 21.4 | 21.7 | 22.2 |
|  | 8H   | 21.4                | 21.7 | 21.8 | 22.2 | 22.6 | 21.0              | 21.3 | 21.4 | 21.7 | 22.2 |
|  | 12H  | 21.5                | 21.8 | 21.9 | 22.2 | 22.7 | 21.0              | 21.3 | 21.4 | 21.7 | 22.2 |
|  |      |                     |      |      |      |      |                   |      |      |      |      |
| 8H   | 4H   | 21.0                | 21.3 | 21.4 | 21.7 | 22.2 | 21.4              | 21.7 | 21.8 | 22.2 | 22.6 |
|  | 6H   | 21.5                | 21.8 | 22.0 | 22.2 | 22.7 | 21.6              | 21.9 | 22.1 | 22.4 | 22.8 |
|  | 8H   | 21.7                | 22.0 | 22.2 | 22.4 | 22.9 | 21.7              | 22.0 | 22.2 | 22.4 | 22.9 |
|  | 12H  | 21.9                | 22.1 | 22.4 | 22.6 | 23.1 | 21.8              | 22.0 | 22.3 | 22.5 | 23.0 |
|  |      |                     |      |      |      |      |                   |      |      |      |      |
| 12H  | 4H   | 21.0                | 21.3 | 21.4 | 21.7 | 22.2 | 21.5              | 21.8 | 21.9 | 22.2 | 22.7 |
|  | 6H   | 21.5                | 21.8 | 22.0 | 22.3 | 22.8 | 21.7              | 22.0 | 22.2 | 22.5 | 23.0 |
|  | 8H   | 21.8                | 22.0 | 22.3 | 22.5 | 23.0 | 21.9              | 22.1 | 22.4 | 22.6 | 23.1 |
|  |      |                     |      |      |      |      |                   |      |      |      |      |
| Variations with the observer position at spacing:                |      |                     |      |      |      |      |                   |      |      |      |      |
| S =  | 1.0H | 1.6 / -1.4          |      |      |      |      | 1.6 / -1.4        |      |      |      |      |
|  | 1.5H | 3.4 / -1.6          |      |      |      |      | 3.4 / -1.6        |      |      |      |      |
|  | 2.0H | 5.0 / -1.6          |      |      |      |      | 5.0 / -1.6        |      |      |      |      |