

Last information update: May 2024

Product configuration: P384.01

P384.01: Fixed round recessed luminaire - Minimal - LED - Wall Washer - White

**Product code**P384.01: Fixed round recessed luminaire - Minimal - LED - Wall Washer - White **Attention! Code no longer in production****Technical description**

Minimal round recessed luminaire (frameless). Fixed Wall Washer version: the optic system is designed to aim the light flow on a vertical surface with no shadow zones and a precise outline. The main body is made of die-cast aluminium with a radiant surface that guarantees optimum heat dissipation. Die-cast aluminium structure installed flush with ceiling. Adapter for false ceilings between 12.5 and 25 mm thick. The optic unit includes two shaped metallized thermoplastic reflectors, a PMMA refractor/safety screen and a plastic anti-glare casing available in a range of painted and metallised finishes. Quick and easy tool free assembly. High color rendering index 2700K LED. Power unit available with a separate code no.

Installation

For flush with ceiling installation, an adapter is fitted according to the thickness of the false ceiling (12.5 to 25 mm). The following filling and finishing operations are simplified by a special protection template, and the luminaire is recessed in the adapter by means of an anti-fall steel wire spring.

Colour

White (01)

Weight (Kg)

0.23

Mounting

wall recessed|ceiling recessed

Wiring

Direct current ballasts are available with a separate code no.: ON-OFF / 1-10V dimmable / DALI dimmable / Trailing Edge dimmable - the recessed fitting includes a cable and a quick-coupling connector to connect it to the connector on the ballast.

Complies with EN60598-1 and pertinent regulations



IP20

IP44


On the visible part of
the product once installed

pending

Technical data

Im system:	672	Colour temperature [K]:	2700
W system:	9.9	MacAdam Step:	2
Im source:	1200	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	9.9	Lamp code:	LED
Luminous efficiency (lm/W, real value):	67.9	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	56	LED current [mA]:	300
CRI (minimum):	90		

Polar

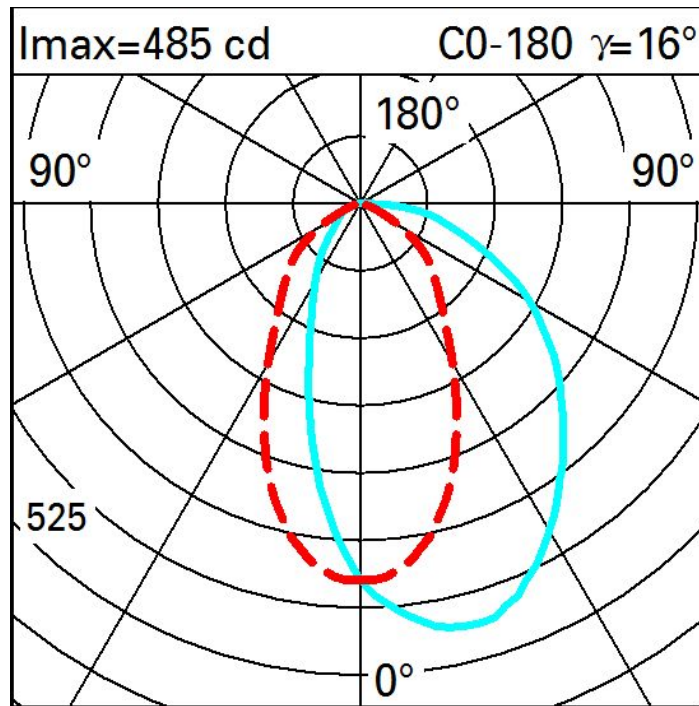

Illuminances

Lux												Wall distance = 1m	
3													
	0.3	0.9	4	18	60	129	60	18	4	0.9	0.3		
2	1	4	11	27	69	116	69	27	11	4	1		
	3	5	11	24	51	71	51	24	11	5	3		
1	3	5	9	19	33	42	33	19	9	5	3		
	3	5	8	14	21	25	21	14	8	5	3		
0													
	m	-2	-1	0	1	2	3						