



Last information update: April 2024

Product configuration: BK02

BK02: Outdoor wall-mounted luminaire - Neutral White LED - max 500mA - Light Blade optic

**Product code**

BK02: Outdoor wall-mounted luminaire - Neutral White LED - max 500mA - Light Blade optic

Technical description

Direct light outdoor wall-mounted luminaire, designed to use neutral white LED lamps, with light blade optic. For wall-mounting with the special base. The luminaire consists of an optical assembly, upper cap and base for fixing to the wall. The optical assembly, upper cap and base are made of die-cast aluminium alloy coated with liquid acrylic paint (grey finish) or textured liquid (white finish) with a high level of resistance to weather and UV rays. The light blade optic lens is made of a two-component material (acrylic and polycarbonate), joined to the optical assembly with silicone. There is a single stainless steel M14x1 cable gland and FEP outlet cables L=150mm, plus an electronic circuit with neutral white LED. The electronic ballast must be ordered separately (max. 500mA). All external screws used are made of A2 stainless steel. The luminaire technical characteristics conform to EN60598-1 standards and particular requirements.

Installation

For wall-mounting with the special aluminium base. Secure using screw anchors for concrete, cement and solid brick. Product can be installed with the light beam in any direction (up, down, right, left, slanting, etc.).

Colour

White (01) | Black (04) | Grey (15) | Rust Brown (F5)

Weight (Kg)

0.28

Mounting

wall arm|wall surface

Wiring

Electronic ballast to be ordered separately.

Notes


Product complete with LED lamp.

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	41	MacAdam Step:	3
W system:	4.2	Life Time LED 1:	100,000h - L80 - B10 (Ta 25°C)
Im source:	590	Life Time LED 2:	98,000h - L80 - B10 (Ta 40°C)
W source:	4.2	Lamp code:	LED
Luminous efficiency (Im/W, real value):	9.8	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	7	Intervallo temperatura ambiente:	from -30°C to 50°C.
CRI (minimum):	80	LED current [mA]:	500
Colour temperature [K]:	4000		

Polar

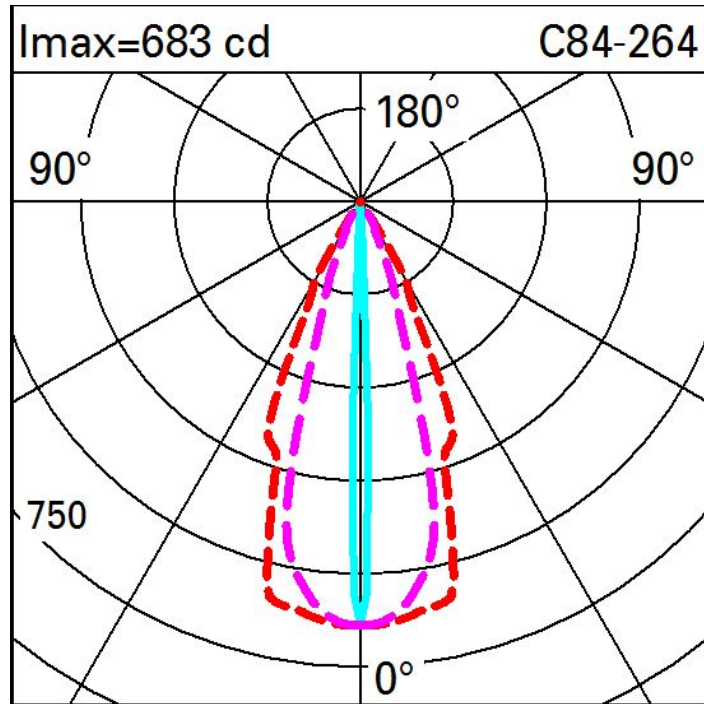

Isolux

