

Underscore X26


Design iGuzzini

iGuzzini

Last information update: June 2023

Product configuration: M860

M860: X26 surface 2000 High Flux



Product code

M860: X26 surface 2000 High Flux **Attention! Code no longer in production**

Technical description

Rigid-profile product for linear LED lighting, designed to be surface-mounted. Extruded aluminium bar structure, with diffusing opal polycarbonate linear screen. Moulded polycarbonate sides and end closing caps. Removing the end closing caps allows direct connection to the next profile thanks to a practical quick-coupling system. Version with 24 LED 24Vdc high emission module (total 24W) - white colour, warm white tone (3100K) colour rendering index - CRI 95 (recommended for use in museums). Ballast not included.

Installation

Profile snap-on fixing on accessory clips (MWJ8); the clips are fixed to the installation surface with screws and screw anchors (not included). Other fixing systems are available: adjustable arms (MWJ5 - L100; MWJ6 - L200), adjustable base (MWJ4)

Colour

Aluminium (12)

Mounting

wall surface|ceiling surface

Wiring

Constant voltage ballasts to be ordered separately: electronic 50W 24V (MWK4) - electronic 70W 24V dimmable 1-10V (MWK5). Power supply end cap with cable (MWJ9 - for connection to the ballast); intermediate power supply cap with cable (MWK0 - for connection between modules)

Notes

For fixing, connections and power supply, use the components available with a separate code. For large installations and considerable lengths, DIN rail mounted electronic ballasts can be used: 9910 (72W) - 9911 (96W) - 9912 (240W)

Complies with EN60598-1 and pertinent regulations




IP40



Technical data

| | | | |
|--|------|---------------------------------------|-------------------------------|
| Im system: | 844 | CRI: | 95 |
| W system: | 28.6 | Colour temperature [K]: | 3000 |
| Im source: | 1680 | Life Time LED 1: | 50,000h - L70 - B20 (Ta 25°C) |
| W source: | 25 | Ballast losses [W]: | 3.6 |
| Luminous efficiency (Im/W, real value): | 29.5 | Lamp code: | LED |
| Im in emergency mode: | - | Number of lamps for optical assembly: | 1 |
| Total light flux at or above an angle of 90° [Lm]: | 0 | ZVEI Code: | LED |
| Light Output Ratio (L.O.R.) [%]: | 50 | Number of optical assemblies: | 1 |


Polar

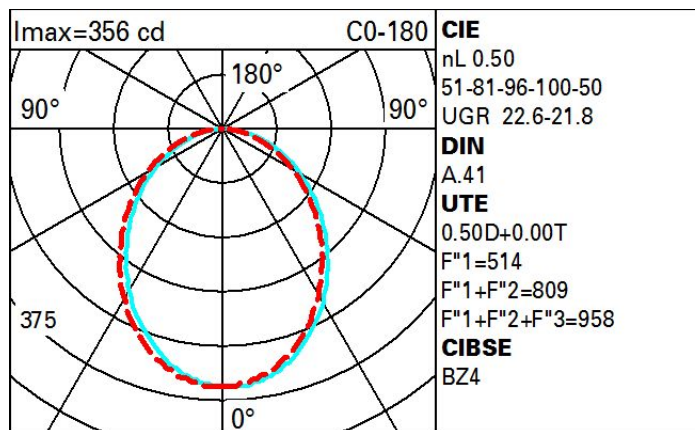

Utilisation factors

| R | 77 | 75 | 73 | 71 | 55 | 53 | 33 | 00 | DRR |
|------|----|----|----|----|----|----|----|----|-----|
| K0.8 | 34 | 29 | 25 | 22 | 28 | 25 | 24 | 21 | 42 |
| 1.0 | 37 | 32 | 29 | 26 | 32 | 28 | 28 | 25 | 49 |
| 1.5 | 42 | 38 | 35 | 33 | 37 | 35 | 34 | 31 | 62 |
| 2.0 | 45 | 42 | 39 | 37 | 41 | 39 | 38 | 35 | 70 |
| 2.5 | 47 | 44 | 42 | 40 | 43 | 41 | 41 | 38 | 76 |
| 3.0 | 48 | 46 | 44 | 42 | 45 | 43 | 42 | 40 | 79 |
| 4.0 | 50 | 48 | 46 | 45 | 47 | 45 | 45 | 42 | 84 |
| 5.0 | 51 | 49 | 48 | 47 | 48 | 47 | 46 | 44 | 87 |

Luminance curve limit

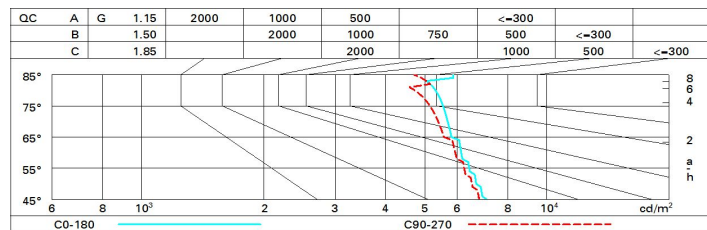

UGR diagram

| Corrected UGR values (at 1732 lm bare lamp luminous flux) | | | | | | | | | | | |
|--|------|---------------------|------|------|------|------|-------------------|------|------|------|------|
| Reflect.: ceiling walls work pl. Room dim x y | | 0.70 | 0.70 | 0.50 | 0.50 | 0.30 | 0.70 | 0.70 | 0.50 | 0.50 | 0.30 |
| | | 0.50 | 0.30 | 0.50 | 0.30 | 0.30 | 0.50 | 0.30 | 0.50 | 0.30 | 0.30 |
| | | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 |
| | | viewed crosswise | | | | | viewed endwise | | | | |
| 2H | 2H | 18.7 | 19.8 | 19.0 | 20.1 | 20.4 | 18.5 | 19.7 | 18.9 | 20.0 | 20.2 |
| | 3H | 20.2 | 21.2 | 20.5 | 21.5 | 21.8 | 19.0 | 20.1 | 19.4 | 20.4 | 20.7 |
| | 4H | 20.8 | 21.8 | 21.2 | 22.1 | 22.5 | 19.2 | 20.2 | 19.6 | 20.5 | 20.8 |
| | 6H | 21.4 | 22.3 | 21.8 | 22.6 | 23.0 | 19.3 | 20.2 | 19.7 | 20.5 | 20.9 |
| | 8H | 21.6 | 22.5 | 22.0 | 22.8 | 23.2 | 19.3 | 20.2 | 19.7 | 20.5 | 20.9 |
| | 12H | 21.8 | 22.6 | 22.2 | 23.0 | 23.3 | 19.3 | 20.1 | 19.7 | 20.5 | 20.9 |
| 4H | 2H | 19.3 | 20.3 | 19.6 | 20.6 | 20.9 | 20.5 | 21.5 | 20.8 | 21.8 | 22.1 |
| | 3H | 21.0 | 21.8 | 21.4 | 22.2 | 22.5 | 21.2 | 22.0 | 21.6 | 22.4 | 22.7 |
| | 4H | 21.7 | 22.5 | 22.1 | 22.9 | 23.3 | 21.5 | 22.2 | 21.9 | 22.6 | 23.0 |
| | 6H | 22.4 | 23.0 | 22.8 | 23.4 | 23.9 | 21.7 | 22.4 | 22.2 | 22.8 | 23.2 |
| | 8H | 22.6 | 23.2 | 23.1 | 23.7 | 24.1 | 21.8 | 22.4 | 22.2 | 22.8 | 23.3 |
| | 12H | 22.9 | 23.4 | 23.3 | 23.8 | 24.3 | 21.8 | 22.4 | 22.3 | 22.8 | 23.3 |
| 8H | 4H | 22.0 | 22.6 | 22.4 | 23.0 | 23.5 | 22.2 | 22.8 | 22.7 | 23.2 | 23.7 |
| | 6H | 22.8 | 23.3 | 23.3 | 23.7 | 24.2 | 22.6 | 23.1 | 23.1 | 23.6 | 24.0 |
| | 8H | 23.1 | 23.5 | 23.6 | 24.0 | 24.5 | 22.8 | 23.2 | 23.3 | 23.7 | 24.2 |
| | 12H | 23.4 | 23.8 | 23.9 | 24.3 | 24.8 | 22.9 | 23.3 | 23.4 | 23.8 | 24.3 |
| 12H | 4H | 22.0 | 22.6 | 22.5 | 23.0 | 23.5 | 22.3 | 22.9 | 22.8 | 23.3 | 23.8 |
| | 6H | 22.8 | 23.3 | 23.3 | 23.7 | 24.2 | 22.8 | 23.2 | 23.3 | 23.7 | 24.2 |
| | 8H | 23.2 | 23.6 | 23.7 | 24.1 | 24.6 | 23.0 | 23.4 | 23.5 | 23.8 | 24.4 |
| Variations with the observer position at spacing: | | | | | | | | | | | |
| S = | 1.0H | 0.1 / -0.1 | | | | | 0.1 / -0.1 | | | | |
| | 1.5H | 0.2 / -0.3 | | | | | 0.2 / -0.4 | | | | |
| | 2.0H | 0.5 / -0.6 | | | | | 0.4 / -0.7 | | | | |