

Blade R downlight



Design iGuzzini

iGuzzini

Last information update: November 2024

Product configuration: R220

R220: Minimal Ø 80 - Wide Flood beam - LED

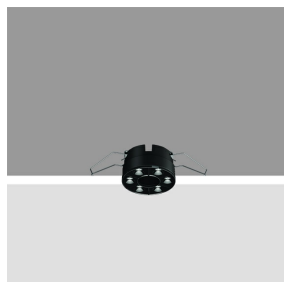

Product code

R220: Minimal Ø 80 - Wide Flood beam - LED

Technical description

Ring luminaire with 6 optical elements for LED lamps - fixed optics. The optic system guarantees a high level of visual comfort and no glare. The body includes a radiant surface made of die-cast aluminium. Minimal (frameless) version for flush with ceiling installation. For recessed installation in a false ceiling a specific adapter is required that is available with a separate item code. High definition reflectors made of thermoplastic material vacuum-metallised with aluminium vapours, integrated in a set-back position in the anti-glare screen. Supplied with a power supply unit connected to the luminaire.

Installation

Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - Ø 80 installation hole.

Colour

White (01) | Black (04) | Gold (14)* | Burnished chrome (E6)*

Weight (Kg)

0.18

* Colours on request

Mounting

ceiling recessed

Wiring

On the power supply unit with terminal board included. Available in on/off electronic versions.

Complies with EN60598-1 and pertinent regulations



Technical data

lm system:	1218	CRI (minimum):	80
W system:	12	Colour temperature [K]:	4000
lm source:	1450	MacAdam Step:	2
W source:	12	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	101.5	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	84	Number of optical assemblies:	1
Beam angle [°]:	58°	Control:	On/off


Polar

Imax=1575 cd		C15-195		CIE		Lux	
90°		180°		nL 0.84		h d1 d2 Em Emax	
1500		0°		100-100-100-100-84		1 1.1 1.1 1239 1560	
α=58°				UGR 13.9-14.0		2 2.2 2.2 310 390	
				DIN A 61		3 3.3 3.3 138 173	
				UTE 0.84A+0.00T		4 4.4 4.4 77 98	
				F*1=996			
				F*1+F*2=1000			
				F*1+F*2+F*3=1000			
				CIBSE LG3 L<1500 cd/m² at 65°			
				UGR<16 L<1500 cd/mq @65°			

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	76	72	69	67	71	69	68	66	78
1.0	79	76	73	71	75	73	72	69	83
1.5	83	80	78	77	79	78	77	74	89
2.0	86	84	82	81	83	81	80	78	93
2.5	87	86	85	84	85	83	83	80	96
3.0	88	87	86	86	86	85	84	82	98
4.0	89	88	88	87	87	87	85	83	99
5.0	90	89	89	89	88	88	86	84	100

Luminance curve limit

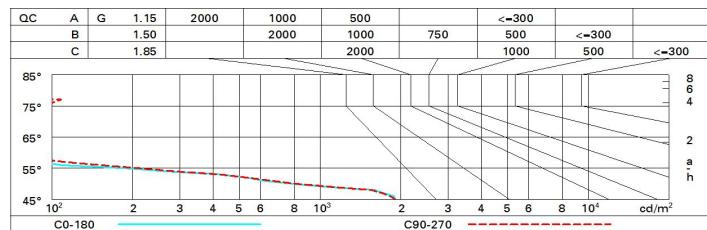

UGR diagram

Corrected UGR values (at 1450 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	14.5	15.1	14.7	15.3	15.5	14.6	15.1	14.8	15.4	15.6
	3H	14.3	14.9	14.6	15.1	15.4	14.4	15.0	14.7	15.2	15.5
	4H	14.3	14.8	14.6	15.0	15.3	14.3	14.8	14.7	15.1	15.4
	6H	14.2	14.6	14.5	15.0	15.3	14.3	14.7	14.6	15.0	15.4
	8H	14.1	14.6	14.5	14.9	15.2	14.2	14.7	14.6	15.0	15.3
	12H	14.1	14.5	14.5	14.9	15.2	14.2	14.6	14.6	15.0	15.3
4H	2H	14.3	14.8	14.6	15.0	15.3	14.3	14.8	14.7	15.1	15.4
	3H	14.1	14.5	14.5	14.9	15.2	14.2	14.6	14.6	15.0	15.3
	4H	14.0	14.4	14.4	14.8	15.1	14.1	14.5	14.5	14.8	15.2
	6H	13.9	14.3	14.4	14.7	15.1	14.0	14.3	14.4	14.7	15.2
	8H	13.9	14.2	14.3	14.6	15.0	14.0	14.3	14.4	14.7	15.1
	12H	13.8	14.1	14.3	14.5	15.0	13.9	14.2	14.4	14.6	15.1
8H	4H	13.9	14.2	14.3	14.6	15.0	14.0	14.3	14.4	14.7	15.1
	6H	13.8	14.0	14.3	14.5	15.0	13.9	14.1	14.3	14.6	15.0
	8H	13.7	13.9	14.2	14.4	14.9	13.8	14.0	14.3	14.5	15.0
	12H	13.7	13.9	14.2	14.3	14.9	13.8	14.0	14.3	14.4	15.0
12H	4H	13.8	14.1	14.3	14.5	15.0	13.9	14.2	14.4	14.6	15.1
	6H	13.7	13.9	14.2	14.4	14.9	13.8	14.0	14.3	14.5	15.0
	8H	13.7	13.9	14.2	14.3	14.9	13.8	14.0	14.3	14.4	15.0
Variations with the observer position at spacing:											
S =	1.0H	6.7 / -28.1					6.7 / -27.6				
	1.5H	9.5 / -30.7					9.5 / -30.1				
	2.0H	11.5 / -30.9					11.5 / -30.3				