

Deep Minimal



Design iGuzzini

iGuzzini

Last information update: April 2025

Product configuration: P938

P938: Deep Minimal - 1 element - CoB warm LED - wide flood beam - dimmable DALI



Product code

P938: Deep Minimal - 1 element - CoB warm LED - wide flood beam - dimmable DALI **Attention! Code no longer in production**

Technical description

Individual recessed luminaire for LED lamp. Minimal (frameless) version with no contact frame. Shaped stainless steel sheet structural frame specifically designed for flush with ceiling application using the adapter supplied. Die-cast aluminium, twin swivel universal joint located in a position set back from the installation surface to guarantee a high level of visual comfort. Tilts $\pm 30^\circ$ around both the horizontal and vertical axes. Die-cast aluminium lighting body designed to optimise heat dispersal. High efficiency aluminium reflector - wide flood angle. High color rendering index, warm white LED lamp. Glass cover Control gear unit included.

Installation

Recessed in 12.5 mm thick false ceilings. The aluminium adapter is designed for filling, smoothing and finishing the false ceiling before inserting the recessed unit. Steel wire fixing springs. Preparation hole 171 x 171.

Colour

White (01) | Black (04)

Mounting

ceiling recessed

Wiring

Complete with DALI dimmable control gear unit connected to the luminaire. Wiring for connecting to mains network on driver terminal board

Notes

Accessories available: refractor for elliptical flow distribution - interchangeable reflectors - adapter for installation in 15 mm thick false ceilings

Complies with EN60598-1 and pertinent regulations



IP20

IP23

On the visible part of the product once installed



Technical data

lm system:	2354	CRI:	90
W system:	32.2	Colour temperature [K]:	3000
lm source:	3100	MacAdam Step:	3
W source:	27	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	73.1	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	76	Number of optical assemblies:	1
Beam angle [°]:	48°	Control:	DALI


Polar

	CIE			
	nL 0.76			
	99-100-100-100-76			
	UGR 12.1-12.1			
	DIN A.61			
	UTE			
	0.76A+0.00T			
	F*1=988			
	F*1+F*2=998			
	F*1+F*2+F*3=1000			
	CIBSE			
	LG3 L<500 cd/m² at 65°			
	UGR<16 L<500 cd/mq @65°			
	Lux			
	h	d	Em	Emax
$\alpha = 48^\circ$				
	2	1.8	751	942
	4	3.6	188	236
	6	5.3	83	105
	8	7.1	47	59

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	68	65	62	60	64	62	61	59	78
1.0	71	68	66	64	67	65	65	62	82
1.5	75	72	71	69	72	70	69	67	88
2.0	77	75	74	73	74	73	72	70	93
2.5	79	77	76	75	76	75	74	72	95
3.0	80	79	78	77	77	77	76	74	97
4.0	81	80	79	79	79	78	77	75	99
5.0	81	81	80	80	79	79	78	76	100

Luminance curve limit

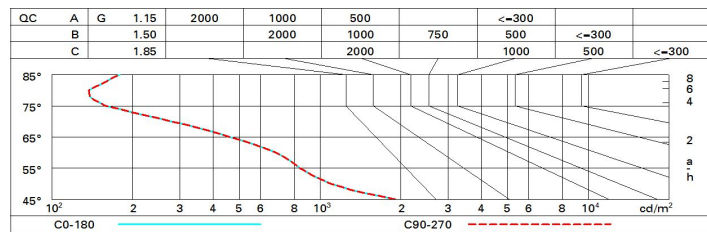

UGR diagram

Corrected UGR values (at 3100 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	12.7	13.2	13.0	13.5	13.7	12.7	13.2	13.0	13.5	13.7
	3H	12.6	13.1	12.9	13.3	13.6	12.6	13.1	12.9	13.3	13.6
	4H	12.5	13.0	12.8	13.2	13.5	12.5	12.9	12.8	13.2	13.5
	6H	12.4	12.8	12.8	13.1	13.5	12.4	12.8	12.7	13.1	13.5
	8H	12.4	12.8	12.7	13.1	13.4	12.4	12.8	12.7	13.1	13.4
	12H	12.3	12.7	12.7	13.1	13.4	12.3	12.7	12.7	13.1	13.4
4H	2H	12.5	12.9	12.8	13.2	13.5	12.5	13.0	12.8	13.2	13.5
	3H	12.3	12.7	12.7	13.1	13.4	12.3	12.7	12.7	13.1	13.4
	4H	12.2	12.6	12.6	13.0	13.3	12.2	12.6	12.6	13.0	13.3
	6H	12.2	12.5	12.6	12.9	13.3	12.2	12.5	12.6	12.9	13.3
	8H	12.1	12.4	12.6	12.8	13.2	12.1	12.4	12.6	12.8	13.2
	12H	12.1	12.3	12.5	12.8	13.2	12.1	12.3	12.5	12.7	13.2
8H	4H	12.1	12.4	12.6	12.8	13.2	12.1	12.4	12.6	12.8	13.2
	6H	12.0	12.3	12.5	12.7	13.2	12.0	12.3	12.5	12.7	13.2
	8H	12.0	12.2	12.5	12.6	13.1	12.0	12.2	12.5	12.6	13.1
	12H	11.9	12.1	12.4	12.6	13.1	11.9	12.1	12.4	12.6	13.1
12H	4H	12.1	12.3	12.5	12.7	13.2	12.1	12.3	12.5	12.8	13.2
	6H	12.0	12.2	12.5	12.6	13.1	12.0	12.2	12.5	12.6	13.1
	8H	11.9	12.1	12.4	12.6	13.1	11.9	12.1	12.4	12.6	13.1
Variations with the observer position at spacing:											
S =	1.0H	6.1 / -13.4					6.1 / -13.4				
	1.5H	8.9 / -14.8					8.9 / -14.8				
	2.0H	10.9 / -16.5					10.9 / -16.5				