


EC48: pole system



EC48: pole system

Weight (Kg)
9

wall arm|pole-top

Complies with EN60598-1 and pertinent regulations



Im system:	10380	Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)
W system:	83.4	Life Time LED 2:	100,000h - L90 - B10 (Ta 40°C)
Im source:	-	Voltage [Vin]:	230
W source:	-	Lamp code:	LED
Luminous efficiency (lm/W, real value):	124.5	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	100	Intervallo temperatura ambiente:	from -40°C to 50°C.
CRI (minimum):	70	Power factor:	See installation instructions
Colour temperature [K]:	3000	Overvoltage protection:	10kV Common mode & 6kV Differential mode
MacAdam Step:	3	Control:	DALI-2

Imax=6056 cd C20-200 $\gamma=62^\circ$

90° 180° 90°

9000


0°

CIE
LA^{0.5}=1248
SPREAD=narrow
THROW=intermediate
SLI=3.5

DIN
KB2

CEN
G*4
D4

Isolux

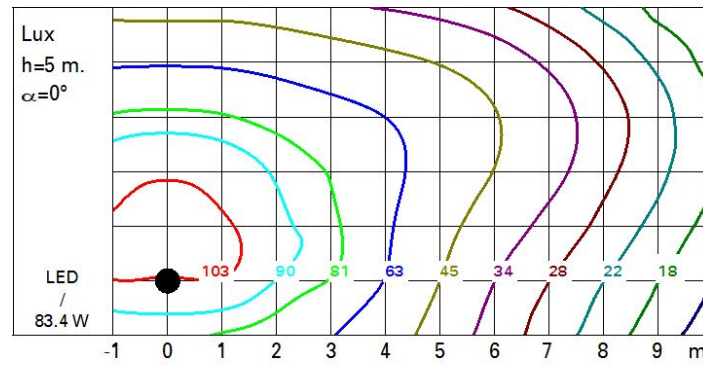

Utilisation factors

