


Last information update: May 2024

Product configuration: BH00

BH00: Wall-/Ceiling-mounted - 18 Neutral White LEDs - 100-277V ac - L=1585mm - Wall Grazing Optic

**Product code**BH00: Wall-/Ceiling-mounted - 18 Neutral White LEDs - 100-277V ac - L=1585mm - Wall Grazing Optic **Attention! Code no longer in production****Technical description**

Direct light luminaire, designed to use monochrome LED lamps. Ceiling- and wall-mounted. Consists of a body and supports for installation, to be ordered separately. Extruded aluminium body, with die-cast aluminium end caps complete with silicone seals. Coated with liquid acrylic paint with a high level of weather and UV ray resistance. Lateral power supply box made of PPS (polyphenylene sulfide). The top of the optical assembly is closed by a 3 mm thick transparent glass screen, fixed with silicone. Complete with multi-LED plate in Neutral White 4200K. Fitted with a PMMA diffusing filter and optic with plastic (methacrylate) lens for Wall Grazing lighting. The lateral box is supplied with a double connector, male/female, with 3-pin quick coupling for pass-through wiring and a closing cap on one side. All external screws used are made of A2 stainless steel. The luminaire technical characteristics conform to EN 60598-1 standards and particular requirements.

Installation

Accessories available for installation: $\pm 90^\circ$ adjustable arms L=138mm (code 5576), arms extendable from 309 to 389mm and adjustable $\pm 90^\circ$ (code 5577), bracket for wall-mounting L=350mm (code BZI0), brackets for mounting on balustrades L297mm (code 5578), bracket for surface- or ceiling-mounting L=350mm (code 5570)

Colour

Grey (15)

Weight (Kg)

4.49

Mounting

wall surface/ceiling surface

Wiring

The product is supplied with electronic control gear, 220÷240Vac, 50/60Hz contained in the luminaire. Available for electrical connection: IP66 3-pin female connector (BZI2), IP66 3-pin male connector + closing cap (BZI3), IP66 3-pin male connector + female connector (BZI4), multi-pole cable units with 3-pin male + female connectors (BZJ0-BZJ1-BZJ2)

Notes


Product complete with LED lamp.

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	1512	MacAdam Step:	3
W system:	22.8	Life Time LED 1:	100,000h - L80 - B10 (Ta 25°C)
Im source:	2700	Life Time LED 2:	100,000h - L80 - B10 (Ta 40°C)
W source:	18	Voltage [Vin]:	230
Luminous efficiency (Im/W, real value):	66.3	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	56	Number of optical assemblies:	1
CRI:	80	Intervallo temperatura ambiente:	from -30°C to 50°C.
Colour temperature [K]:	4000	Control:	On/off

Polar

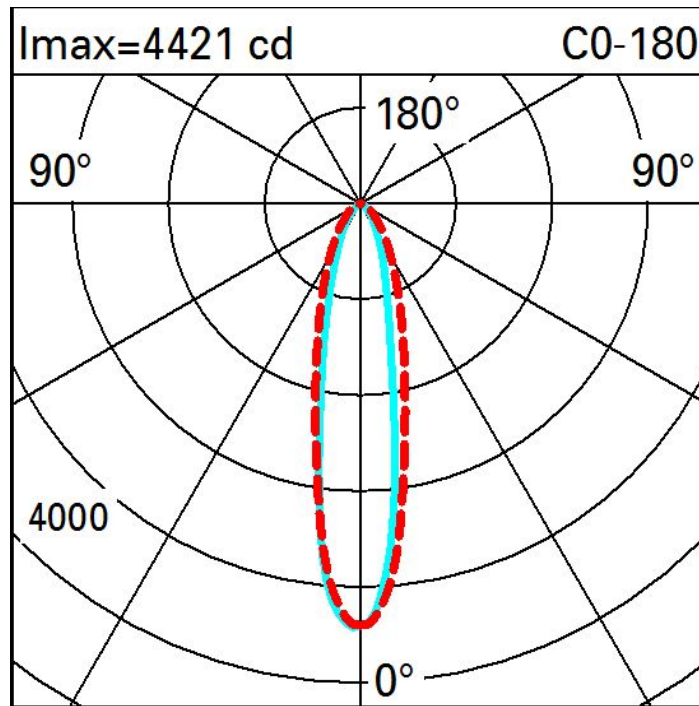

Illuminances

Lux													Wall distance = 1m	
3														
	0.4	1.0	3	6	14	19	14	6	3	1.0	0.4			
2	2	3	6	13	25	33	25	13	6	3	2			
	2	4	9	20	41	53	41	20	9	4	2			
1	3	5	10	22	38	48	38	22	10	5	3			
	3	6	12	21	32	41	32	21	12	6	3			
0														
	m	-2	-1	0	1	2	3							