


Last information update: May 2025

**Product configuration: RC02**

RC02: Neutral white medium body spotlight - Bluetooth - Flood optic

**Product code**

RC02: Neutral white medium body spotlight - Bluetooth - Flood optic

**Technical description**

Adjustable spotlight with adapter for installation on a mains voltage track. Luminaire made of die-cast aluminium. Spotlight double adjustability allows a 360° rotation about the vertical axis and 90° tilting relative to the horizontal plane. Mechanical aiming locks for rotation on both the vertical axis and horizontal plane. Optical assembly made up of Neutral White 4000 K, high colour rendering CRI 97, C.o.B LEDs. Luminaire with Bluetooth Low Energy technology (Casambi). Frequency 2.4 GHz. The luminaire can be controlled with the Casambi system app and components that enable on-off, dimming and scene recall functions. The app is available on the Apple Store and Google Play Store. It can be integrated in the system's "Mesh" network that allows multiple luminaires to be controlled. OTA (over the air) update via app. Integrated Beacon that can be activated via an app (iBeacon) that enables smart functions for third party applications.

**Installation**

Electrified track or base-mounted. Max luminaire-luminaire distance (\*): 8 m; max smartphone-luminaire distance (\*): 20 m.

**Colour**

White (01) | Black (04)

**Weight (Kg)**

2.1

**Mounting**

dali track|three circuit track|wall surface|ceiling surface

**Wiring**

Luminaire that can be controlled with Bluetooth technology (Casambi)


**Notes**

(\*) The maximum distance is affected by physical obstacles, like walls, metal panels and the layout of the system. We suggest that a test is conducted at the installation site.


Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	3081	Colour temperature [K]:	4000
W system:	39.2	MacAdam Step:	2
lm source:	3950	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	36	Lamp code:	LED
Luminous efficiency (lm/W, real value):	78.6	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	78	Power factor:	See installation instructions
Beam angle [°]:	30°	Control:	Casambi
CRI (minimum):	97		

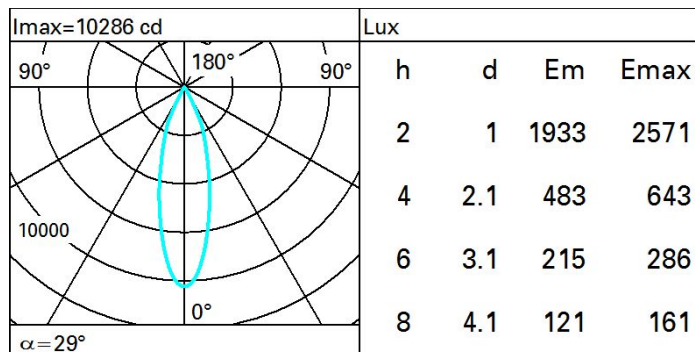**Polar**

### Isolux

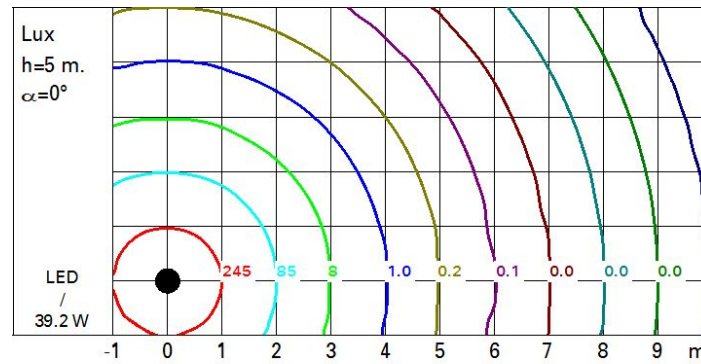

### UGR diagram

Corrected UGR values (at 3950 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	0.7	7.2	0.9	7.4	7.7	0.7	7.2	0.9	7.4	7.7
	3H	0.6	7.1	0.9	7.3	7.6	0.6	7.0	0.9	7.3	7.6
	4H	0.5	7.0	0.8	7.2	7.5	0.5	7.0	0.8	7.2	7.5
	6H	0.4	6.8	0.8	7.2	7.5	0.4	6.8	0.8	7.2	7.5
	8H	0.4	6.8	0.7	7.1	7.5	0.4	6.8	0.7	7.1	7.4
	12H	0.3	6.7	0.7	7.1	7.4	0.3	6.7	0.7	7.1	7.4
4H	2H	0.5	7.0	0.8	7.2	7.5	0.5	7.0	0.8	7.2	7.5
	3H	0.4	6.8	0.7	7.1	7.5	0.4	6.8	0.7	7.1	7.5
	4H	0.3	6.6	0.7	7.0	7.4	0.3	6.6	0.7	7.0	7.4
	6H	0.2	6.5	0.6	6.9	7.3	0.2	6.5	0.6	6.9	7.3
	8H	0.2	6.4	0.6	6.8	7.3	0.2	6.4	0.6	6.9	7.3
	12H	0.1	6.4	0.6	6.8	7.2	0.1	6.4	0.6	6.8	7.2
8H	4H	0.2	6.4	0.6	6.9	7.3	0.2	6.4	0.6	6.8	7.3
	6H	0.1	6.3	0.5	6.7	7.2	0.1	6.3	0.5	6.7	7.2
	8H	0.0	6.2	0.5	6.7	7.2	0.0	6.2	0.5	6.7	7.2
	12H	0.0	6.1	0.5	6.6	7.1	0.0	6.1	0.5	6.6	7.1
12H	4H	0.1	6.4	0.6	6.8	7.2	0.1	6.4	0.6	6.8	7.2
	6H	0.0	6.2	0.5	6.7	7.2	0.0	6.2	0.5	6.7	7.2
	8H	0.0	6.1	0.5	6.6	7.1	0.0	6.1	0.5	6.6	7.1
Variations with the observer position at spacing:											
S =		1.0H	5.8 / -9.5				5.8 / -9.5				
		1.5H	8.6 / -11.8				8.6 / -11.8				
		2.0H	10.6 / -13.0				10.6 / -13.0				