

Mini Reglette



Features




- Wall- or ceiling-mounted installation.
- Aluminium body, polycarbonate screen.
- Fast-coupling direct joints.
- Available electronic and DALI control gear.
- Luminaire reduced dimensions.



System grouping

Maximum number of products that can be connected with one single power supply (electronic versions) For the DALI versions consult the instructions sheet.

- 14 W T 16 - max 20 pieces
- 21 W T 16 - max 15 pieces
- 28 W T 16 - max 12 pieces
- 35 W T 16 - max 10 pieces
- 10 W LED - max 20 pieces
- 20 W LED - max 10 pieces

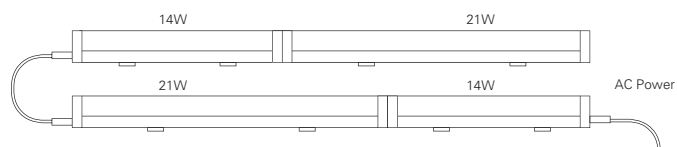

Max power 400W

Mini Reglette



01
WHITE



12
ALUMINIUM



light source	W	lm	length	code colour
LED	Complete with power supply			
	4000K - CRI 80			
	10W	800	598	5229 12
	20W	1600	1198	5231 12
	3000K - CRI 80			
	10W	720	598	5230 12
	20W	1440	1198	5232 12



T 16 (G5)	Electronic			
	3000K			
	14W		578	5203 01
	21W		878	5204 01
	28W		1178	5205 01
	35W		1478	5206 01
	4000K			
	14W		578	5207 01
	21W		878	5208 01
	28W		1178	5225 01
	35W		1478	5226 01

Complete with lamp and protection screen



light source	W	length	code colour
T 16 (G5)	DALI		
	3000K		
	14W	595	5278 01
	21W	895	5279 01
	28W	1195	5280 01
	35W	1495	5281 01
	4000K		
	14W	595	5282 01
	21W	895	5283 01
	28W	1195	5284 01
	35W	1495	5285 01

Complete with lamp and protection screen
Class of Insulation I

accessories

	code	colour
Power supply cable complete with plug L=1800	9693	01
	for electronic versions	
Power supply cable with 90° base complete with plug L=1800	9692	01
	for electronic versions	
Flexible connection cable		
L=150	9690	01
L=300	9694	01
L=1800	9691	01
	for electronic versions	

	code	colour
Power supply cable without plug L=1500	9724	01
	for DALI versions	
Flexible connection cable		
L=300	9725	01
L=600	9741	01
L=800	9742	01
L=1000	9743	01
	for DALI versions	