

Deep Frame



Design iGuzzini

iGuzzini

Last information update: April 2025

Product configuration: P922

P922: Deep Frame - 1 element - CoB warm LED - wide flood beam - dimmable DALI

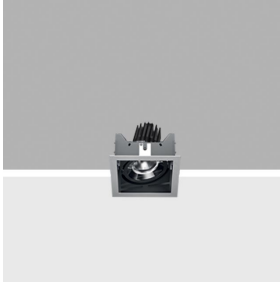

Product code

P922: Deep Frame - 1 element - CoB warm LED - wide flood beam - dimmable DALI **Attention! Code no longer in production**

Technical description

Individual recessed luminaire for LED lamp. Version with a perimeter frame. Shaped sheet steel structural frame. Die-cast aluminium, twin swivel universal joint located in a position set back from the installation surface to guarantee a high level of visual comfort. Tilts $\pm 30^\circ$ around both the horizontal and vertical axes. Die-cast aluminium lighting body designed to optimise heat dispersal. High efficiency aluminium reflector - wide flood angle. High color rendering index, warm white LED lamp. Glass cover Mechanical installation system. DALI dimmable control gear unit included.

Installation

Recessed in 1 to 30mm thick false ceilings - secured with manually adjustable metal brackets. Preparation hole 167 x 167.

Colour

White (01) | Grey / Black (74)

Weight (Kg)

1.5

Mounting

ceiling recessed

Wiring

Complete with DALI dimmable control gear unit connected to the luminaire. Wiring for connecting to mains network on driver terminal board

Notes

Accessories available: refractor for elliptical flow distribution - interchangeable reflector.

Complies with EN60598-1 and pertinent regulations



Technical data

| | | | |
|--|------|---------------------------------------|---------------------------------|
| lm system: | 2354 | CRI: | 90 |
| W system: | 32.2 | Colour temperature [K]: | 3000 |
| lm source: | 3100 | MacAdam Step: | 3 |
| W source: | 27 | Life Time LED 1: | > 50,000h - L80 - B10 (Ta 25°C) |
| Luminous efficiency (lm/W, real value): | 73.1 | Lamp code: | LED |
| lm in emergency mode: | - | Number of lamps for optical assembly: | 1 |
| Total light flux at or above an angle of 90° [Lm]: | 0 | ZVEI Code: | LED |
| Light Output Ratio (L.O.R.) [%]: | 76 | Number of optical assemblies: | 1 |
| Beam angle [°]: | 48° | Control: | DALI |


Polar

| Imax=3773 cd | | CIE | | Lux | | | |
|---------------------|------|-------------------------------|-----------------------------|-----|-----|-----|------|
| 90° | 180° | nL 0.76 | 99-100-100-100-76 | h | d | Em | Emax |
| | | UGR 11.8-11.8 | DIN A.61 | 2 | 1.8 | 751 | 942 |
| | | UTE 0.76A+0.00T | F*1=998 | 4 | 3.6 | 188 | 236 |
| | | F*1+F*2=998 | F*1+F*2+F*3=1000 | 6 | 5.3 | 83 | 105 |
| | | CIBSE LG3 L<1500 cd/m² at 65° | UGR<16 L<1500 cd/mq @ 65° | 8 | 7.1 | 47 | 59 |
| $\alpha = 48^\circ$ | | | | | | | |

Utilisation factors

| R | 77 | 75 | 73 | 71 | 55 | 53 | 33 | 00 | DRR |
|------|----|----|----|----|----|----|----|----|-----|
| K0.8 | 68 | 65 | 62 | 60 | 64 | 62 | 61 | 59 | 78 |
| 1.0 | 71 | 68 | 66 | 64 | 67 | 65 | 65 | 62 | 82 |
| 1.5 | 75 | 72 | 71 | 69 | 72 | 70 | 69 | 67 | 88 |
| 2.0 | 77 | 75 | 74 | 73 | 74 | 73 | 72 | 70 | 93 |
| 2.5 | 79 | 77 | 76 | 75 | 76 | 75 | 74 | 72 | 95 |
| 3.0 | 80 | 79 | 78 | 77 | 77 | 77 | 76 | 74 | 97 |
| 4.0 | 81 | 80 | 79 | 79 | 79 | 78 | 77 | 75 | 99 |
| 5.0 | 81 | 81 | 80 | 80 | 79 | 79 | 78 | 76 | 100 |

Luminance curve limit

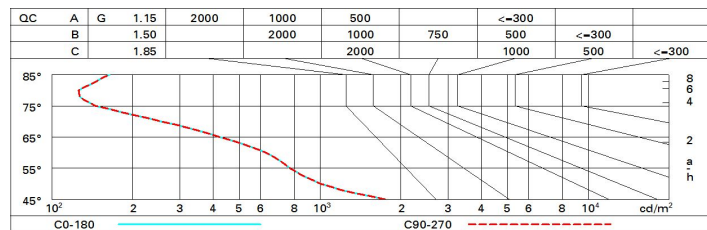

UGR diagram

| Corrected UGR values (at 3100 lm bare lamp luminous flux) | | | | | | | | | | | |
|--|------|---------------------|------|------|------|------|-------------------|------|------|------|------|
| Reflect.: ceiling/cav walls work pl. Room dim x y | | viewed crosswise | | | | | viewed endwise | | | | |
| | | 0.70 | 0.70 | 0.50 | 0.50 | 0.30 | 0.70 | 0.70 | 0.50 | 0.50 | 0.30 |
| | | 0.50 | 0.30 | 0.50 | 0.30 | 0.30 | 0.50 | 0.30 | 0.50 | 0.30 | 0.30 |
| | | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 |
| | | | | | | | | | | | |
| 2H | 2H | 12.4 | 12.9 | 12.7 | 13.2 | 13.4 | 12.4 | 12.9 | 12.7 | 13.2 | 13.4 |
| | 3H | 12.2 | 12.8 | 12.6 | 13.0 | 13.3 | 12.2 | 12.8 | 12.6 | 13.0 | 13.3 |
| | 4H | 12.2 | 12.6 | 12.5 | 12.9 | 13.2 | 12.2 | 12.6 | 12.5 | 12.9 | 13.2 |
| | 6H | 12.1 | 12.5 | 12.4 | 12.8 | 13.2 | 12.1 | 12.5 | 12.4 | 12.8 | 13.2 |
| | 8H | 12.1 | 12.5 | 12.4 | 12.8 | 13.1 | 12.1 | 12.5 | 12.4 | 12.8 | 13.1 |
| | 12H | 12.0 | 12.4 | 12.4 | 12.8 | 13.1 | 12.0 | 12.4 | 12.4 | 12.8 | 13.1 |
| | | | | | | | | | | | |
| 4H | 2H | 12.2 | 12.6 | 12.5 | 12.9 | 13.2 | 12.2 | 12.6 | 12.5 | 12.9 | 13.2 |
| | 3H | 12.0 | 12.4 | 12.4 | 12.8 | 13.1 | 12.0 | 12.4 | 12.4 | 12.8 | 13.1 |
| | 4H | 11.9 | 12.3 | 12.3 | 12.7 | 13.0 | 11.9 | 12.3 | 12.3 | 12.7 | 13.0 |
| | 6H | 11.9 | 12.2 | 12.3 | 12.6 | 13.0 | 11.9 | 12.2 | 12.3 | 12.6 | 13.0 |
| | 8H | 11.8 | 12.1 | 12.3 | 12.5 | 12.9 | 11.8 | 12.1 | 12.2 | 12.5 | 12.9 |
| | 12H | 11.8 | 12.0 | 12.2 | 12.4 | 12.9 | 11.8 | 12.0 | 12.2 | 12.4 | 12.9 |
| | | | | | | | | | | | |
| 8H | 4H | 11.8 | 12.1 | 12.2 | 12.5 | 12.9 | 11.8 | 12.1 | 12.3 | 12.5 | 12.9 |
| | 6H | 11.7 | 12.0 | 12.2 | 12.4 | 12.9 | 11.7 | 12.0 | 12.2 | 12.4 | 12.9 |
| | 8H | 11.7 | 11.9 | 12.1 | 12.3 | 12.8 | 11.7 | 11.9 | 12.1 | 12.3 | 12.8 |
| | 12H | 11.6 | 11.8 | 12.1 | 12.3 | 12.8 | 11.6 | 11.8 | 12.1 | 12.3 | 12.8 |
| | | | | | | | | | | | |
| 12H | 4H | 11.8 | 12.0 | 12.2 | 12.4 | 12.9 | 11.8 | 12.0 | 12.2 | 12.4 | 12.9 |
| | 6H | 11.7 | 11.9 | 12.1 | 12.3 | 12.8 | 11.7 | 11.9 | 12.1 | 12.3 | 12.8 |
| | 8H | 11.6 | 11.8 | 12.1 | 12.3 | 12.8 | 11.6 | 11.8 | 12.1 | 12.3 | 12.8 |
| | | | | | | | | | | | |
| Variations with the observer position at spacing: | | | | | | | | | | | |
| S = | 1.0H | 6.1 / -13.4 | | | | | 6.1 / -13.4 | | | | |
| | 1.5H | 8.9 / -14.8 | | | | | 8.9 / -14.8 | | | | |
| | 2.0H | 10.9 / -16.5 | | | | | 10.9 / -16.5 | | | | |