


Last information update: October 2023

Product configuration: BL29

BL29: Outdoor wall-mounted luminaire - warm white LED - with integrated electronic ballast Vin=120-277V ac - Wide Flood optic

**Product code**

BL29: Outdoor wall-mounted luminaire - warm white LED - with integrated electronic ballast Vin=120-277V ac - Wide Flood optic

Attention! Code no longer in production**Technical description**

Direct light outdoor ceiling-mounted luminaire, designed to use monochrome warm white LED lamps, with fixed Wide Flood optic. For wall-mounting with the special arm. Consists of an optical assembly, wall-mounting arm and glass-holding frame. The optical assembly, wall-mounting arm and frame are made of die-cast aluminium alloy coated with liquid acrylic paint with a high level of resistance to weather and UV rays. The 4 mm thick transparent, tempered sodium - calcium glass is joined to the frame with silicone. Two painted thermoplastic material outer guards complete the wall base. The internal silicone seals guarantee watertightness. The lower frame is fixed to the lamp body by a system using an unhookable hinge and captive closing screw. Body fixing to the wall-mounting arm is simplified using an unhookable hinge and a closing clip with captive safety screw. Steel retaining cables between the lower frame and the optical assembly, and between the optical assembly and the wall-mounting arm simplify installation operations. Complete with circuit having monochrome warm white LEDs and an optic with 99.93% polished super-pure aluminium reflector. Wide Flood (WF) emission. A number of accessories are available: refractor for elliptical distribution, prismatic diffusing glass and coloured filters. All external screws used are made of A2 stainless steel. The luminaire technical characteristics conform to EN60598-1 standards and particular requirements. Protection against being struck by a ball, in conformity with DIN/VDE 0710 part 13.

Installation

Wall-mounted with down-light emission. Secure using screw anchors for concrete, cement and solid brick.

Colour

Grey (15)

Weight (Kg)

6.46

Mounting

wall arm/wall surface

Wiring

Control gear complete with electronic ballast 120-277V ac 50/60Hz. Polyamide PG13.5 double cable gland for pass-through wiring, suitable for power cables \varnothing 8.5-12.5 mm. Three-pin terminal block set up for pass-through earth wire. Cables with quick-coupling terminals connect the terminal block and the control gear.

Notes

Product complete with LED lamp

Complies with EN60598-1 and pertinent regulations


**Technical data**

Im system:	3967	Colour temperature [K]:	3000
W system:	41.2	MacAdam Step:	2
Im source:	5150	Life Time LED 1:	91,000h - L80 - B10 (Ta 25°C)
W source:	34	Life Time LED 2:	59,000h - L80 - B10 (Ta 40°C)
Luminous efficiency (Im/W, real value):	96.3	Ballast losses [W]:	7.2
Im in emergency mode:	-	Lamp code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of lamps for optical assembly:	1
Light Output Ratio (L.O.R.) [%]:	77	ZVEI Code:	LED
Beam angle [°]:	50°	Number of optical assemblies:	1
CRI (minimum):	80	Intervallo temperatura ambiente:	from -20°C to +35°C.

Polar

Imax=5603 cd		Lux			
90°	180°	h	d	Em	Emax
		4	3.7	244	350
		8	7.5	61	88
		12	11.2	27	39
		16	14.9	15	22

Isolux

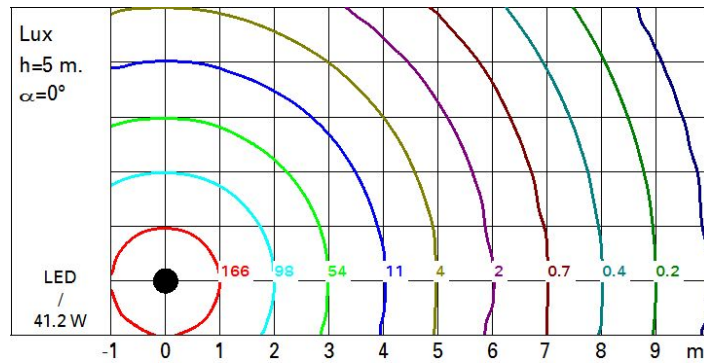

UGR diagram

Corrected UGR values (at 5150 lm bare lamp luminous flux)												
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise					
2H	2H	19.6	20.3	19.9	20.5	20.8	19.6	20.3	19.9	20.5	20.8	
	3H	19.5	20.1	19.8	20.4	20.7	19.5	20.1	19.8	20.4	20.7	
	4H	19.4	20.0	19.8	20.3	20.6	19.4	20.0	19.8	20.3	20.6	
	6H	19.3	19.9	19.7	20.2	20.5	19.3	19.9	19.7	20.2	20.5	
	8H	19.3	19.8	19.7	20.1	20.5	19.3	19.8	19.7	20.2	20.5	
	12H	19.3	19.8	19.6	20.1	20.4	19.3	19.8	19.7	20.1	20.5	
4H	2H	19.4	20.0	19.8	20.3	20.6	19.4	20.0	19.8	20.3	20.6	
	3H	19.3	19.8	19.7	20.2	20.5	19.3	19.8	19.7	20.1	20.5	
	4H	19.2	19.7	19.6	20.0	20.4	19.2	19.7	19.6	20.0	20.4	
	6H	19.2	19.5	19.6	19.9	20.4	19.2	19.5	19.6	19.9	20.4	
	8H	19.1	19.5	19.6	19.9	20.3	19.1	19.5	19.6	19.9	20.3	
	12H	19.1	19.4	19.5	19.8	20.3	19.1	19.4	19.5	19.8	20.3	
8H	4H	19.1	19.5	19.6	19.9	20.3	19.1	19.5	19.6	19.9	20.3	
	6H	19.0	19.3	19.5	19.8	20.2	19.0	19.3	19.5	19.8	20.2	
	8H	19.0	19.2	19.5	19.7	20.2	19.0	19.2	19.5	19.7	20.2	
	12H	18.9	19.1	19.4	19.6	20.2	18.9	19.1	19.4	19.6	20.2	
12H	4H	19.1	19.4	19.5	19.8	20.3	19.1	19.4	19.5	19.8	20.3	
	6H	19.0	19.2	19.5	19.7	20.2	19.0	19.2	19.5	19.7	20.2	
	8H	18.9	19.1	19.4	19.6	20.2	18.9	19.1	19.4	19.6	20.2	
Variations with the observer position at spacing:												
S =		1.0H	4.9 / -6.4				4.9 / -6.4					
		1.5H	7.6 / -9.2				7.6 / -9.2					
		2.0H	9.6 / -11.4				9.6 / -11.4					