


Last information update: October 2024

Product configuration: QG61

QG61: Medium body spotlight - neutral white - electronic ballast and dimmer - wide flood optic



Product code

QG61: Medium body spotlight - neutral white - electronic ballast and dimmer - wide flood optic

Technical description

Adjustable spotlight with adapter for installation on mains electrified track for high output LED lamp with monochrome emission in a Neutral White (4000K) tone. Dimmable electronic ballast integrated in the product. Luminaire made of die-cast aluminium and thermoplastic material, allows 360° rotation about the vertical axis and 90° tilting relative to the horizontal plane. The luminaire has mechanical aiming locks for both movements, operated using the same tool on two screws, one at the side of the rod and one on the adapter for the track. Passive heat dissipation. Spotlight can hold up to two flat accessories at the same time. Another external component can also be applied, selected from directional flaps and an anti-glare screen. All external accessories rotate 360° about the spotlight longitudinal axis.

Installation

On an electrified track

Colour

White (01) | Black (04)

Weight (Kg)

2.1

Mounting

three circuit track

Wiring

Electronic components housed in the luminaire


Complies with EN60598-1 and pertinent regulations



Technical data

| | | | |
|--|------|--|--|
| Im system: | 3118 | MacAdam Step: | 2 |
| W system: | 40.2 | Life Time LED 1: | > 50,000h - L90 - B10 (Ta 25°C) |
| Im source: | 3950 | Lamp code: | LED |
| W source: | 36 | Number of lamps for optical assembly: | 1 |
| Luminous efficiency (Im/W, real value): | 77.6 | ZVEI Code: | LED |
| Im in emergency mode: | - | Number of optical assemblies: | 1 |
| Total light flux at or above an angle of 90° [Lm]: | 0 | Power factor: | See installation instructions |
| Light Output Ratio (L.O.R.) [%]: | 79 | Inrush current: | 22 A / 260 µs |
| Beam angle [°]: | 42° | Maximum number of luminaires of this type per miniature circuit breaker: | B10A: 15 luminaires B16A: 24 luminaires C10A: 24 luminaires C16A: 40 luminaires |
| CRI (minimum): | 97 | Overvoltage protection: | 2kV Common mode & 1kV Differential mode |
| Colour temperature [K]: | 4000 | Control: | Completo di dimmer |


Polar

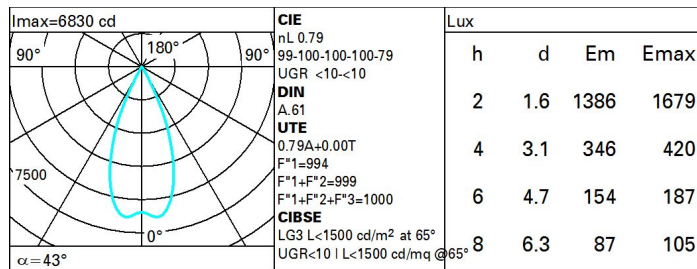

Utilisation factors

| | | | | | | | | | |
|------|----|----|----|----|----|----|----|----|-----|
| R | 77 | 75 | 73 | 71 | 55 | 53 | 33 | 00 | DRR |
| K0.8 | 71 | 67 | 65 | 63 | 67 | 65 | 64 | 62 | 78 |
| 1.0 | 74 | 71 | 69 | 67 | 70 | 68 | 68 | 65 | 83 |
| 1.5 | 78 | 75 | 74 | 72 | 75 | 73 | 72 | 70 | 88 |
| 2.0 | 80 | 79 | 77 | 76 | 78 | 76 | 75 | 73 | 93 |
| 2.5 | 82 | 81 | 79 | 79 | 79 | 78 | 78 | 75 | 96 |
| 3.0 | 83 | 82 | 81 | 80 | 81 | 80 | 79 | 77 | 98 |
| 4.0 | 84 | 83 | 83 | 82 | 82 | 81 | 80 | 78 | 99 |
| 5.0 | 84 | 84 | 83 | 83 | 83 | 82 | 81 | 79 | 100 |

Luminance curve limit

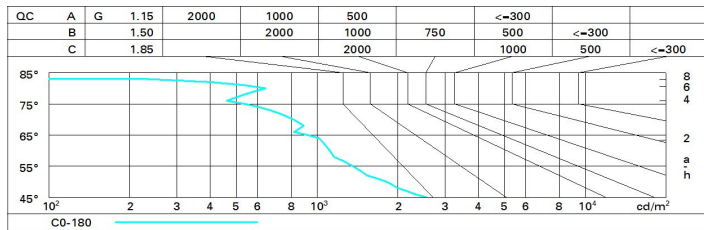

UGR diagram

| Corrected UGR values (at 3950 lm bare lamp luminous flux) | | | | | | | | | | | |
|---|------|------------------|------|------|------|------|----------------|------|------|------|------|
| Reflect.: | | viewed crosswise | | | | | viewed endwise | | | | |
| ceiling | cav | 0.70 | 0.70 | 0.50 | 0.50 | 0.30 | 0.70 | 0.70 | 0.50 | 0.50 | 0.30 |
| walls | | 0.50 | 0.30 | 0.50 | 0.30 | 0.30 | 0.50 | 0.30 | 0.50 | 0.30 | 0.30 |
| work pl. | | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 |
| Room dim | | | | | | | | | | | |
| x | y | | | | | | | | | | |
| 2H | 2H | 5.1 | 5.7 | 5.4 | 5.9 | 6.2 | 5.1 | 5.7 | 5.4 | 5.9 | 6.2 |
| | 3H | 5.1 | 5.6 | 5.4 | 5.9 | 6.2 | 5.1 | 5.6 | 5.4 | 5.8 | 6.1 |
| | 4H | 5.1 | 5.6 | 5.4 | 5.8 | 6.1 | 5.0 | 5.5 | 5.3 | 5.8 | 6.1 |
| | 6H | 5.0 | 5.5 | 5.4 | 5.8 | 6.1 | 4.9 | 5.4 | 5.3 | 5.7 | 6.0 |
| | 8H | 5.0 | 5.4 | 5.4 | 5.8 | 6.1 | 4.9 | 5.3 | 5.3 | 5.6 | 6.0 |
| | 12H | 5.0 | 5.4 | 5.4 | 5.7 | 6.1 | 4.9 | 5.3 | 5.2 | 5.6 | 6.0 |
| 4H | 2H | 5.0 | 5.5 | 5.3 | 5.8 | 6.1 | 5.1 | 5.6 | 5.4 | 5.8 | 6.1 |
| | 3H | 5.0 | 5.4 | 5.4 | 5.8 | 6.1 | 5.0 | 5.4 | 5.4 | 5.8 | 6.1 |
| | 4H | 5.0 | 5.3 | 5.4 | 5.7 | 6.1 | 5.0 | 5.3 | 5.4 | 5.7 | 6.1 |
| | 6H | 5.0 | 5.3 | 5.4 | 5.7 | 6.1 | 4.9 | 5.2 | 5.4 | 5.6 | 6.1 |
| | 8H | 4.9 | 5.2 | 5.4 | 5.6 | 6.1 | 4.9 | 5.2 | 5.3 | 5.6 | 6.0 |
| | 12H | 4.9 | 5.1 | 5.3 | 5.6 | 6.0 | 4.8 | 5.1 | 5.3 | 5.5 | 6.0 |
| 8H | 4H | 4.9 | 5.2 | 5.3 | 5.6 | 6.0 | 4.9 | 5.2 | 5.4 | 5.6 | 6.1 |
| | 6H | 4.9 | 5.1 | 5.4 | 5.6 | 6.0 | 4.9 | 5.1 | 5.4 | 5.6 | 6.0 |
| | 8H | 4.9 | 5.1 | 5.3 | 5.5 | 6.0 | 4.9 | 5.1 | 5.3 | 5.5 | 6.0 |
| | 12H | 4.8 | 5.0 | 5.3 | 5.5 | 6.0 | 4.8 | 5.0 | 5.3 | 5.5 | 6.0 |
| 12H | 4H | 4.8 | 5.1 | 5.3 | 5.5 | 6.0 | 4.9 | 5.1 | 5.3 | 5.6 | 6.0 |
| | 6H | 4.8 | 5.0 | 5.3 | 5.5 | 6.0 | 4.8 | 5.0 | 5.3 | 5.5 | 6.0 |
| | 8H | 4.8 | 5.0 | 5.3 | 5.5 | 6.0 | 4.8 | 5.0 | 5.3 | 5.5 | 6.0 |
| Variations with the observer position at spacing: | | | | | | | | | | | |
| S = | 1.0H | 5.6 / -5.4 | | | | | 5.6 / -5.4 | | | | |
| | 1.5H | 8.3 / -6.1 | | | | | 8.3 / -6.1 | | | | |
| | 2.0H | 10.2 / -6.8 | | | | | 10.2 / -6.8 | | | | |