


Last information update: May 2024

Product configuration: N006

N006: Fixed circular recessed luminaire - Ø153 mm - neutral white - medium optic - UGR<19

**Product code**N006: Fixed circular recessed luminaire - Ø153 mm - neutral white - medium optic - UGR<19 **Attention! Code no longer in production****Technical description**

Fixed round luminaire designed to use a LED lamp with C.O.B. technology. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Die-cast aluminium body and passive dissipation system. Product complete with LED lamp in neutral white colour tone (4,000K). General light emission, with controlled luminance UGR<19 1500 cd/m² α=65° medium optic.

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 25 mm.

Colour

White / Aluminium (39)

Weight (Kg)

1.22

Mounting

ceiling recessed

Wiring

product complete with an electronic ballast

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	2690	CRI (minimum):	80
W system:	23.7	Colour temperature [K]:	4000
lm source:	3100	MacAdam Step:	2
W source:	21	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	113.5	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	87	Number of optical assemblies:	1
Beam angle [°]:	24°		


Polar

Imax=10455 cd		CIE		Lux			
h	d	Em	Emax				
2	0.9	1991	2614				
4	1.7	498	653				
6	2.6	221	290				
8	3.4	124	163				

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	78	74	71	69	73	71	70	68	78
1.0	82	78	75	73	77	75	74	72	83
1.5	86	83	81	79	82	80	79	77	88
2.0	88	86	85	83	85	84	83	80	93
2.5	90	89	87	86	87	86	85	83	96
3.0	91	90	89	88	89	88	87	85	98
4.0	92	91	91	90	90	89	88	86	99
5.0	93	92	92	91	91	90	89	87	100

Luminance curve limit

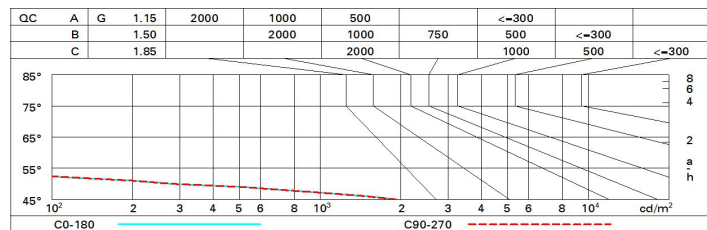

UGR diagram

Corrected UGR values (at 3100 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	16.4	18.2	16.8	18.5	18.8	16.4	18.2	16.8	18.5	18.8
	3H	16.3	17.6	16.7	17.9	18.2	16.3	17.6	16.7	17.9	18.2
	4H	16.2	17.4	16.6	17.7	18.0	16.2	17.4	16.6	17.7	18.0
	6H	16.1	17.2	16.5	17.6	17.9	16.1	17.2	16.5	17.6	17.9
	8H	16.1	17.2	16.5	17.5	17.9	16.1	17.2	16.5	17.5	17.9
	12H	16.0	17.1	16.4	17.5	17.8	16.0	17.1	16.4	17.5	17.8
4H	2H	16.2	17.4	16.6	17.7	18.0	16.2	17.4	16.6	17.7	18.0
	3H	16.0	17.1	16.4	17.5	17.8	16.0	17.1	16.4	17.5	17.8
	4H	15.9	16.9	16.4	17.3	17.7	15.9	16.9	16.4	17.3	17.7
	6H	15.7	17.0	16.2	17.4	17.9	15.7	17.0	16.2	17.4	17.9
	8H	15.6	17.0	16.0	17.5	18.0	15.6	17.0	16.0	17.5	18.0
	12H	15.4	17.1	15.9	17.5	18.1	15.4	17.1	15.9	17.5	18.1
8H	4H	15.6	17.0	16.0	17.5	18.0	15.6	17.0	16.0	17.5	18.0
	6H	15.4	16.9	15.9	17.4	17.9	15.4	16.9	15.9	17.4	17.9
	8H	15.4	16.7	15.9	17.2	17.7	15.4	16.7	15.9	17.2	17.7
	12H	15.5	16.4	16.0	16.9	17.5	15.5	16.4	16.0	16.9	17.5
12H	4H	15.4	17.1	15.9	17.5	18.1	15.4	17.1	15.9	17.5	18.1
	6H	15.4	16.7	15.9	17.2	17.7	15.4	16.7	15.9	17.2	17.7
	8H	15.5	16.4	16.0	16.9	17.5	15.5	16.4	16.0	16.9	17.5
Variations with the observer position at spacing:											
S =	1.0H	5.1 / -31.3					5.1 / -31.3				
	1.5H	7.9 / -31.6					7.9 / -31.6				
	2.0H	9.9 / -31.8					9.9 / -31.8				