


Last information update: May 2024

Product configuration: N064

N064: adjustable luminaire - Ø 75 mm - neutral white - flood optic - frame

**Product code**N064: adjustable luminaire - Ø 75 mm - neutral white - flood optic - frame **Attention! Code no longer in production****Technical description**

Round adjustable luminaire designed to use an LED lamp with C.O.B. technology in a neutral white colour tone 4000K. Version with rim for surface-mounting. Painted, die-cast aluminium body. Lower reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Anodised aluminium upper reflector. Black, zinc-plated sheet steel bracket. The luminaire can be rotated 30° relative to the horizontal plane and 358° about the vertical axis. The luminaire is fitted with mechanical locks for light beam aiming. Painted extruded aluminium dissipater.

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 25 mm.

Colour

White / Aluminium (39)

Weight (Kg)

0.45

Mounting

ceiling recessed

Wiring

Product complete with electronic components

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	240	CRI (minimum):	80
W system:	9	Colour temperature [K]:	4000
lm source:	1000	MacAdam Step:	2
W source:	6.2	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	26.6	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	24	Number of optical assemblies:	1
Beam angle [°]:	30° / 31°		


Polar

Imax=742 cd		C0-180		CIE		Lux	
90°	180°	90°	0°	nL 0.24		h	d1 d2 Em Emax
				99-100-100-100-24		1	0.5 0.6 556 742
				UGR <10-10		2	1.1 1.1 139 185
				DIN A.61		3	1.6 1.7 62 82
				UTE 0.24A+0.00T		4	2.1 2.2 35 46
				F*1=989			
				F*1+F*2=999			
				F*1+F*2+F*3=999			
				CIBSE LG3 L<1500 cd/m² at 65°			
				UGR<10 L<1500 cd/mq @65°			
				α = 30° / 31°			

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	22	20	20	19	20	19	19	19	78
1.0	23	22	21	20	21	21	20	20	82
1.5	24	23	22	22	23	22	22	21	88
2.0	24	24	23	23	24	23	23	22	93
2.5	25	24	24	24	24	24	24	23	95
3.0	25	25	25	24	24	24	24	23	97
4.0	25	25	25	25	25	25	24	24	99
5.0	26	25	25	25	25	25	25	24	100

Luminance curve limit

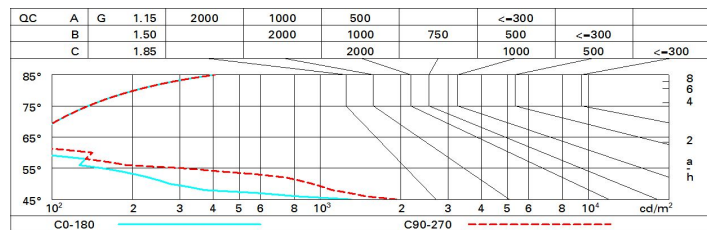

UGR diagram

Corrected UGR values (at 1000 lm bare lamp luminous flux)											
Riflect.: ceil/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	7.3	7.8	7.5	8.0	8.3	8.0	8.6	8.3	8.8	9.0
	3H	7.1	7.6	7.4	7.9	8.2	7.9	8.4	8.2	8.6	8.9
	4H	7.1	7.5	7.4	7.8	8.1	7.8	8.3	8.1	8.6	8.9
	6H	7.0	7.4	7.3	7.7	8.1	7.7	8.2	8.1	8.5	8.8
	8H	7.0	7.4	7.3	7.7	8.0	7.7	8.1	8.0	8.4	8.8
	12H	6.9	7.3	7.3	7.7	8.0	7.6	8.0	8.0	8.4	8.7
4H	2H	7.0	7.5	7.4	7.8	8.1	7.8	8.3	8.1	8.6	8.9
	3H	6.9	7.3	7.3	7.6	8.0	7.6	8.1	8.0	8.4	8.7
	4H	6.8	7.2	7.2	7.5	7.9	7.6	7.9	8.0	8.3	8.7
	6H	6.8	7.1	7.2	7.5	7.9	7.5	7.8	7.9	8.2	8.6
	8H	6.7	7.0	7.2	7.4	7.9	7.4	7.7	7.9	8.1	8.6
	12H	6.7	7.0	7.2	7.4	7.9	7.4	7.6	7.8	8.1	8.5
8H	4H	6.7	7.0	7.1	7.4	7.8	7.5	7.7	7.9	8.2	8.6
	6H	6.6	6.9	7.1	7.3	7.8	7.4	7.6	7.8	8.1	8.5
	8H	6.6	6.8	7.1	7.3	7.8	7.3	7.5	7.8	8.0	8.5
	12H	6.6	6.8	7.1	7.3	7.8	7.3	7.5	7.8	8.0	8.5
12H	4H	6.6	6.9	7.1	7.3	7.8	7.4	7.7	7.9	8.1	8.6
	6H	6.6	6.8	7.1	7.3	7.8	7.4	7.6	7.8	8.0	8.5
	8H	6.6	6.7	7.1	7.2	7.7	7.3	7.5	7.8	8.0	8.5
Variations with the observer position at spacing:											
S =	1.0H	5.3 / -10.2					4.8 / -10.3				
	1.5H	8.1 / -10.5					7.6 / -11.2				
	2.0H	10.1 / -10.7					9.6 / -11.4				