

Coefficienti di utilizzazione

R	77	75	73	71	55	53	33	00	DRR
K0.8	71	68	65	63	67	65	64	62	78
1.0	75	71	69	67	70	68	68	66	83
1.5	78	76	74	72	75	73	72	70	89
2.0	81	79	77	76	78	76	76	73	93
2.5	82	81	80	79	80	79	78	76	96
3.0	83	82	81	81	81	80	79	77	98
4.0	84	83	83	82	82	82	80	79	99
5.0	84	84	84	83	83	82	81	79	100

Curva limite di luminanza

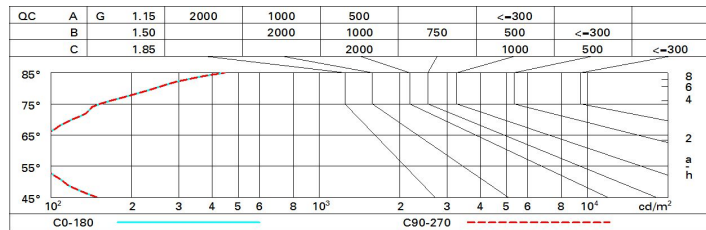


Diagramma UGR

Corrected UGR values (at 1850 lm bare lamp luminous flux)											
Reflect.:											
ceil/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y			viewed crosswise				viewed endwise			
2H	2H	3.0	5.1	3.4	5.5	5.8	3.0	5.1	3.4	5.5	5.8
	3H	2.9	4.5	3.2	4.8	5.1	2.9	4.5	3.2	4.8	5.1
	4H	2.8	4.1	3.2	4.5	4.8	2.8	4.1	3.2	4.5	4.8
	6H	2.8	3.8	3.2	4.1	4.5	2.8	3.8	3.1	4.1	4.5
	8H	2.7	3.8	3.1	4.1	4.5	2.7	3.7	3.1	4.1	4.5
	12H	2.7	3.7	3.1	4.1	4.5	2.7	3.7	3.1	4.0	4.4
4H	2H	2.8	4.1	3.2	4.5	4.8	2.8	4.1	3.2	4.5	4.8
	3H	2.7	3.7	3.1	4.1	4.4	2.7	3.7	3.1	4.1	4.4
	4H	2.5	3.6	3.0	4.0	4.4	2.5	3.6	3.0	4.0	4.4
	6H	2.2	3.9	2.7	4.3	4.8	2.2	3.9	2.7	4.3	4.8
	8H	2.1	4.0	2.6	4.4	4.9	2.1	4.0	2.6	4.4	4.9
	12H	2.0	4.0	2.5	4.4	5.0	2.0	3.9	2.5	4.4	4.9
8H	4H	2.1	4.0	2.6	4.4	4.9	2.1	4.0	2.6	4.4	4.9
	6H	2.0	3.8	2.5	4.2	4.8	2.0	3.8	2.5	4.3	4.8
	8H	2.0	3.6	2.5	4.1	4.6	2.0	3.6	2.5	4.1	4.6
	12H	2.2	3.2	2.7	3.7	4.2	2.1	3.1	2.7	3.6	4.2
12H	4H	2.0	3.9	2.5	4.4	4.9	2.0	4.0	2.5	4.4	5.0
	6H	2.0	3.5	2.5	4.0	4.6	2.0	3.6	2.5	4.1	4.6
	8H	2.1	3.1	2.7	3.6	4.2	2.2	3.2	2.7	3.7	4.2
Variations with the observer position at spacing:											
S =	1.0H		6.9	/ -11.5					6.9	/ -11.5	
	1.5H		9.7	/ -11.7					9.7	/ -11.7	
	2.0H		11.7	/ -11.8					11.7	/ -11.8	