

Blade R downlight



Design iGuzzini

iGuzzini

Last information update: January 2025

Product configuration: QS24

QS24: Frame Ø 80 - Medium beam - LED

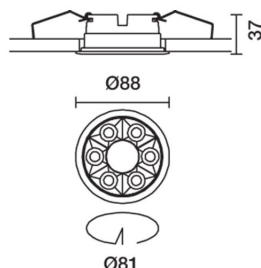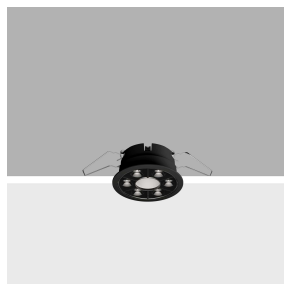

Product code

QS24: Frame Ø 80 - Medium beam - LED

Technical description

Ring luminaire with 6 optical elements for LED lamps - fixed optics. The optic system guarantees a high level of visual comfort and no glare. The body includes a radiant surface made of die-cast aluminium. Version includes a perimeter surface frame. High definition reflectors made of thermoplastic material vacuum-metallised with aluminium vapours, integrated in a set-back position in the anti-glare screen. Supplied with a power supply unit connected to the luminaire. Central cover available with separate item code.

Installation

Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - Ø 80 installation hole.

Colour

White (01) | Black / Black (43) | Black / White (47) | White/Gold (41)* | White / burnished chrome (E7)*

Weight (Kg)

0.3

* Colours on request

Mounting

ceiling recessed


Wiring

On the power supply unit with terminal board included. Available in DALI versions.

Notes

Central cover to complete the luminaire to be ordered with a separate item code - available in a standard finish, it is designed to be painted with a customised finish.

Complies with EN60598-1 and pertinent regulations

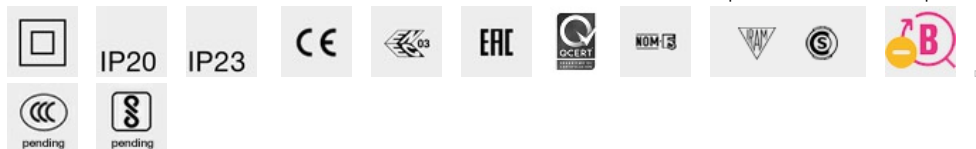

Technical data

lm system:	840	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W system:	14.5	Voltage [Vin]:	230
lm source:	1050	Lamp code:	LED
W source:	12	Number of lamps for optical assembly:	1
Luminous efficiency (lm/W, real value):	57.9	ZVEI Code:	LED
lm in emergency mode:	-	Number of optical assemblies:	1
Total light flux at or above an angle of 90° [Lm]:	0	Power factor:	See installation instructions
Light Output Ratio (L.O.R.) [%]:	80	Inrush current:	5 A / 220 µs
Beam angle [°]:	24°	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 81 luminaires B16A: 130 luminaires C10A: 135 luminaires C16A: 221 luminaires
CRI (minimum):	90	Minimum dimming %:	1
Colour temperature [K]:	2700	Control:	DALI-2
MacAdam Step:	2		


Polar

Imax=4016 cd		C0-180		CIE		Lux				
90°	180°	90°		nL 0.80	h	d1	d2	Em	Emax	
				100-100-100-100-80	2	0.9	0.9	799	1004	
				UGR <10<10	4	1.7	1.7	200	251	
				DIN	6	2.6	2.6	89	112	
				A.61	8	3.4	3.4	50	63	
				UTE						
				0.80A+0.00T						
				F*1=999						
				F*1+F*2=1000						
				F*1+F*2+F*3=1000						
				CIBSE						
				LG3 L<1500 cd/m² at 65°						
				UGR<10 L<1500 cd/mq @65°						
α=24°										

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	69	66	64	68	66	65	63	78
1.0	75	72	70	68	71	69	69	66	83
1.5	79	77	75	73	76	74	73	71	89
2.0	82	80	78	77	79	77	77	74	93
2.5	83	82	81	80	81	80	79	77	96
3.0	84	83	82	82	82	81	80	78	98
4.0	85	84	84	83	83	83	81	79	99
5.0	86	85	85	84	84	83	82	80	100

Luminance curve limit

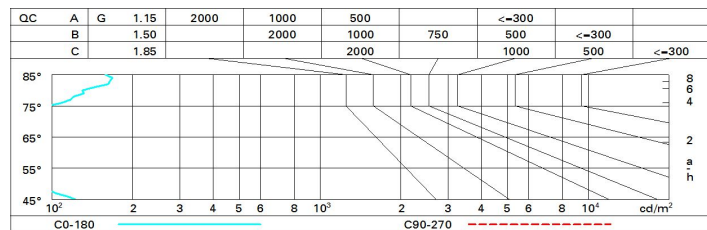

UGR diagram

Corrected UGR values (at 1050 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70 0.50 0.20	0.70 0.30 0.20	0.50 0.50 0.20	0.50 0.30 0.20	0.30 0.30 0.20	0.70 0.50 0.20	0.70 0.30 0.20	0.50 0.50 0.20	0.50 0.30 0.20	0.30 0.30 0.20
viewed crosswise						viewed endwise					
2H	2H	2.5	4.6	2.9	4.9	5.2	3.7	5.8	4.1	6.2	6.5
	3H	2.3	3.9	2.7	4.3	4.6	3.6	5.2	4.0	5.5	5.8
	4H	2.3	3.6	2.7	3.9	4.3	3.5	4.9	3.9	5.2	5.5
	6H	2.2	3.3	2.6	3.6	4.0	3.5	4.5	3.9	4.9	5.2
	8H	2.2	3.2	2.6	3.6	4.0	3.4	4.5	3.8	4.8	5.2
	12H	2.2	3.2	2.6	3.6	3.9	3.4	4.4	3.8	4.8	5.2
4H	2H	2.3	3.6	2.7	3.9	4.3	3.5	4.9	3.9	5.2	5.5
	3H	2.1	3.2	2.5	3.5	3.9	3.4	4.4	3.8	4.8	5.2
	4H	2.0	3.0	2.4	3.4	3.8	3.3	4.3	3.7	4.7	5.1
	6H	1.7	3.4	2.2	3.8	4.3	2.9	4.6	3.4	5.0	5.5
	8H	1.6	3.4	2.1	3.9	4.4	2.8	4.6	3.3	5.1	5.6
	12H	1.5	3.4	2.0	3.9	4.4	2.7	4.6	3.2	5.1	5.6
8H	4H	1.5	3.4	2.0	3.9	4.4	2.8	4.6	3.3	5.1	5.6
	6H	1.4	3.2	1.9	3.7	4.2	2.7	4.4	3.2	4.9	5.5
	8H	1.4	3.0	2.0	3.5	4.0	2.7	4.2	3.2	4.7	5.2
	12H	1.6	2.6	2.1	3.1	3.6	2.8	3.8	3.3	4.3	4.8
12H	4H	1.4	3.4	1.9	3.9	4.4	2.7	4.6	3.2	5.1	5.6
	6H	1.4	3.0	1.9	3.5	4.0	2.7	4.2	3.2	4.7	5.2
	8H	1.6	2.6	2.1	3.1	3.6	2.8	3.8	3.3	4.3	4.8
Variations with the observer position at spacing:											
S =	1.0H	6.6 / -12.8					6.7 / -17.1				
	1.5H	9.4 / -13.0					9.5 / -17.3				
	2.0H	11.4 / -13.0					11.5 / -17.5				