

Reflex

Reflex frame version
Chip on Board
(C.o.B.) minimal version
page 74



Fixed
optic



ø 242



ø 212



ø 153



ø 125



ø 96



ø 75



Adjustable
optic



ø 212



ø 153



ø 125



ø 96



ø 75



Wall Washer
optic



ø 212




ø 153



ø 125



ø 96



ø 75

Reflex round version
LED Light Engine
(L.L.E.) page 86



Fixed
optic



ø 212



ø 125



Wall Washer
optic



ø 212



ø 125

Reflex square version
LED Light Engine (L.L.E.)
page 86



Fixed
optic



ø 212



ø 125

Reflex frame version
minimal version
page 92



Fixed
optic



ø 242



ø 212



ø 153



ø 125



ø 96



Adjustable
optic



ø 153



ø 125



ø 96



ø 75



Wall Washer
optic



ø 242



ø 212



ø 153



ø 125

Reflex wall washer LED Light Engine (L.L.E.)



Features



- Recessed installation in false ceilings with 1 to 25 mm using torsion springs.
- Die-cast aluminium body and heat sink.
- Metallised aluminium reflector with anti-scratch protection treatment.
- Available with electronic and DALI control gear.
- IP20
- IP43 for visible body of fitting after installation.




Reflector retention system



Springs with lock/unlock system

Optics and lamps



LED L.L.E.	8,5 - 16 - 18 - 19W
	21 - 23 - 29 - 31W
	32 - 45 - 48W

Downlight Wall Washer iGuzzini:
uniform wall lighting

LED

Energy saving


- **LED L.L.E.**
- Colour stability
Mac Adam <3
- Life
50000 h **L80**
- Color temperature:
Neutral white **4000K**
Warm white **3000K**

lumen lm	LED	QR CBC 51 		TC-TEL 		HIT-TC-CE 	
1100	8,5W	50W	83%	18W	53%	-	-
2000	21W	2x50W	79%	26W	19%	-	-
3000	32W	3x50W	79%	42W	24%	35W	9%


(3000K) LED energy saving compared with conventional lamps

Correct installation

Please refer to the instructions sheet for the best layout of the fixtures in order to guarantee uniform wall lighting.

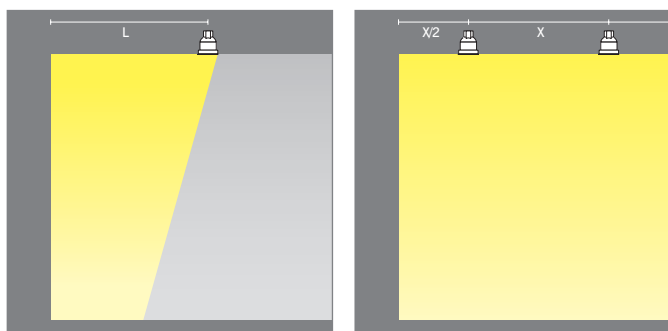

ø 125



light source W* lm code colour

LED

Frame installation

Complete with power supply

Neutral white

8,5W 1200 **MB47** 39

16W 2000 **MU21** 39

Warm white

8,5W 1100 **MB48** 39

18W 2000 **MU22** 39

Neutral white DALI

8,5W 1200 **MB49** 39

16W 2000 **MU23** 39

Warm white DALI

8,5W 1100 **MB50** 39


18W 2000 **MU24** 39

Warm white DALI - CRI 90

23W 2000 **MU25** 39

DALI versions occupy 1 address

ø 212



light source W* lm code colour

LED

Frame installation

Complete with power supply

Neutral white

19W 2000 **MB92** 39

29W 3000 **MB94** 39

45W 5000 **MN01** 39

Warm white

21W 2000 **MB93** 39

32W 3000 **MB95** 39

48W 5000 **MN02** 39

Neutral white DALI

19W 2000 **MB96** 39

29W 3000 **MB98** 39

45W 5000 **MN03** 39

Warm white DALI

21W 2000 **MB97** 39

32W 3000 **MB99** 39

48W 5000 **MN04** 39

Warm white DALI - CRI 90

21W 2000 **MC43** 39

31W 3000 **MC44** 39

DALI versions occupy 1 address

accessories



125



212



Customisation rim

code colour
MWP4 15

code colour
MWP5 15



Reinforcement plate
for false ceilings

code colour
--- ---

code colour
6024 00



Casing for
concrete ceilings

code colour
--- ---

code colour
6030 00