

Blade R downlight


Design iGuzzini

iGuzzini

Last information update: November 2024

Product configuration: R234

R234: Frame Ø 125 - Wide Flood beam - LED



Product code

R234: Frame Ø 125 - Wide Flood beam - LED

Technical description

Ring luminaire with 12 optical elements for LED lamps - fixed optics. The optic system guarantees a high level of visual comfort and no glare. The body includes a radiant surface made of die-cast aluminium. Version includes a perimeter surface frame. High definition reflectors made of thermoplastic material vacuum-metallised with aluminium vapours, integrated in a set-back position in the anti-glare screen. Supplied with a power supply unit connected to the luminaire.

Installation

Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - Ø 125 installation hole.

Colour

White (01) | Black / Black (43) | Black / White (47) | White/Gold (41)* | White / burnished chrome (E7)*

Weight (Kg)

0.34

* Colours on request


Mounting

ceiling recessed

Wiring

On the power supply unit with terminal board included. Available in DALI versions.

Complies with EN60598-1 and pertinent regulations



Technical data

| | | | |
|--|------|---------------------------------------|---------------------------------|
| lm system: | 2253 | CRI (minimum): | 90 |
| W system: | 24 | Colour temperature [K]: | 4000 |
| lm source: | 2650 | MacAdam Step: | 2 |
| W source: | 24 | Life Time LED 1: | > 50,000h - L80 - B10 (Ta 25°C) |
| Luminous efficiency (lm/W, real value): | 93.9 | Lamp code: | LED |
| lm in emergency mode: | - | Number of lamps for optical assembly: | 1 |
| Total light flux at or above an angle of 90° [Lm]: | 0 | ZVEI Code: | LED |
| Light Output Ratio (L.O.R.) [%]: | 85 | Number of optical assemblies: | 1 |
| Beam angle [°]: | 58° | Control: | DALI-2 |


Polar

| | | | | | | | |
|--------------|--|---------|--|----------------------------|--|------|--|
| Imax=3196 cd | | C80-260 | | CIE | | Lux | |
| 90° | | 180° | | nL 0.85 | | h | |
| | | | | 100-100-100-100-85 | | d1 | |
| | | | | UGR 12.3-12.4 | | d2 | |
| | | | | DIN | | Em | |
| | | | | A.61 | | Emax | |
| | | | | UTE | | | |
| | | | | 0.85A+0.00T | | | |
| | | | | F*1=997 | | | |
| | | | | F*1+F*2=1000 | | | |
| | | | | F*1+F*2+F*3=1000 | | | |
| | | | | CIBSE | | | |
| | | | | LG3 L<1500 cd/m² at 65° | | | |
| | | | | UGR<16 L<1500 cd/mq @65° | | | |
| α=58° | | | | | | | |

Utilisation factors

| R | 77 | 75 | 73 | 71 | 55 | 53 | 33 | 00 | DRR |
|------|----|----|----|----|----|----|----|----|-----|
| K0.8 | 77 | 73 | 70 | 68 | 72 | 70 | 69 | 67 | 78 |
| 1.0 | 80 | 77 | 74 | 72 | 76 | 73 | 73 | 70 | 83 |
| 1.5 | 84 | 81 | 79 | 78 | 80 | 79 | 78 | 75 | 89 |
| 2.0 | 87 | 85 | 83 | 82 | 84 | 82 | 81 | 79 | 93 |
| 2.5 | 88 | 87 | 86 | 85 | 86 | 85 | 84 | 81 | 96 |
| 3.0 | 89 | 88 | 87 | 87 | 87 | 86 | 85 | 83 | 98 |
| 4.0 | 90 | 90 | 89 | 89 | 88 | 88 | 86 | 84 | 99 |
| 5.0 | 91 | 90 | 90 | 90 | 89 | 89 | 87 | 85 | 100 |

Luminance curve limit

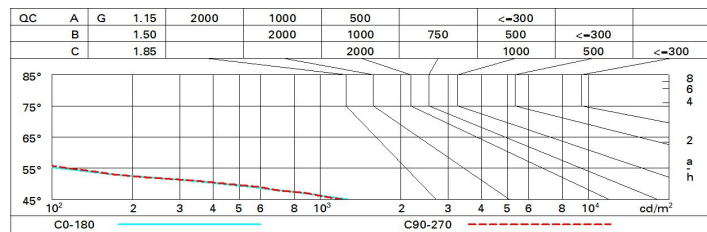

UGR diagram

| Corrected UGR values (at 2050 lm bare lamp luminous flux) | | | | | | | | | | | |
|--|------|---------------------|------|------|------|------|-------------------|------|------|------|------|
| Reflect.: ceiling/cav walls work pl. Room dim x y | | viewed crosswise | | | | | viewed endwise | | | | |
| | | 0.70 | 0.70 | 0.50 | 0.50 | 0.30 | 0.70 | 0.70 | 0.50 | 0.50 | 0.30 |
| | | 0.50 | 0.30 | 0.50 | 0.30 | 0.30 | 0.50 | 0.30 | 0.50 | 0.30 | 0.30 |
| | | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 |
| | | | | | | | | | | | |
| 2H | 2H | 12.8 | 13.4 | 13.1 | 13.7 | 13.9 | 13.0 | 13.6 | 13.3 | 13.8 | 14.1 |
| | 3H | 12.7 | 13.2 | 13.0 | 13.5 | 13.8 | 12.9 | 13.4 | 13.2 | 13.7 | 13.9 |
| | 4H | 12.6 | 13.1 | 13.0 | 13.4 | 13.7 | 12.8 | 13.3 | 13.1 | 13.6 | 13.9 |
| | 6H | 12.6 | 13.0 | 12.9 | 13.3 | 13.6 | 12.7 | 13.2 | 13.1 | 13.5 | 13.8 |
| | 8H | 12.5 | 13.0 | 12.9 | 13.3 | 13.6 | 12.7 | 13.1 | 13.0 | 13.4 | 13.8 |
| | 12H | 12.5 | 12.9 | 12.9 | 13.2 | 13.6 | 12.6 | 13.1 | 13.0 | 13.4 | 13.7 |
| | | | | | | | | | | | |
| 4H | 2H | 12.6 | 13.1 | 13.0 | 13.4 | 13.7 | 12.8 | 13.3 | 13.1 | 13.6 | 13.9 |
| | 3H | 12.5 | 12.9 | 12.9 | 13.2 | 13.6 | 12.6 | 13.1 | 13.0 | 13.4 | 13.7 |
| | 4H | 12.4 | 12.8 | 12.8 | 13.1 | 13.5 | 12.6 | 12.9 | 13.0 | 13.3 | 13.7 |
| | 6H | 12.3 | 12.6 | 12.7 | 13.0 | 13.4 | 12.5 | 12.8 | 12.9 | 13.2 | 13.6 |
| | 8H | 12.3 | 12.5 | 12.7 | 13.0 | 13.4 | 12.4 | 12.7 | 12.9 | 13.1 | 13.6 |
| | 12H | 12.2 | 12.5 | 12.7 | 12.9 | 13.4 | 12.4 | 12.6 | 12.8 | 13.1 | 13.5 |
| | | | | | | | | | | | |
| 8H | 4H | 12.3 | 12.5 | 12.7 | 13.0 | 13.4 | 12.4 | 12.7 | 12.9 | 13.1 | 13.6 |
| | 6H | 12.2 | 12.4 | 12.6 | 12.8 | 13.3 | 12.3 | 12.6 | 12.8 | 13.0 | 13.5 |
| | 8H | 12.1 | 12.3 | 12.6 | 12.8 | 13.3 | 12.3 | 12.5 | 12.8 | 12.9 | 13.4 |
| | 12H | 12.1 | 12.2 | 12.6 | 12.7 | 13.2 | 12.2 | 12.4 | 12.7 | 12.9 | 13.4 |
| | | | | | | | | | | | |
| 12H | 4H | 12.2 | 12.5 | 12.7 | 12.9 | 13.4 | 12.4 | 12.6 | 12.8 | 13.1 | 13.5 |
| | 6H | 12.1 | 12.3 | 12.6 | 12.8 | 13.3 | 12.3 | 12.5 | 12.8 | 12.9 | 13.4 |
| | 8H | 12.1 | 12.2 | 12.6 | 12.7 | 13.2 | 12.2 | 12.4 | 12.7 | 12.9 | 13.4 |
| Variations with the observer position at spacing: | | | | | | | | | | | |
| S = | 1.0H | 6.8 / -31.1 | | | | | 6.8 / -31.1 | | | | |
| | 1.5H | 9.6 / -40.3 | | | | | 9.6 / -42.0 | | | | |
| | 2.0H | 11.6 / -51.6 | | | | | 11.6 / -48.9 | | | | |