

Last information update: October 2024

Product configuration: Q102

Q102: Fixed circular recessed luminaire - Ø125 mm - neutral white - wide flood optic - UGR<19

**Product code**

Q102: Fixed circular recessed luminaire - Ø125 mm - neutral white - wide flood optic - UGR<19

Technical description

Fixed round luminaire designed to use a LED lamp with C.O.B. technology. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Die-cast aluminium body and passive dissipation system. Product complete with LED lamp in neutral white colour tone (4,000K). General light emission, with controlled luminance UGR<19 1500 cd/m² α>65° wide flood optic.

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 20 mm.

Colour

White / Aluminium (39)

Mounting

ceiling recessed

Wiring

product complete with TRIAC components


Complies with EN60598-1 and pertinent regulations



IP20

IP54

On the visible part of the product once installed

**Technical data**

Im system:	2024	CRI (minimum):	80
W system:	17.7	Colour temperature [K]:	4000
Im source:	2500	MacAdam Step:	2
W source:	16	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	114.3	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	81	Number of optical assemblies:	1
Beam angle [°]:	64°	Control:	TRIAC


Polar

Imax=2007 cd		CIE		Lux			
90°	180°	nL 0.81		h	d	Em	Emax
		96-100-100-100-81		2	2.5	384	502
		UGR 18.8-18.8		4	5	96	125
		DIN		6	7.5	43	56
		A.61		8	10	24	31
		UTE					
		0.81A+0.00T					
		F*1=961					
		F*1+F*2=1000					
		F*1+F*2+F*3=1000					
		CIBSE					
		LG3 L<1500 cd/m ² at 65°					
		UGR<19 L<1500 cd/mq @65°					
α=64°							

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	68	65	63	67	64	64	61	76
1.0	75	72	69	67	71	68	68	65	81
1.5	79	77	74	73	76	74	73	70	87
2.0	82	80	78	77	79	77	77	74	92
2.5	84	82	81	80	81	80	79	77	95
3.0	85	84	83	82	82	81	80	78	97
4.0	86	85	84	84	83	83	82	80	98
5.0	86	86	85	85	84	84	82	80	99

Luminance curve limit

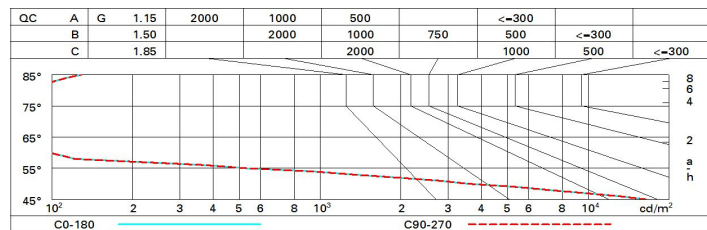

UGR diagram

Corrected UGR values (at 2500 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		0.70 0.50 0.20	0.70 0.30 0.20	0.50 0.50 0.20	0.50 0.30 0.20	0.30 0.30 0.20	0.70 0.50 0.20	0.70 0.30 0.20	0.50 0.50 0.20	0.50 0.30 0.20	0.30 0.30 0.20
viewed crosswise						viewed endwise					
2H	2H	19.4	20.0	19.6	20.2	20.4	19.4	20.0	19.6	20.2	20.4
	3H	19.2	19.8	19.5	20.0	20.3	19.2	19.8	19.5	20.0	20.3
	4H	19.2	19.7	19.5	19.9	20.2	19.2	19.7	19.5	19.9	20.2
	6H	19.1	19.5	19.4	19.9	20.2	19.1	19.5	19.4	19.9	20.2
	8H	19.0	19.5	19.4	19.8	20.1	19.0	19.5	19.4	19.8	20.1
	12H	19.0	19.4	19.4	19.8	20.1	19.0	19.4	19.4	19.8	20.1
4H	2H	19.2	19.7	19.5	19.9	20.2	19.2	19.7	19.5	19.9	20.2
	3H	19.0	19.4	19.4	19.8	20.1	19.0	19.4	19.4	19.8	20.1
	4H	18.9	19.3	19.3	19.7	20.0	18.9	19.3	19.3	19.7	20.0
	6H	18.8	19.2	19.3	19.6	20.0	18.8	19.2	19.3	19.6	20.0
	8H	18.8	19.1	19.2	19.5	19.9	18.8	19.1	19.2	19.5	19.9
	12H	18.7	19.0	19.2	19.4	19.9	18.7	19.0	19.2	19.4	19.9
8H	4H	18.8	19.1	19.2	19.5	19.9	18.8	19.1	19.2	19.5	19.9
	6H	18.7	18.9	19.2	19.4	19.9	18.7	18.9	19.2	19.4	19.9
	8H	18.6	18.8	19.1	19.3	19.8	18.6	18.8	19.1	19.3	19.8
	12H	18.6	18.8	19.1	19.2	19.8	18.6	18.8	19.1	19.2	19.8
12H	4H	18.7	19.0	19.2	19.4	19.9	18.7	19.0	19.2	19.4	19.9
	6H	18.6	18.8	19.1	19.3	19.8	18.6	18.8	19.1	19.3	19.8
	8H	18.6	18.8	19.1	19.2	19.8	18.6	18.8	19.1	19.2	19.8
Variations with the observer position at spacing:											
S =	1.0H	4.7 / -26.2					4.7 / -26.2				
	1.5H	7.5 / -31.2					7.5 / -31.2				
	2.0H	9.5 / -31.4					9.5 / -31.4				