




Wirkungsgrad

R	77	75	73	71	55	53	33	00	DRR
K0.8	74	70	67	65	69	66	66	63	77
1.0	77	73	71	69	72	70	70	67	82
1.5	81	78	76	74	77	75	75	72	88
2.0	83	81	80	78	80	79	78	76	92
2.5	85	83	82	81	82	81	80	78	95
3.0	86	85	84	83	84	83	82	80	97
4.0	87	86	86	85	85	84	83	81	99
5.0	87	87	86	86	86	85	84	82	100

Söllner-Diagramm

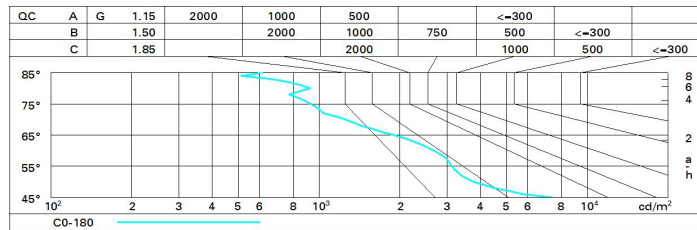

UGR-Diagramm

Corrected UGR values (at 5190 lm bare lamp luminous flux)											
Reflect.:											
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
				viewed crosswise				viewed endwise			
2H	2H	17.0	17.6	17.3	17.8	18.1	17.0	17.6	17.3	17.8	18.1
	3H	16.9	17.4	17.2	17.7	18.0	16.9	17.4	17.2	17.7	18.0
	4H	16.8	17.3	17.1	17.6	17.9	16.8	17.3	17.1	17.6	17.9
	6H	16.7	17.2	17.1	17.5	17.8	16.7	17.2	17.1	17.5	17.8
	8H	16.7	17.1	17.0	17.5	17.8	16.7	17.1	17.0	17.5	17.8
	12H	16.6	17.1	17.0	17.4	17.8	16.6	17.1	17.0	17.4	17.8
4H	2H	16.8	17.3	17.1	17.6	17.9	16.8	17.3	17.1	17.6	17.9
	3H	16.7	17.1	17.0	17.4	17.8	16.7	17.1	17.0	17.4	17.8
	4H	16.6	17.0	17.0	17.3	17.7	16.6	17.0	17.0	17.3	17.7
	6H	16.5	16.8	16.9	17.2	17.6	16.5	16.8	16.9	17.2	17.6
	8H	16.4	16.7	16.9	17.2	17.6	16.4	16.7	16.9	17.2	17.6
	12H	16.4	16.7	16.8	17.1	17.6	16.4	16.7	16.8	17.1	17.6
8H	4H	16.4	16.7	16.9	17.2	17.6	16.4	16.7	16.9	17.2	17.6
	6H	16.4	16.6	16.8	17.1	17.5	16.4	16.6	16.8	17.1	17.5
	8H	16.3	16.5	16.8	17.0	17.5	16.3	16.5	16.8	17.0	17.5
	12H	16.3	16.4	16.8	16.9	17.4	16.3	16.4	16.8	16.9	17.4
12H	4H	16.4	16.7	16.8	17.1	17.6	16.4	16.7	16.8	17.1	17.6
	6H	16.3	16.5	16.8	17.0	17.5	16.3	16.5	16.8	17.0	17.5
	8H	16.3	16.4	16.8	16.9	17.4	16.3	16.4	16.8	16.9	17.4
Variations with the observer position at spacing:											
S =	1.0H		5.7	/ -12.0					5.7	/ -12.0	
	1.5H		8.5	/ -13.0					8.5	/ -13.0	
	2.0H		10.5	/ -14.4					10.5	/ -14.4	