


Design iGuzzini iGuzzini



P092: Large body spotlight - warm white LED - electronic ballast - Flood Optic

P092: Large body spotlight - warm white LED - electronic ballast - Flood Optic **Attention! Code no longer in production**

Adjustable spotlight with adapter for installation on a mains voltage track. Luminaire made of die-cast aluminium. Spotlight double adjustability allows a 360° rotation about the vertical axis and 90° tilting relative to the horizontal plane. Mechanical aiming locks both for rotation about the vertical axis and tilting relative to the horizontal plane. Equipped with ballast. Luminaire complete with warm white colour 3000K LED unit

Installation

On an electrified track

Weight (Kg)

three circuit track

Wiring
Electronic components housed in the luminaire

Complies with EN60598-1 and pertinent regulations




Im system:	5366	CRI (minimum):	80
W system:	50.3	Colour temperature [K]:	3000
Im source:	6800	MacAdam Step:	2
W source:	46	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	106.7	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	79	Number of optical assemblies:	1
Beam angle [°]:	48°		

	Imax =9999 cd CIE nL 0.79 99-100-100-100-79 UGR 10.9-10.9 DIN A.61 UTE 0.79A+0.00T F*1=986 F*1+F*2=997 F*1+F*2+F*3=1000 CIBSE LG3 Lc:3000 cd/m ² at 65° UGR<16 Lc:3000 cd/mq @65°	Lux			
	h	d	Em	E_{max}	
	2	1.8	1946	2496	
	4	3.6	487	624	
	6	5.3	216	277	
8	7.1	122	156		

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	71	67	64	62	66	64	64	61	77
1.0	74	71	68	66	70	68	67	65	82
1.5	78	75	73	72	74	73	72	69	88
2.0	80	78	77	76	77	76	75	73	92
2.5	82	80	79	78	79	78	77	75	95
3.0	83	82	81	80	81	80	79	77	97
4.0	84	83	83	82	82	81	80	78	99
5.0	84	84	83	83	82	82	81	79	100

Luminance curve limit

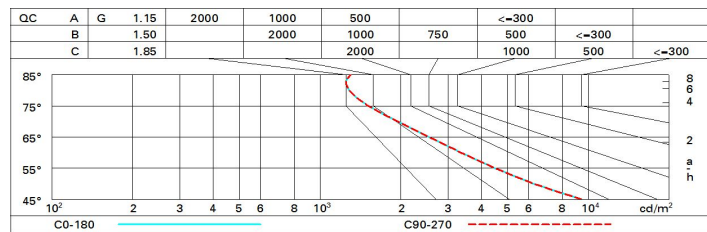

UGR diagram

Corrected UGR values (at 6800 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	11.1	11.8	11.4	12.0	12.2	11.1	11.8	11.4	12.0	12.2
	3H	11.1	11.7	11.4	11.9	12.2	11.1	11.6	11.4	11.9	12.2
	4H	11.1	11.6	11.4	11.9	12.2	11.0	11.5	11.4	11.8	12.1
	6H	11.0	11.5	11.4	11.8	12.1	11.0	11.4	11.3	11.7	12.1
	8H	11.0	11.5	11.4	11.8	12.1	10.9	11.4	11.3	11.7	12.0
	12H	11.0	11.4	11.3	11.7	12.1	10.9	11.3	11.3	11.6	12.0
4H	2H	11.0	11.5	11.4	11.8	12.1	11.1	11.6	11.4	11.9	12.2
	3H	11.0	11.4	11.4	11.8	12.1	11.0	11.5	11.4	11.8	12.1
	4H	11.0	11.4	11.4	11.7	12.1	11.0	11.4	11.4	11.7	12.1
	6H	10.9	11.3	11.4	11.7	12.1	10.9	11.2	11.3	11.6	12.1
	8H	10.9	11.2	11.3	11.6	12.1	10.9	11.2	11.3	11.6	12.0
	12H	10.9	11.2	11.3	11.6	12.0	10.8	11.1	11.3	11.5	12.0
8H	4H	10.9	11.2	11.3	11.6	12.0	10.9	11.2	11.3	11.6	12.1
	6H	10.8	11.1	11.3	11.5	12.0	10.9	11.1	11.3	11.6	12.0
	8H	10.8	11.0	11.3	11.5	12.0	10.8	11.0	11.3	11.5	12.0
	12H	10.8	11.0	11.3	11.5	12.0	10.8	11.0	11.3	11.5	12.0
12H	4H	10.8	11.1	11.3	11.5	12.0	10.9	11.2	11.3	11.6	12.0
	6H	10.8	11.0	11.3	11.5	12.0	10.8	11.0	11.3	11.5	12.0
	8H	10.8	11.0	11.3	11.5	12.0	10.8	11.0	11.3	11.5	12.0
Variations with the observer position at spacing:											
S =		5.2 / -5.0					5.2 / -5.0				
		7.9 / -6.2					7.9 / -6.2				
		9.8 / -7.0					9.8 / -7.0				