

Laser Blade XS



Design iGuzzini iGuzzini

Design iGuzzini iGuzzini

Last information update: June 2025

Product configuration: Q869

Q869: LB XS pendant HC - 4 cells - Wide Flood beam - integrated driver

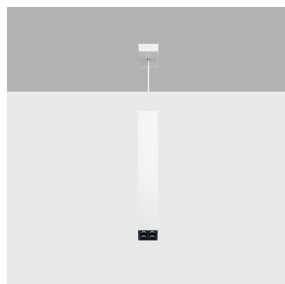

Product code

Q869: LB XS pendant HC - 4 cells - Wide Flood beam - integrated driver

Technical description

Pendant luminaire with 4 optical elements for LED lamps, ideal for zenithal accent lighting. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient luminous flux and a high level of visual comfort. Metallised thermoplastic high definition Opti-Beam reflectors. Extruded aluminium body and die-cast zamak technical dissipation unit. Thermoplastic ceiling rose with shaped steel fixing plate. PVC power/pendant cable in the same colour as the external finish. The cable connection on the pendant body is fitted with a manual adjustment system that facilitates alignment. ON-OFF driver integrated in luminaire body.

Installation

Ceiling rose with surface fixing plate (screws and screw anchors not included)

Colour	Weight (Kg)
--------	-------------

White (01) | Black / Black (43) | Black / White (47) | White/Gold (41)* | Black/gold (44)* | White / burnished chrome (E7)* | Black/burnished chrome (F1)*

Weight (Kg)

0.64

* Colours on request

Mounting

ceiling pendant

Wiring

Connection terminal included on ceiling plate - the pendant cable can be adjusted on the pendant body


Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	789	CRI (minimum):	90
W system:	10.2	Colour temperature [K]:	4000
Im source:	950	MacAdam Step:	2
W source:	8	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	77.3	Voltage [Vin]:	230
Im in emergency mode:	-	Lamp code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of lamps for optical assembly:	1
Light Output Ratio (L.O.R.) [%]:	83	ZVEI Code:	LED
Beam angle [°]:	58°	Number of optical assemblies:	1


Polar

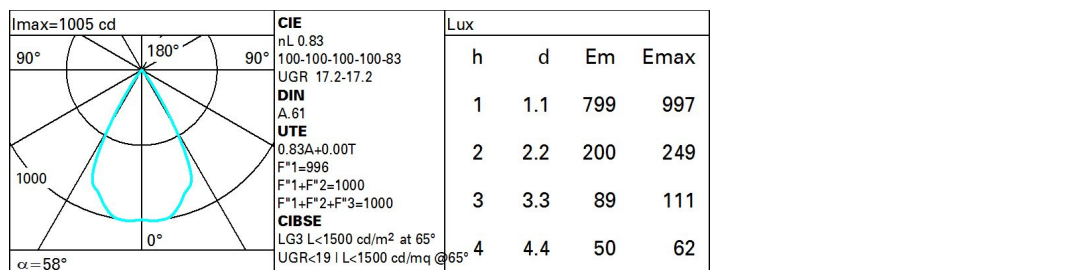

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	71	68	66	70	68	68	65	78
1.0	78	75	72	70	74	72	71	69	83
1.5	82	79	77	76	78	77	76	73	89
2.0	85	83	81	80	82	80	79	77	93
2.5	86	85	84	83	84	83	82	79	96
3.0	87	86	85	85	85	84	83	81	98
4.0	88	87	87	86	86	86	84	82	99
5.0	89	88	88	88	87	86	85	83	100

Luminance curve limit

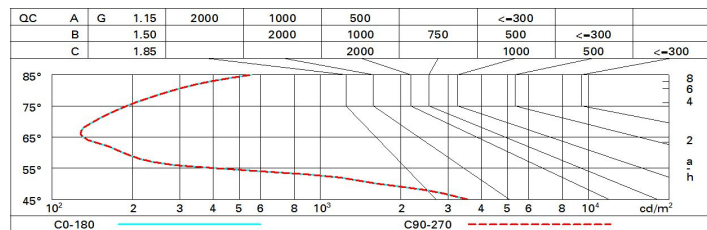

UGR diagram

Corrected UGR values (at 950 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	17.8	18.4	18.1	18.7	18.9	17.8	18.4	18.1	18.7	18.9
	3H	17.7	18.2	18.0	18.5	18.8	17.7	18.2	18.0	18.5	18.8
	4H	17.6	18.1	17.9	18.4	18.7	17.6	18.1	17.9	18.4	18.7
	6H	17.5	18.0	17.9	18.3	18.6	17.5	18.0	17.9	18.3	18.6
	8H	17.5	17.9	17.9	18.3	18.6	17.5	17.9	17.9	18.3	18.6
	12H	17.5	17.9	17.8	18.2	18.6	17.5	17.9	17.8	18.2	18.6
4H	2H	17.6	18.1	17.9	18.4	18.7	17.6	18.1	17.9	18.4	18.7
	3H	17.5	17.9	17.8	18.2	18.6	17.5	17.9	17.8	18.2	18.6
	4H	17.4	17.7	17.8	18.1	18.5	17.4	17.7	17.8	18.1	18.5
	6H	17.3	17.6	17.7	18.0	18.4	17.3	17.6	17.7	18.0	18.4
	8H	17.2	17.5	17.7	18.0	18.4	17.2	17.5	17.7	18.0	18.4
	12H	17.2	17.5	17.6	17.9	18.3	17.2	17.5	17.6	17.9	18.3
8H	4H	17.2	17.5	17.7	18.0	18.4	17.2	17.5	17.7	18.0	18.4
	6H	17.1	17.4	17.6	17.8	18.3	17.1	17.4	17.6	17.8	18.3
	8H	17.1	17.3	17.6	17.8	18.3	17.1	17.3	17.6	17.8	18.3
	12H	17.0	17.2	17.5	17.7	18.2	17.0	17.2	17.5	17.7	18.2
12H	4H	17.2	17.5	17.6	17.9	18.3	17.2	17.5	17.6	17.9	18.3
	6H	17.1	17.3	17.6	17.8	18.3	17.1	17.3	17.6	17.8	18.3
	8H	17.0	17.2	17.5	17.7	18.2	17.0	17.2	17.5	17.7	18.2
Variations with the observer position at spacing:											
S =	1.0H	6.5 / -24.9					6.5 / -24.9				
	1.5H	9.4 / -25.6					9.4 / -25.6				
	2.0H	11.4 / -25.8					11.4 / -25.8				