


Last information update: October 2024

Product configuration: QQ51

QQ51: 2 - cell, Recessed, Frameless luminaire - Neutral white LED - Flood optic



Product code

QQ51: 2 - cell, Recessed, Frameless luminaire - Neutral white LED - Flood optic

Technical description

rectangular miniaturised recessed luminaire with 2 optical elements and LED lamps - fixed optic - flood beam angle. Die-cast aluminium body, minimal version (frameless). Metallised, thermoplastic, high definition optic, integrated in a rear position in the black, anti-glare screen. Connecting cable supplied. Ballast not included, available with separate code. Neutral white LED.

Installation

recessed with steel wire springs on the specific adapter (included) which allows flush-mounting with the ceiling. Adapter for fitting luminaire to false ceilings (12.5 mm thick) with self-tapping screws; subsequent filling and smoothing operations; insertion of luminaire body and stylish finishing. Preparation hole 64 x 35

Colour

White (01) | Black (04)


Mounting

wall recessed|ceiling recessed|ceiling surface

Wiring

Direct current ballasts to be ordered separately: electronic (MXF9) for max. 7 LEDs; 0-10V dimmable (Y360) for max. 18 LEDs; DALI dimmable (BZM4) for max. 15 LEDs (check instruction leaflet for compatible lengths of cables to be used)

Complies with EN60598-1 and pertinent regulations



Technical data

lm system:	331	CRI (typical):	97
W system:	4.2	Colour temperature [K]:	4000
lm source:	400	MacAdam Step:	3
W source:	4.2	Life Time LED 1:	50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	78.9	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	83	Number of optical assemblies:	1
Beam angle [°]:	32°	LED current [mA]:	700
CRI (minimum):	95	Control:	DALI-2


Polar

	Imax=1113 cd 90° 180° 90° 1000 0° α=32°	CIE nL 0.83 100-100-100-100-83 UGR <10-<10 DIN A.61 UTE 0.83A+0.00T F*1=999 F*1+F*2=999 F*1+F*2+F*3=1000 CIBSE LG3 L<1500 cd/m ² at 65° UGR<10 L<1500 cd/mq @65°	Lux h d Em Emax 1 0.6 865 1113 2 1.1 216 278 3 1.7 96 124 4 2.3 54 70
--	--	--	---

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	71	68	66	70	68	68	65	78
1.0	78	75	72	70	74	72	71	69	83
1.5	82	79	77	76	78	77	76	73	89
2.0	84	83	81	80	81	80	79	77	93
2.5	86	85	84	83	83	82	82	79	96
3.0	87	86	85	85	85	84	83	81	98
4.0	88	87	87	86	86	86	84	82	99
5.0	89	88	88	87	87	86	85	83	100

Luminance curve limit

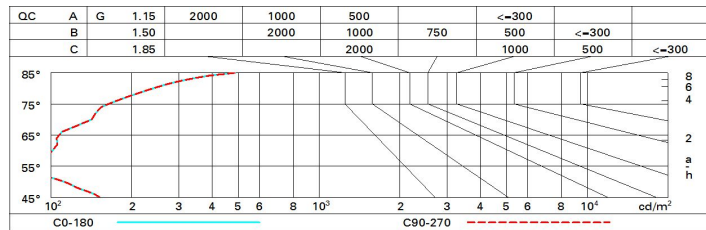

UGR diagram

Corrected UGR values (at 400 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	-2.7	-2.2	-2.4	-1.9	-1.7	-2.7	-2.2	-2.4	-1.9	-1.7
	3H	-2.8	-2.3	-2.5	-2.0	-1.8	-2.8	-2.3	-2.5	-2.1	-1.8
	4H	-2.8	-2.3	-2.5	-2.1	-1.8	-2.9	-2.4	-2.5	-2.2	-1.9
	6H	-2.8	-2.3	-2.4	-2.0	-1.7	-2.9	-2.5	-2.6	-2.2	-1.9
	8H	-2.7	-2.3	-2.3	-2.0	-1.7	-3.0	-2.6	-2.6	-2.3	-1.9
	12H	-2.6	-2.2	-2.2	-1.9	-1.5	-3.0	-2.6	-2.6	-2.3	-2.0
4H	2H	-2.9	-2.4	-2.5	-2.2	-1.9	-2.8	-2.3	-2.5	-2.1	-1.8
	3H	-2.9	-2.6	-2.6	-2.2	-1.9	-2.9	-2.5	-2.5	-2.2	-1.8
	4H	-2.9	-2.6	-2.5	-2.2	-1.9	-2.9	-2.6	-2.5	-2.2	-1.9
	6H	-2.8	-2.5	-2.4	-2.1	-1.7	-3.0	-2.7	-2.6	-2.3	-1.9
	8H	-2.7	-2.5	-2.3	-2.0	-1.6	-3.0	-2.7	-2.6	-2.3	-1.9
	12H	-2.5	-2.3	-2.1	-1.8	-1.4	-3.0	-2.8	-2.6	-2.4	-1.9
8H	4H	-3.0	-2.7	-2.6	-2.3	-1.9	-2.7	-2.5	-2.3	-2.0	-1.6
	6H	-2.8	-2.6	-2.3	-2.2	-1.7	-2.7	-2.4	-2.2	-2.0	-1.5
	8H	-2.6	-2.4	-2.1	-2.0	-1.5	-2.6	-2.4	-2.1	-2.0	-1.5
	12H	-2.3	-2.1	-1.8	-1.6	-1.1	-2.6	-2.4	-2.1	-1.9	-1.4
12H	4H	-3.0	-2.8	-2.6	-2.4	-1.9	-2.5	-2.3	-2.1	-1.8	-1.4
	6H	-2.8	-2.6	-2.3	-2.2	-1.7	-2.4	-2.2	-1.9	-1.7	-1.2
	8H	-2.6	-2.4	-2.1	-1.9	-1.4	-2.3	-2.1	-1.8	-1.6	-1.1
Variations with the observer position at spacing:											
S =	1.0H	5.6 / -3.8					5.6 / -3.8				
	1.5H	8.3 / -4.0					8.3 / -4.0				
	2.0H	10.3 / -4.1					10.3 / -4.1				