




### Isolux

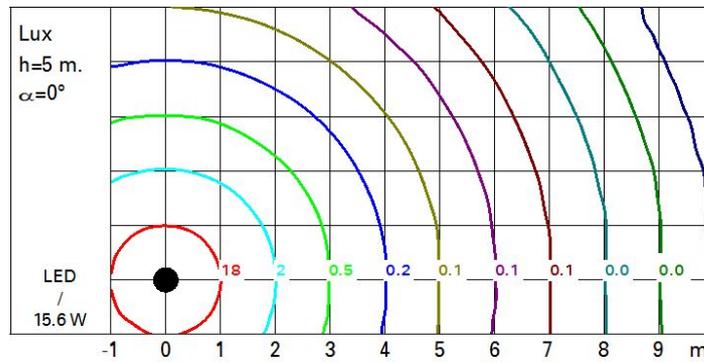

### Diagramma UGR

Corrected UGR values (at 1250 lm bare lamp luminous flux)											
Riflect.:		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
ceiling/cav											
walls											
work pl.											
Room dim		viewed					viewed				
x	y	crosswise					endwise				
2H	2H	2.1	4.0	2.4	4.3	4.7	2.0	4.0	2.3	4.3	4.6
	3H	2.4	3.4	2.7	3.7	4.0	2.4	3.4	2.7	3.7	4.0
	4H	2.4	3.1	2.7	3.4	3.7	2.5	3.1	2.8	3.4	3.8
	6H	2.4	2.7	2.7	3.1	3.4	2.5	2.8	2.8	3.1	3.5
	8H	2.2	2.8	2.6	3.2	3.5	2.3	2.9	2.7	3.3	3.6
	12H	2.1	2.9	2.5	3.3	3.6	2.2	3.0	2.6	3.4	3.7
4H	2H	2.5	3.2	2.9	3.5	3.8	2.3	3.0	2.6	3.3	3.6
	3H	2.6	3.4	3.0	3.8	4.2	2.5	3.3	2.9	3.6	4.0
	4H	2.3	3.7	2.8	4.1	4.6	2.3	3.7	2.7	4.1	4.5
	6H	2.0	3.9	2.5	4.4	4.9	2.0	3.9	2.5	4.3	4.8
	8H	1.9	3.9	2.4	4.4	4.9	1.9	3.8	2.4	4.3	4.8
	12H	1.9	3.8	2.4	4.2	4.8	1.8	3.7	2.3	4.2	4.7
8H	4H	2.0	3.9	2.5	4.4	4.9	1.9	3.8	2.4	4.3	4.8
	6H	2.0	3.5	2.5	3.9	4.5	1.9	3.4	2.4	3.9	4.4
	8H	2.1	3.1	2.6	3.6	4.1	2.0	3.0	2.5	3.5	4.0
	12H	2.2	2.7	2.8	3.2	3.7	2.2	2.6	2.7	3.1	3.6
	12H	4H	1.9	3.8	2.4	4.3	4.8	1.8	3.7	2.3	4.2
	6H	2.1	3.1	2.6	3.6	4.1	2.0	3.0	2.5	3.5	4.0
	8H	2.2	2.7	2.8	3.2	3.7	2.2	2.6	2.7	3.1	3.6
Variations with the observer position at spacing:											
S =	1.0H	0.5 / -0.8					0.5 / -0.8				
	1.5H	0.6 / -1.7					0.7 / -1.8				
	2.0H	1.0 / -7.5					1.0 / -7.6				