

Front Light


Design iGuzzini

iGuzzini

Last information update: May 2024

Product configuration: MH88+L346

MH88: Spotlight - Large body - 50W HIT-TC-CE - Electronic ballast

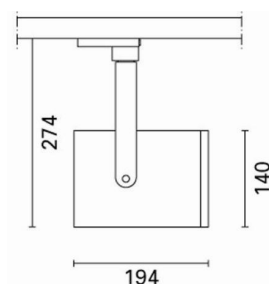

Product code

MH88: Spotlight - Large body - 50W HIT-TC-CE - Electronic ballast **Attention! Code no longer in production**

Technical description

Adjustable spotlight with adapter for installation on a mains voltage track. Luminaire made of die-cast aluminium. Spotlight double adjustability allows a 360° rotation about the vertical axis and 90° tilting relative to the horizontal plane. Mechanical aiming locks both for rotation about the vertical axis and tilting relative to the horizontal plane. Equipped with electronic ballast. An external component may be applied, such as directional flaps with 360° rotation and which can be fully closed. Luminaire supplied with wideflood optic 50W HIT G8.5 High performance reflector. IP 40 on the optical assembly.

Installation

Installation on electrified tracks.

Colour

White (01) | Black (04) | Grey / Black (74)

Mounting

three circuit track

Wiring

Electronic components for discharge lamp housed in the body

Complies with EN60598-1 and pertinent regulations



Technical data

lm system:	4376	CRI:	90
W system:	55	Colour temperature [K]:	3000
lm source:	5400	Voltage [Vin]:	230
W source:	50	Lamp code:	L346
Luminous efficiency (lm/W, real value):	79.6	Socket:	G8,5
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	HIT-TC-CE
Light Output Ratio (L.O.R.) [%]:	81	Number of optical assemblies:	1
Beam angle [°]:	56°		


Polar

<p>Imax=4733 cd</p> <p>90° 180° 90°</p> <p>5000</p> <p>0°</p> <p>$\alpha = 56^\circ$</p>	CIE nL 0.81 87-99-100-100-81 UGR 23.3-23.3 DIN A.61 UTE 0.81A+0.00T F*1=867 F*1+F*2=991 F*1+F*2+F*3=999			
	Lux			
	h	d	Em	Emax
	2	2.1	834	1183
	4	4.3	208	296
	6	6.4	93	131
	8	8.5	52	74

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	68	63	60	57	62	59	59	56	69
1.0	72	68	65	62	67	64	64	60	74
1.5	78	74	72	69	73	71	70	67	83
2.0	81	78	76	74	77	75	74	71	88
2.5	82	80	79	77	79	78	77	74	92
3.0	84	82	81	80	81	80	78	76	94
4.0	85	84	83	82	82	81	80	78	96
5.0	85	84	84	83	83	82	81	79	97

Luminance curve limit

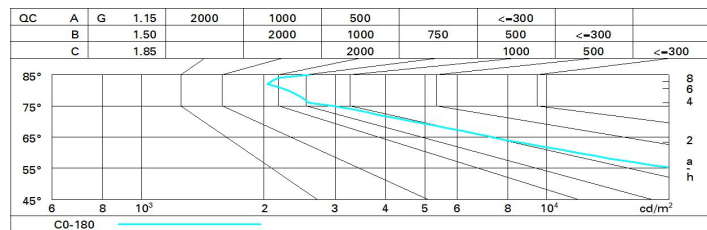

UGR diagram

Corrected UGR values (at 5400 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	23.8	24.0	24.1	24.8	25.0	23.8	24.0	24.1	24.8	25.0
	3H	23.7	24.4	24.0	24.6	24.9	23.7	24.4	24.0	24.6	24.9
	4H	23.6	24.2	23.9	24.5	24.8	23.6	24.2	23.9	24.5	24.8
	6H	23.5	24.1	23.9	24.4	24.8	23.5	24.1	23.9	24.4	24.8
	8H	23.5	24.0	23.9	24.4	24.7	23.5	24.0	23.9	24.4	24.7
	12H	23.4	24.0	23.8	24.3	24.7	23.5	24.0	23.8	24.3	24.7
4H	2H	23.6	24.2	23.9	24.5	24.8	23.6	24.2	23.9	24.5	24.8
	3H	23.5	24.0	23.9	24.4	24.7	23.5	24.0	23.9	24.4	24.7
	4H	23.4	23.9	23.8	24.2	24.6	23.4	23.9	23.8	24.2	24.6
	6H	23.3	23.7	23.8	24.1	24.6	23.3	23.7	23.7	24.1	24.5
	8H	23.3	23.7	23.7	24.1	24.5	23.3	23.7	23.7	24.1	24.5
	12H	23.2	23.6	23.7	24.0	24.5	23.2	23.6	23.7	24.0	24.5
8H	4H	23.3	23.7	23.7	24.1	24.5	23.3	23.7	23.7	24.1	24.5
	6H	23.2	23.5	23.7	23.9	24.4	23.2	23.5	23.7	23.9	24.4
	8H	23.1	23.4	23.6	23.9	24.4	23.1	23.4	23.6	23.9	24.4
	12H	23.1	23.3	23.6	23.8	24.3	23.1	23.3	23.6	23.8	24.3
12H	4H	23.2	23.6	23.7	24.0	24.5	23.2	23.6	23.7	24.0	24.5
	6H	23.1	23.4	23.6	23.9	24.4	23.1	23.4	23.6	23.9	24.4
	8H	23.1	23.3	23.6	23.8	24.3	23.1	23.3	23.6	23.8	24.3
Variations with the observer position at spacing:											
S =		1.0H				2.5 / -7.5				2.5 / -7.5	
		1.5H				4.9 / -10.7				4.9 / -10.7	
		2.0H				6.9 / -12.5				6.9 / -12.5	