


Last information update: March 2025

Product configuration: EI34.F5

EI34.F5: Square optic assembly 90x90mm – AL optic – Neutral White LED – 24Vdc - Rust Brown

**Product code**

EI34.F5: Square optic assembly 90x90mm – AL optic – Neutral White LED – 24Vdc - Rust Brown

Technical description

Luminaire for walkways designed to use high visual comfort LED lamps. Ceiling and wall-recessed installation. It consists of an optical assembly with an IP66 protection rating and an outer casing or wall-mounted base to be ordered separately. The optical assembly and base are made of aluminium alloy treated with powder paint, which provides a high level of resistance to weather and UV rays. Plastic closure guard at the rear of the optical assembly. Complete with plastic cable gland and outlet cable. Sodium-calcium tempered satin finish safety glass. Luminaire with no visible screws and an anti-vandal system that uses an opening key to access the rear wiring compartment (supplied in the package). All external screws used are made of A2 stainless steel.

Installation

Wall-recessed installation with a plastic outer casing to be ordered separately. Disposable polystyrene formwork for creating the outer casing housings for installations in concrete walls that are then plastered or finished with bricks so the end surface is flush with the optical assembly. If ceiling-mounted an aluminium base is used to be ordered separately.

Colour

Rust Brown (F5)*

Weight (Kg)

0.18

* Colours on request

Mounting

wall arm|wall recessed|wall surface

Wiring


Version with remote 24Vdc ballast.

Complies with EN60598-1 and pertinent regulations


**Technical data**

Im system:	108	Life Time LED 1:	100,000h - L85 - B10 (Ta 25°C)
W system:	4.6	Life Time LED 2:	100,000h - L80 - B10 (Ta 40°C)
Im source:	570	Voltage [Vin]:	24
W source:	3.2	Lamp code:	LED
Luminous efficiency (Im/W, real value):	23.5	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	2	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	19	Intervallo temperatura ambiente:	from -30°C to 50°C.
CRI (minimum):	80	LED current [mA]:	50
Colour temperature [K]:	4000	Control:	PWM
MacAdam Step:	3		

Polar

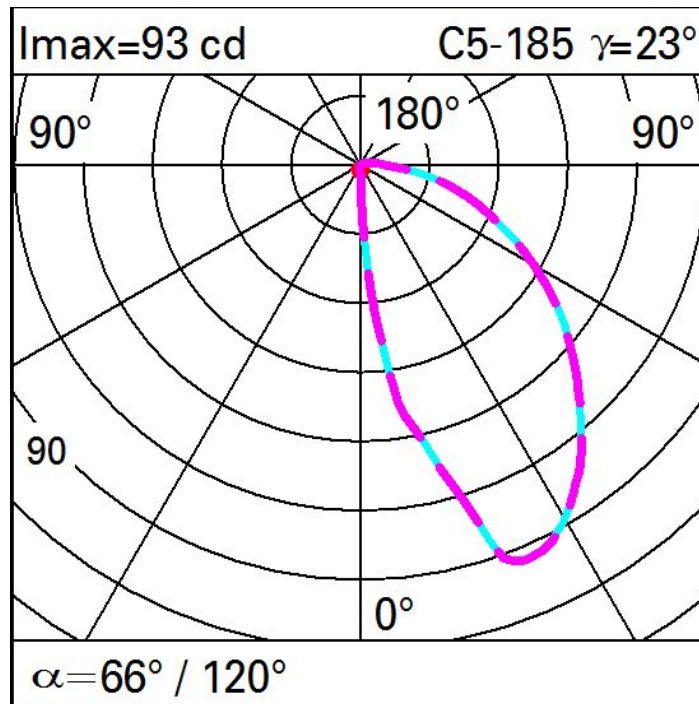

Isolux

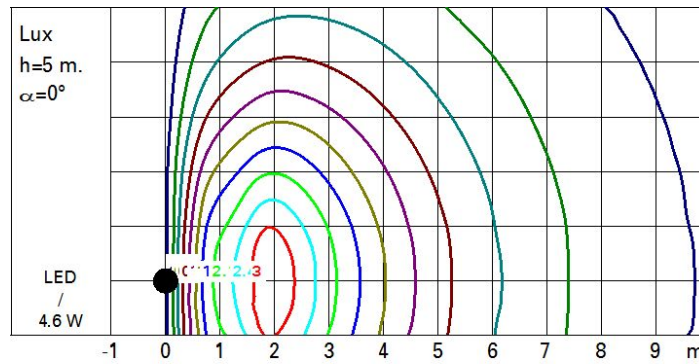

Illuminances

