


**Product configuration: EZ04.15**  
EZ04.15: 47 surface Integral – Warm White – 220÷240Vac DMX512-RDM – L=1205mm – Spot optic - 51.5W 4108lm - 2700K - Grey



EZ04.15: 47 surface Integral – Warm White – 220÷240Vac DMX512-RDM – L=1205mm – Spot optic - 51.5W 4108lm - 2700K - Grey

Direct light luminaire, designed to use monochrome LED lamps, DMX512-RDM 220÷240Vac dimmable with searching and addressing function. Ceiling, wall or surface-mounted. It consists of a body and installation brackets to be ordered separately. The body is made of extruded aluminium and includes die-cast aluminium end caps with 50/60 Shore A silicone seals. It is subjected to a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The following painting stage consists of a primer and a liquid acrylic paint, cured at 150°C, with a high level of weather and UV ray resistance. The top of the optical assembly is closed by a 3 mm thick transparent glass screen, fixed with silicone. Complete with multi-LED plate in Warm White and a 220÷240Vac DMX512-RDM electronic driver (ballast included). Supplied with a double PG11 and outlet cables for pass-through wiring with IP68 male/female joiners. Fitted with optics with a plastic (methacrylate) lens for spot lighting. All external screws used are made of A2 stainless steel. The luminaire technical characteristics conform to EN 60598-1 standards and particular requirements.

Accessories are available for installation, like adjustable AISI304 stainless steel wall-mounted arms.



Weight (Kg)  
3.3

wall arm|wall surface|ceiling surface

Complete with DMX-RDM control card and a 220-240V ac electronic ballast. The product is supplied with a nickel-plated brass PG11 double cable gland with H07RN-F 5x1, 5mm<sup>2</sup> rubber outlet cables for pass-through wiring with male and female IP68 connectors. Available for electrical connection and DMX-RDM control: IP68 5-pin female connector, IP68 5-pin male connector + closing cap (BZ16), and IP68 5-pin male + female connectors.


Product complete with LED lamp. DMX specifications require the insertion of a 120 Ohm terminating resistor to be placed between the DATA+ and DATA- cables of the last product in the line (BZQ7).

Complies with EN60598-1 and pertinent regulations



Im system:	4108	MacAdam Step:	3
W system:	51.5	Life Time LED 1:	100,000h - L80 - B10 (Ta 25°C)
Im source:	5200	Life Time LED 2:	100,000h - L80 - B10 (Ta 40°C)
W source:	41	Voltage [Vin]:	230
Luminous efficiency (lm/W, real value):	79.8	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	79	Number of optical assemblies:	1
Beam angle [°]:	12°	Intervallo temperatura ambiente:	from -30°C to 50°C.
CRI (minimum):	80	Control:	DMX-RDM
Colour temperature [K]:	2700		

Polar

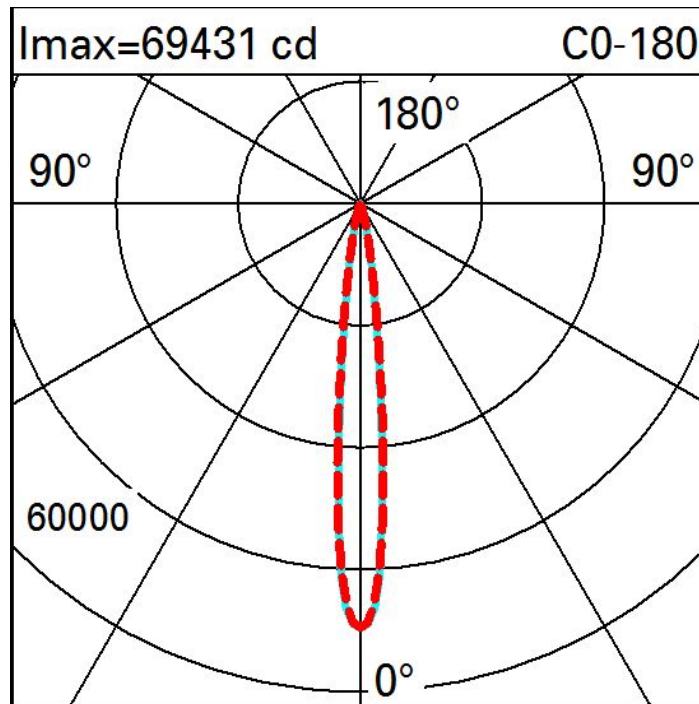

Illuminances

Lux													Wall distance = 1m	
3														
				0.1	0.3	0.9	1	0.9	0.3	0.1				
2	0.2	0.5	1	2	3	6	6	3	2	1	0.5	0.2		
		0.6	1	2	4	6	8	6	4	2	1	0.6		
1	0.6	1	2	4	8	14	14	8	4	2	1	0.6		
		0.7	1	2	4	10	20	10	4	2	1	0.7		
0														
	m	-2	-1			0			1	2	3			