


Last information update: April 2025

Product configuration: QG73

QG73: Warm white medium body spotlight - DALI ballast - wide flood optic

**Product code**

QG73: Warm white medium body spotlight - DALI ballast - wide flood optic

Technical description

Adjustable spotlight with adapter for installation on DALI track for high output LED lamp with monochrome emission in a warm White (3,000K) tone. DALI ballast integrated in the product. Luminaire made of die-cast aluminium and thermoplastic material, allows 360° rotation about the vertical axis and 90° tilting relative to the horizontal plane. The luminaire has mechanical aiming locks for both movements, operated using the same tool on two screws, one at the side of the rod and one on the adapter for the track. Passive heat dissipation. Reflector in superpure mirrored aluminium with special faceting that improves the distribution of the light beam (OPTIBEAM). Spotlight can hold up to two flat accessories at the same time. Another external component can also be applied, selected from directional flaps and an anti-glare screen. All external accessories rotate 360° about the spotlight longitudinal axis.

Installation

On a DALI electrified track

Colour

White (01) | Black (04)

Weight (Kg)

2.1

Mounting

dali track|wall surface|ceiling surface

Wiring

DALI components housed in the luminaire

Sistemi di controllo compatibili:

Quick BLE [↗](#)
Quick DALI - Touch display 7" [↗](#)
Quick DALI LMS Quick [↗](#)
Master Pro Evo KNX [↗](#)

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	2960	CRI (minimum):	97
W system:	41.7	Colour temperature [K]:	3000
Im source:	3750	MacAdam Step:	2
W source:	36	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	71	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	79	Number of optical assemblies:	1
Beam angle [°]:	42°	Control:	DALI-2

Polar

	Lux			
	h	d	Em	Emax
	2	1.6	1316	1594
	4	3.1	329	399
	6	4.7	146	177
	8	6.3	82	100

Imax=6484 cd

90° 180° 90°

6000

0°


α = 43°

CIE
nL 0.79
99-100-100-100-79
UGR <10- <10
DIN
A.61
UTE
0.79A+0.00T
F*1=994
F*1+F*2=999
F*1+F*2+F*3=1000
CIBSE
LG3 L<1500 cd/m² at 65°
UGR<10 | L<1500 cd/mq @65°

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	71	67	65	63	67	65	64	62	78
1.0	74	71	69	67	70	68	68	65	83
1.5	78	75	74	72	75	73	72	70	88
2.0	80	79	77	76	78	76	75	73	93
2.5	82	81	79	79	79	78	78	75	96
3.0	83	82	81	80	81	80	79	77	98
4.0	84	83	83	82	82	81	80	78	99
5.0	84	84	83	83	83	82	81	79	100

Luminance curve limit

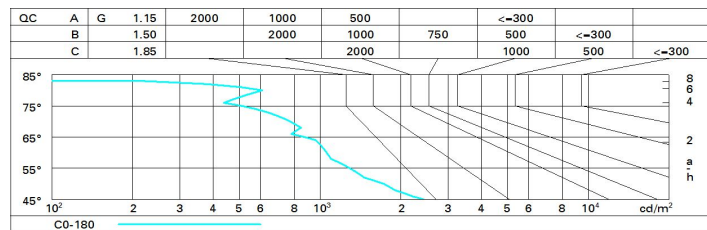

UGR diagram

Corrected UGR values (at 3750 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	4.9	5.5	5.2	5.7	6.0	4.9	5.5	5.2	5.7	6.0
	3H	4.9	5.4	5.2	5.7	6.0	4.9	5.4	5.2	5.6	5.9
	4H	4.9	5.4	5.2	5.7	6.0	4.8	5.3	5.2	5.6	5.9
	6H	4.9	5.3	5.2	5.6	5.9	4.8	5.2	5.1	5.5	5.8
	8H	4.8	5.3	5.2	5.6	5.9	4.7	5.1	5.1	5.5	5.8
	12H	4.8	5.2	5.2	5.5	5.9	4.7	5.1	5.1	5.4	5.8
4H	2H	4.8	5.3	5.2	5.6	5.9	4.9	5.4	5.2	5.7	6.0
	3H	4.8	5.2	5.2	5.6	5.9	4.9	5.3	5.2	5.6	5.9
	4H	4.8	5.2	5.2	5.5	5.9	4.8	5.2	5.2	5.5	5.9
	6H	4.8	5.1	5.2	5.5	5.9	4.7	5.1	5.2	5.5	5.9
	8H	4.8	5.0	5.2	5.5	5.9	4.7	5.0	5.1	5.4	5.8
	12H	4.7	5.0	5.2	5.4	5.9	4.7	4.9	5.1	5.4	5.8
8H	4H	4.7	5.0	5.1	5.4	5.8	4.8	5.0	5.2	5.5	5.9
	6H	4.7	4.9	5.2	5.4	5.9	4.7	4.9	5.2	5.4	5.9
	8H	4.7	4.9	5.2	5.3	5.8	4.7	4.9	5.2	5.3	5.8
	12H	4.6	4.8	5.1	5.3	5.8	4.6	4.8	5.1	5.3	5.8
12H	4H	4.7	4.9	5.1	5.4	5.8	4.7	5.0	5.2	5.4	5.9
	6H	4.7	4.9	5.1	5.3	5.8	4.7	4.9	5.1	5.3	5.8
	8H	4.6	4.8	5.1	5.3	5.8	4.6	4.8	5.1	5.3	5.8
Variations with the observer position at spacing:											
S =		1.0H					5.6 / -5.4				
		1.5H					8.3 / -6.1				
		2.0H					10.2 / -6.8				