

Last information update: February 2025

**Product configuration: RU31.12+RW62.04**

RU31.12: Linear module - recessed Minimal Down - for Wall Washer version - L=597 - Aluminium

RW62.04: Plate with Warm White LED - Downlight - Wall Washer - HO - DALI - L=598 - 9.9W 784lm - 3000K - CRI 90 - Black

**Product code**

RU31.12: Linear module - recessed Minimal Down - for Wall Washer version - L=597 - Aluminium

**Technical description**

Recessed Minimal (Frameless) version with extruded aluminium profile installed flush with ceiling. Designed for use with an LED plate in a Wall Washer version.

**Installation**

Can be recess-mounted.

**Colour**

Aluminium (12)

**Wiring**

Designed to house the LED modules that can be used by the system.

Complies with EN60598-1 and pertinent regulations

**Product code**

RW62.04: Plate with Warm White LED - Downlight - Wall Washer - HO - DALI - L=598 - 9.9W 784lm - 3000K - CRI 90 - Black

**Technical description**

Warm White LED plate with direct (Down) light emission. Wall Washer High Output (HO) Wall Washer version to be used with suitable profiles to be ordered separately. The module optic and structural fittings allow high luminous flux and system efficiency values. DALI dimmable power supply integrated in the luminaire. Extruded aluminium heat sink formally designed to house the exclusive asymmetric optic system that generates an even and effective wall washer emission. Linear PMMA screen combined with a special acrylic film; anodised aluminium main beam reflector and side reflectors. "Halogen Free" electric cables.

**Installation**

Module insertion on profiles facilitated by a quick coupling system.

**Colour**  
Black (04)

**Weight (Kg)**  
1.04

**Wiring**

Quick coupling terminal block connection to simplify connections between the subsequent modules. Complete with integrated dimmable DALI power supply.

Complies with EN60598-1 and pertinent regulations




IP20

**Technical data**

Im system:	784	Colour temperature [K]:	3000
W system:	9.9	MacAdam Step:	3
Im source:	1400	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	8.3	Lamp code:	LED
Luminous efficiency (Im/W, real value):	79.2	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	56	Number of optical assemblies:	1
CRI (minimum):	90	Control:	DALI-2

Polar

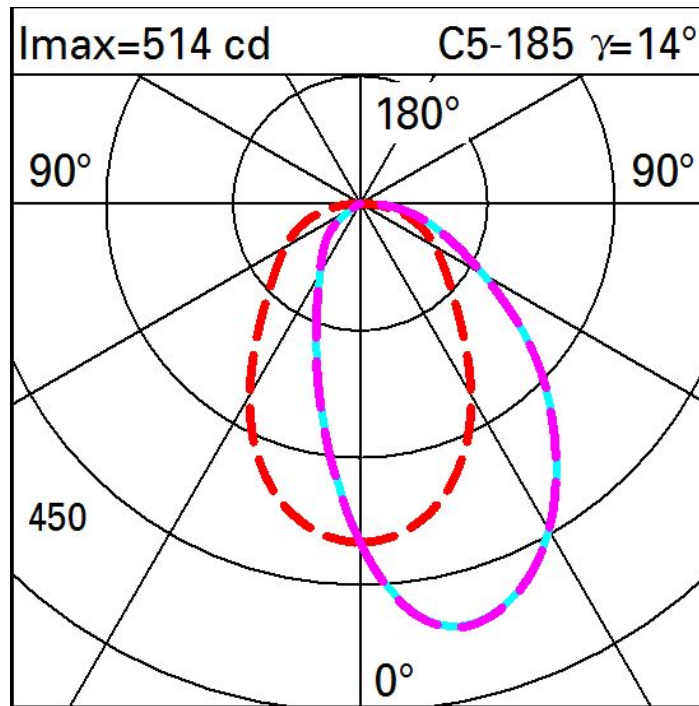

Illuminances

