


Product configuration: UH34+Ta35°C

UH34: Spotlight with bracket (to be ordered separately) - Neutral White LED - Remote Ballast - Wall Washer optic - Class I



UH34: Spotlight with bracket (to be ordered separately) - Neutral White LED - Remote Ballast - Wall Washer optic - Class I

Spotlight description:
Spotlight designed to use LED lamps and a Wall Washer optic. Consists of a die-cast aluminium optical assembly, steel brackets (both a bracket for the spotlight and a bracket for handle/pole application) and a clear, tempered sodium-calcium safety glass cover. It is fitted with an A2 stainless steel cable gland and a 2x1mm2 section 05RN-F cable. The optical assembly can be adjusted on a horizontal plane at an angle between -50° / +90°. Agorà is fitted with a graduated scale and mechanical locking device for positioning. The Opti Beam Lens optical system comes complete with a Neutral White monochrome LED circuit. The electronic DALI ballast is remote and can be ordered separately to allow the spotlights to be connected in series. The spotlight is fitted with a protection system that in the event of a fault allows all the other products in the same circuit to operate normally. Class I, IP67 rated power supply units must be used (all the necessary information is included in the instruction sheet). Both indoor (diffuser glass covers, lamellar louvers and refractors for elliptical light) and outdoor accessories (cylindrical screens, visors and protective grilles) can be used. All external screws used are made of A2 stainless steel.

Floor-installed or wall-mounted with a bracket or handle (special bracket).

Weight (Kg)
3.6


A2 stainless steel cable gland.

Complies with EN60598-1 and pertinent regulations



Im system:	4867	Colour temperature [K]:	4000
W system:	60.9	MacAdam Step:	3
Im source:	7850	Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)
W source:	52	Lamp code:	LED
Luminous efficiency (lm/W, real value):	79.9	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	62	Intervallo temperatura ambiente:	from -30°C to 35°C.
CRI (minimum):	80	Control:	DALI-2

Polar

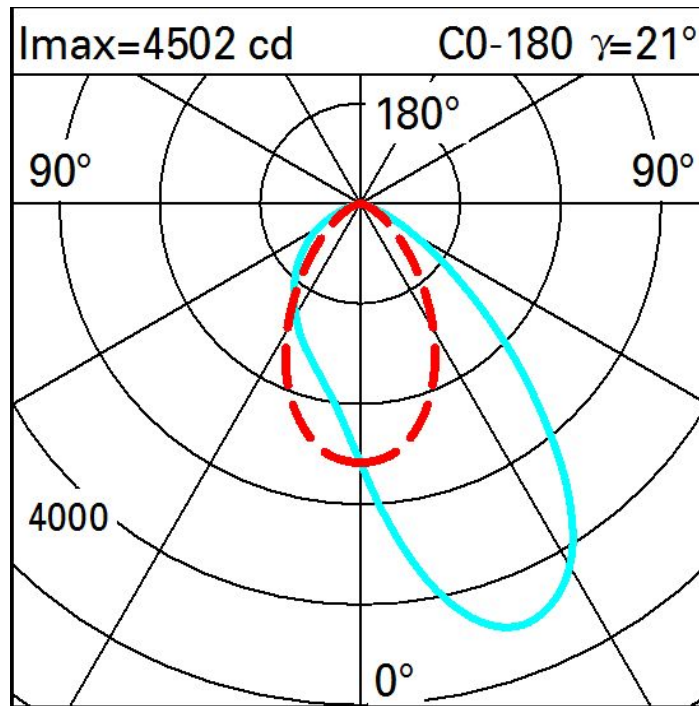

Illuminances

Lux													Wall distance = 1m	
3														
	0.1	0.6	4	24	109	224	109	24	4	0.6	0.1			
2	3	10	32	120	401	769	401	120	32	10	3			
	8	21	59	184	461	666	461	184	59	21	8			
1	13	28	71	172	327	414	327	172	71	28	13			
	15	34	70	132	206	243	206	132	70	34	15			
0														
	m	-2	-1	0	1	2	3							