

Last information update: November 2024

Product configuration: 3360+L078

3360: Recessed fitting complete with inductive control gear with inverter 2x26 W TC-DEL (HIGH EFFICIENCY FIXTURE)

**Product code**3360: Recessed fitting complete with inductive control gear with inverter 2x26 W TC-DEL (HIGH EFFICIENCY FIXTURE) **Attention!**
Code no longer in production**Technical description**

Recessed fitting designed to use compact fluorescent lamps. The optical assembly is made of self-extinguishing thermoplastic material. The painted steel top plate acts as a heat dissipater, consequently optimising performance levels and ensuring outputs of up to 80%. The optical assembly is designed for installation in public environments and features surfaces made with inflammable materials. The fitting is installed by means of special fastening springs, which guarantee excellent anchoring to false ceilings ranging from 1 to 25 mm in thickness. The component-holding box is already wired and fitted with a luminous element.

Installation

Recessed with 212-mm diameter holes.

Colour

White / Aluminium (39)

Mounting

ceiling recessed

Wiring

Inductive control gear with inverter.

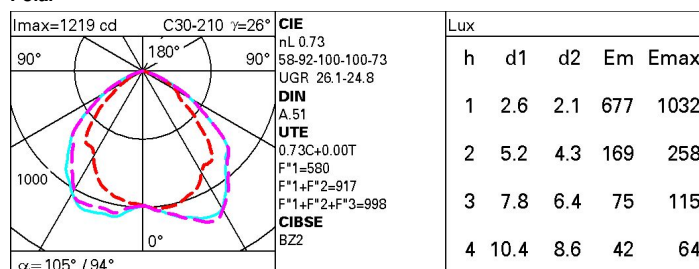
Notes

With high-efficiency reflector

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	2642.8	CRI:	85
W system:	60	Colour temperature [K]:	4000
Im source:	1800	Voltage [Vin]:	230
W source:	26	Lamp code:	L078
Luminous efficiency (lm/W, real value):	44	Socket:	G24q-3
Im in emergency mode:	213.1	Number of lamps for optical assembly:	2
Total light flux at or above an angle of 90° [Lm]:	0.3	ZVEI Code:	TC-DEL
Light Output Ratio (L.O.R.) [%]:	73	Number of optical assemblies:	1

Polar

	R	77	75	73	71	55	53	33	00	DRR
K0.8	52	45	40	36	44	40	39	35	47	
1.0	57	51	46	43	50	45	45	41	55	
1.5	64	59	56	53	58	55	54	50	68	
2.0	68	65	62	59	63	61	60	56	77	
2.5	71	68	65	63	66	64	63	60	81	
3.0	72	70	68	66	68	66	65	62	85	
4.0	74	72	70	69	71	69	68	65	89	
5.0	75	73	72	71	72	71	69	67	91	

[illegible]

Corrected UGR values (at 3600 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	25.6	26.6	25.9	26.9	27.1	24.0	25.0	24.3	25.2	25.5
	3H	26.1	26.9	26.4	27.2	27.5	24.4	25.3	24.8	25.6	25.9
	4H	26.0	26.8	26.4	27.1	27.4	24.5	25.3	24.8	25.6	25.9
	6H	26.0	26.7	26.3	27.0	27.3	24.4	25.2	24.8	25.5	25.8
	8H	25.9	26.6	26.3	27.0	27.3	24.4	25.1	24.8	25.4	25.8
	12H	25.9	26.5	26.3	26.9	27.3	24.4	25.0	24.8	25.4	25.7
4H	2H	25.8	26.6	26.2	26.9	27.2	24.4	25.1	24.7	25.5	25.8
	3H	26.3	27.0	26.7	27.3	27.7	24.8	25.5	25.2	25.8	26.2
	4H	26.3	26.8	26.7	27.2	27.6	24.9	25.4	25.3	25.8	26.2
	6H	26.2	26.7	26.6	27.1	27.5	24.8	25.3	25.3	25.7	26.2
	8H	26.1	26.6	26.6	27.0	27.5	24.8	25.2	25.2	25.7	26.1
	12H	26.1	26.5	26.6	26.9	27.4	24.7	25.2	25.2	25.6	26.0
8H	4H	26.2	26.6	26.6	27.0	27.5	24.7	25.2	25.2	25.6	26.1
	6H	26.1	26.5	26.5	26.9	27.4	24.7	25.1	25.2	25.5	26.0
	8H	26.0	26.4	26.5	26.8	27.3	24.7	25.0	25.1	25.4	25.9
	12H	26.0	26.3	26.5	26.7	27.3	24.6	24.9	25.1	25.4	25.9
12H	4H	26.1	26.5	26.6	27.0	27.4	24.7	25.1	25.2	25.5	26.0
	6H	26.0	26.4	26.5	26.8	27.3	24.6	25.0	25.1	25.4	25.9
	8H	26.0	26.3	26.5	26.7	27.3	24.6	24.9	25.1	25.4	25.9

Variations with the observer position at spacing:

S =	1.0H	0.4 / -0.5	0.7 / -0.9
	1.5H	1.2 / -1.7	1.2 / -2.1
	2.0H	2.4 / -3.8	2.1 / -4.3