


Last information update: March 2025

**Product configuration: Q720**

Q720: Spotlight with base - Neutral White Led - Class III - Very Wide Flood optic

**Product code**

Q720: Spotlight with base - Neutral White Led - Class III - Very Wide Flood optic

**Technical description**

Spotlight designed to use LED lamps and a Very Wide Flood optic. The optical assembly and base is made of EN1706AC 46100LF aluminium alloy and subjected to a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The following painting stage consists of a primer and a liquid acrylic paint, cured at 150°C, with a high level of weather and UV ray resistance. 5 mm thick tempered sodium-calcium closing glass. Double adjustability allows a 360° rotation about the vertical axis and 90° tilting relative to the horizontal plane. Mechanical aiming locks for rotation on both the vertical axis and horizontal plane. Complete with a monochrome LED circuit and an Opti Beam Reflector optic system. The product includes a PG13.5 cable gland. Black rubber outlet cable complete with anti-transpiration device. Black rubber outlet cable complete with anti-transpiration device. Electronic ballast to be ordered separately. Option of using optic accessories assembled via an accessory holder frame. All external screws used are made of A2 stainless steel.

**Installation**

Floor, wall, ceiling or ground-installed via a stake.

**Colour**

White (01) | Black (04) | Grey (15) | Rust Brown (F5)

**Weight (Kg)**

1.3

**Mounting**

wall surface/ground spike

**Wiring**

The product is supplied with a black rubber outlet cable complete with anti-transpiration device L=1000mm.

Complies with EN60598-1 and pertinent regulations


**Technical data**

Im system:	1982	Colour temperature [K]:	4000
W system:	16	MacAdam Step:	2
Im source:	2360	Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)
W source:	16	Lamp code:	LED
Luminous efficiency (Im/W, real value):	123.9	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	84	Intervallo temperatura ambiente:	from -30°C to 35°C.
Beam angle [°]:	78°	Lifetime of product at ambient operating temperature:	≥ 50.000h Ta=25°C
CRI (minimum):	80	LED current [mA]:	470

**Polar**

Imax=1471 cd		Lux			
90°	180°	h	d	Em	Emax
		4	6.4	66	92
		8	12.9	16	23
		12	19.3	7	10
		16	25.8	4	6
$\alpha = 78^\circ$					

### Isolux

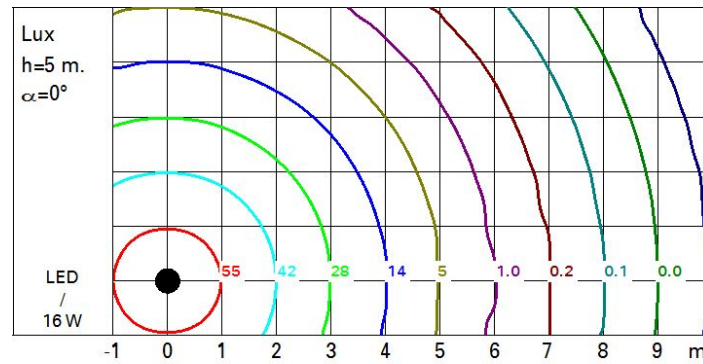

### UGR diagram

Corrected UGR values (at 2300 lm bare lamp luminous flux)												
Riflect.:		viewed crosswise					viewed endwise					
ceill/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim												
x	y											
2H	2H	26.4	27.2	26.7	27.4	27.7	26.4	27.2	26.7	27.4	27.7	27.7
	3H	26.3	27.0	26.6	27.2	27.5	26.3	27.0	26.6	27.2	27.5	27.5
	4H	26.2	26.8	26.6	27.1	27.4	26.2	26.8	26.6	27.1	27.4	27.4
	6H	26.1	26.7	26.5	27.0	27.4	26.2	26.7	26.5	27.0	27.4	27.4
	8H	26.1	26.6	26.5	27.0	27.3	26.1	26.7	26.5	27.0	27.3	27.3
	12H	26.1	26.6	26.5	26.9	27.3	26.1	26.6	26.5	26.9	27.3	27.3
4H	2H	26.2	26.8	26.6	27.1	27.4	26.2	26.8	26.6	27.1	27.4	27.4
	3H	26.1	26.6	26.5	26.9	27.3	26.1	26.6	26.5	26.9	27.3	27.3
	4H	26.0	26.4	26.4	26.8	27.2	26.0	26.4	26.4	26.8	27.2	27.2
	6H	25.9	26.3	26.3	26.7	27.1	25.9	26.3	26.3	26.7	27.1	27.1
	8H	25.9	26.2	26.3	26.6	27.1	25.9	26.2	26.3	26.6	27.1	27.1
	12H	25.8	26.1	26.3	26.6	27.0	25.8	26.1	26.3	26.6	27.0	27.0
8H	4H	25.9	26.2	26.3	26.6	27.1	25.9	26.2	26.3	26.6	27.1	27.1
	6H	25.8	26.1	26.2	26.5	27.0	25.8	26.1	26.2	26.5	27.0	27.0
	8H	25.7	26.0	26.2	26.4	26.9	25.7	26.0	26.2	26.4	26.9	26.9
	12H	25.7	25.9	26.2	26.4	26.9	25.7	25.9	26.2	26.4	26.9	26.9
12H	4H	25.8	26.1	26.3	26.6	27.0	25.8	26.1	26.3	26.6	27.0	27.0
	6H	25.7	26.0	26.2	26.4	26.9	25.7	26.0	26.2	26.4	26.9	26.9
	8H	25.7	25.9	26.2	26.4	26.9	25.7	25.9	26.2	26.4	26.9	26.9
Variations with the observer position at spacing:												
S =		1.0H	3.2 / -16.6				3.2 / -16.6					
		1.5H	5.5 / -23.3				5.5 / -23.3					
		2.0H	7.5 / -25.3				7.5 / -25.3					