

Last information update: April 2025

Product configuration: 245A

245A: SIPARIO Ø73 spotlight - DALI - WideFlood - OBReflector -

**Product code**

245A: SIPARIO Ø73 spotlight - DALI - WideFlood - OBReflector -

Technical description

Ø73 adjustable spotlight with adapter for installation on a base or electrified track. LED lamp with C.O.B. (Chip on board) technology, -CRI90- high colour rendering and 3000K tone.

Die-cast aluminium body with thermoplastic rear cap and front ring (Mass-Balance). The product can be rotated by 360° around the vertical axis with a mechanical lock and tilted by 90° relative to the horizontal plane. Passive heat dissipation.

OptiBeam Reflector optical system with WideFlood optic. Anti-scratch reflector made of P.V.D. (Physical Vapour Deposition) aluminium that can provide optimum performance in terms of light efficiency.

Dimmable electronic DALI-2 power supply integrated in the body of the luminaire.

Spotlight with Push&Go system designed to facilitate and safely accelerate the connection between product and optic accessory.

Mechanically disconnecting the accessory allows it to be disengaged but not dropped. Three internal accessories and one external one can be used simultaneously. All internal accessories rotate 360° about the spotlight longitudinal axis.

Installation

Base or mains voltage track.

Colour

White (01) | Matte black (V0)

Weight (Kg)

0.64

Mounting

three circuit track

Complies with EN60598-1 and pertinent regulations

**Technical data**

| | | | |
|--|------|---------------------------------------|---------------------------------|
| Im system: | 2003 | CRI (minimum): | 90 |
| W system: | 20.6 | Colour temperature [K]: | 3000 |
| Im source: | 2250 | MacAdam Step: | 2 |
| W source: | 18 | Life Time LED 1: | > 50,000h - L90 - B10 (Ta 25°C) |
| Luminous efficiency (Im/W, real value): | 97.2 | Lamp code: | LED |
| Im in emergency mode: | - | Number of lamps for optical assembly: | 1 |
| Total light flux at or above an angle of 90° [Lm]: | 0 | ZVEI Code: | LED |
| Light Output Ratio (L.O.R.) [%]: | 89 | Number of optical assemblies: | 1 |
| Beam angle [°]: | 54° | Control: | DALI-2 |


Polar

| | | | | | | | | |
|-------------------------|---|-----|-----|------|------------|---|----|------|
| $\alpha = 54^\circ$ | CIE nL 0.89 97-100-100-100-89 UGR 20.3-20.3 DIN A.61 UTE 0.89A+0.00T F*1=970 F*1+F*2=999 F*1+F*2+F*3=1000 CIBSE LG3 L<3000 cd/m² at 65° | | | | Lux | | | |
| | h | d | Em | Emax | h | d | Em | Emax |
| | 2 | 2 | 536 | 655 | | | | |
| | 4 | 4.1 | 134 | 164 | | | | |
| | 6 | 6.1 | 60 | 73 | | | | |
| | 8 | 8.2 | 34 | 41 | | | | |

Utilisation factors

| R | 77 | 75 | 73 | 71 | 55 | 53 | 33 | 00 | DRR |
|------|----|----|----|----|----|----|----|----|-----|
| K0.8 | 79 | 75 | 72 | 69 | 74 | 71 | 71 | 68 | 76 |
| 1.0 | 83 | 79 | 76 | 74 | 78 | 76 | 75 | 72 | 81 |
| 1.5 | 87 | 84 | 82 | 80 | 83 | 81 | 81 | 78 | 87 |
| 2.0 | 90 | 88 | 86 | 85 | 87 | 85 | 84 | 82 | 92 |
| 2.5 | 92 | 90 | 89 | 88 | 89 | 88 | 87 | 84 | 95 |
| 3.0 | 93 | 92 | 91 | 90 | 91 | 90 | 89 | 86 | 97 |
| 4.0 | 94 | 93 | 93 | 92 | 92 | 91 | 90 | 88 | 99 |
| 5.0 | 95 | 94 | 94 | 93 | 93 | 92 | 91 | 89 | 100 |

Luminance curve limit

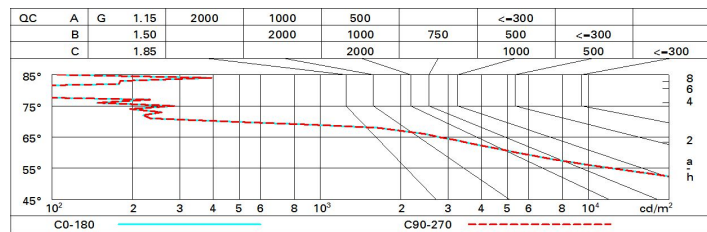

UGR diagram

| Corrected UGR values (at 2250 lm bare lamp luminous flux) | | | | | | | | | | | |
|--|-----|---------------------|------|------|------|------|-------------------|------|------|------|------|
| Reflect.: ceiling/cav walls work pl. Room dim x y | | viewed crosswise | | | | | viewed endwise | | | | |
| 2H | 2H | 20.9 | 21.5 | 21.1 | 21.7 | 21.9 | 20.9 | 21.5 | 21.1 | 21.7 | 21.9 |
| | 3H | 20.7 | 21.3 | 21.0 | 21.5 | 21.8 | 20.7 | 21.3 | 21.1 | 21.5 | 21.8 |
| | 4H | 20.7 | 21.2 | 21.0 | 21.5 | 21.7 | 20.7 | 21.2 | 21.0 | 21.5 | 21.8 |
| | 6H | 20.6 | 21.0 | 20.9 | 21.4 | 21.7 | 20.6 | 21.0 | 20.9 | 21.4 | 21.7 |
| | 8H | 20.5 | 21.0 | 20.9 | 21.3 | 21.7 | 20.6 | 21.0 | 20.9 | 21.3 | 21.7 |
| | 12H | 20.5 | 20.9 | 20.9 | 21.3 | 21.6 | 20.5 | 20.9 | 20.9 | 21.3 | 21.6 |
| 4H | 2H | 20.7 | 21.2 | 21.0 | 21.5 | 21.8 | 20.7 | 21.2 | 21.0 | 21.5 | 21.7 |
| | 3H | 20.5 | 20.9 | 20.9 | 21.3 | 21.6 | 20.5 | 20.9 | 20.9 | 21.3 | 21.6 |
| | 4H | 20.4 | 20.8 | 20.8 | 21.2 | 21.5 | 20.4 | 20.8 | 20.8 | 21.2 | 21.5 |
| | 6H | 20.3 | 20.7 | 20.8 | 21.1 | 21.5 | 20.3 | 20.7 | 20.8 | 21.1 | 21.5 |
| | 8H | 20.3 | 20.6 | 20.7 | 21.0 | 21.4 | 20.3 | 20.6 | 20.7 | 21.0 | 21.4 |
| | 12H | 20.2 | 20.5 | 20.7 | 20.9 | 21.4 | 20.2 | 20.5 | 20.7 | 20.9 | 21.4 |
| 8H | 4H | 20.3 | 20.6 | 20.7 | 21.0 | 21.4 | 20.3 | 20.6 | 20.7 | 21.0 | 21.4 |
| | 6H | 20.2 | 20.4 | 20.7 | 20.9 | 21.4 | 20.2 | 20.4 | 20.7 | 20.9 | 21.4 |
| | 8H | 20.1 | 20.4 | 20.6 | 20.8 | 21.3 | 20.1 | 20.4 | 20.6 | 20.8 | 21.3 |
| | 12H | 20.1 | 20.3 | 20.6 | 20.8 | 21.3 | 20.1 | 20.3 | 20.6 | 20.8 | 21.3 |
| 12H | 4H | 20.2 | 20.5 | 20.7 | 20.9 | 21.4 | 20.2 | 20.5 | 20.7 | 20.9 | 21.4 |
| | 6H | 20.1 | 20.4 | 20.6 | 20.8 | 21.3 | 20.1 | 20.4 | 20.6 | 20.8 | 21.3 |
| | 8H | 20.1 | 20.3 | 20.6 | 20.8 | 21.3 | 20.1 | 20.3 | 20.6 | 20.8 | 21.3 |
| Variations with the observer position at spacing: | | | | | | | | | | | |
| S = | | 1.0H | | | | | 4.9 / -12.4 | | | | |
| | | 1.5H | | | | | 7.7 / -18.4 | | | | |
| | | 2.0H | | | | | 9.7 / -23.7 | | | | |