



Last information update: April 2024

Product configuration: P321

P321: Fixed round recessed luminaire - LED - medium - Super Comfort

**Product code**

P321: Fixed round recessed luminaire - LED - medium - Super Comfort

Technical description

Round recessed luminaire with contact frame. Fixed Super Comfort version: the LEDs are set a long way back to minimize glare and guarantee a high level of visual comfort. The main body is made of die-cast aluminium with a radiant surface that guarantees optimum heat dissipation. Metallised, thermoplastic, high definition reflector - medium optic. Structure with die-cast aluminium external contact frame with a single white finish. The internal ring is made of thermoplastic available in a range of painted and metallised finishes. Safety glass included Quick and easy tool free assembly. High color rendering index 2700K LED. Power unit available with a separate code no.

Installation

Recessed in a false ceiling by means of an anti-fall steel wire spring - minimum thickness of false ceiling: 1 mm - preparation hole Ø 59 mm.

Colour

White (01) | Black / Black (43) | Black / White (47) | White/Gold (41)* | White / Chrome (E4)* | White / burnished chrome (E7)* | White / gold satin-finish (E9)*

Weight (Kg)

0.13

* Colours on request

Mounting

wall recessed/ceiling recessed

Wiring

Direct current ballasts are available with a separate code no.: ON-OFF / 1-10V dimmable / DALI dimmable / Trailing Edge dimmable - the recessed fitting includes a cable and a quick-coupling connector to connect it to the connector on the ballast.

Notes

A wide range of decorative accessories and diffusers is available.

Complies with EN60598-1 and pertinent regulations



IP20

IP44

On the visible part of the product once installed

**Technical data**

Im system:	648	CRI (minimum):	90
W system:	6.8	Colour temperature [K]:	3000
Im source:	800	MacAdam Step:	2
W source:	6.8	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	95.3	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	81	Number of optical assemblies:	1
Beam angle [°]:	22°	LED current [mA]:	200


Polar

	CIE nL 0.81 100-100-100-100-81 UGR <10-10 DIN A.61 UTE 0.81A+0.00T F*1=1000 F*1+F*2=1000 F*1+F*2+F*3=1000 CIBSE LG3 L<1500 cd/m² at 65° UGR<10 L<1500 cd/mq @65°			
	h	d	Em	Emax
	2	0.8	718	857
	4	1.6	180	214
	6	2.3	80	95
	8	3.1	45	54

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	73	70	67	65	69	66	66	64	78
1.0	76	73	71	69	72	70	70	67	83
1.5	80	78	76	74	77	75	74	72	89
2.0	83	81	79	78	80	78	78	75	93
2.5	84	83	82	81	82	81	80	78	96
3.0	85	84	83	83	83	82	81	79	98
4.0	86	85	85	84	84	84	82	81	99
5.0	87	86	86	86	85	84	83	81	100

Luminance curve limit

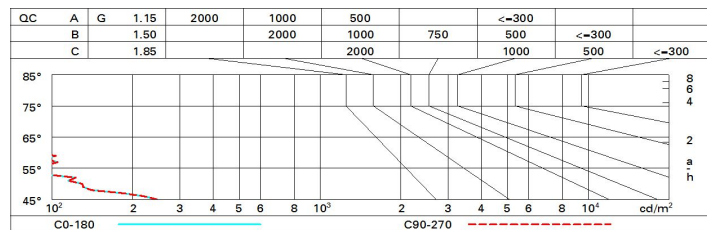

UGR diagram

Corrected UGR values (at 800 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling	cav	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	-10.2	-8.1	-9.9	-7.8	-7.4	-10.2	-8.1	-9.9	-7.8	-7.4
	3H	-10.4	-8.8	-10.0	-8.4	-8.1	-10.4	-8.7	-10.0	-8.4	-8.1
	4H	-10.4	-9.1	-10.1	-8.8	-8.4	-10.4	-9.1	-10.1	-8.8	-8.4
	6H	-10.5	-9.5	-10.1	-9.2	-8.8	-10.5	-9.5	-10.1	-9.2	-8.8
	8H	-10.5	-9.5	-10.1	-9.2	-8.8	-10.5	-9.5	-10.1	-9.2	-8.8
	12H	-10.6	-9.6	-10.2	-9.2	-8.9	-10.6	-9.6	-10.2	-9.2	-8.8
4H	2H	-10.4	-9.1	-10.1	-8.8	-8.4	-10.4	-9.1	-10.1	-8.8	-8.4
	3H	-10.6	-9.6	-10.2	-9.2	-8.8	-10.6	-9.6	-10.2	-9.2	-8.8
	4H	-10.7	-9.7	-10.3	-9.3	-8.9	-10.7	-9.7	-10.3	-9.3	-8.9
	6H	-11.1	-9.3	-10.6	-8.9	-8.4	-11.1	-9.3	-10.6	-8.9	-8.4
	8H	-11.2	-9.3	-10.7	-8.8	-8.3	-11.2	-9.3	-10.7	-8.8	-8.3
	12H	-11.3	-9.3	-10.8	-8.8	-8.3	-11.3	-9.3	-10.8	-8.8	-8.3
8H	4H	-11.2	-9.3	-10.7	-8.8	-8.3	-11.2	-9.3	-10.7	-8.8	-8.3
	6H	-11.3	-9.5	-10.8	-9.0	-8.5	-11.3	-9.5	-10.8	-9.0	-8.5
	8H	-11.3	-9.7	-10.8	-9.2	-8.7	-11.3	-9.7	-10.8	-9.2	-8.7
	12H	-11.2	-10.2	-10.7	-9.7	-9.1	-11.2	-10.2	-10.7	-9.7	-9.1
12H	4H	-11.3	-9.3	-10.8	-8.8	-8.3	-11.3	-9.3	-10.8	-8.8	-8.3
	6H	-11.3	-9.7	-10.8	-9.2	-8.7	-11.3	-9.7	-10.8	-9.2	-8.7
	8H	-11.2	-10.2	-10.7	-9.7	-9.1	-11.2	-10.2	-10.7	-9.7	-9.1
Variations with the observer position at spacing:											
S =		1.0H					5.8 / -10.9				
		1.5H					8.6 / -24.0				
		2.0H					10.6 / -25.0				