

Last information update: April 2025

Product configuration: P519

P519: Fixed circular recessed luminaire - Ø 212 mm - neutral white - white optic



Product code

P519: Fixed circular recessed luminaire - Ø 212 mm - neutral white - white optic **Attention! Code no longer in production**

Technical description

Fixed round luminaire designed to use a LED lamp with C.O.B. technology. Version with rim for surface-mounting. Reflector painted white with a layer of anti-scratch protection. Die-cast aluminium body and passive dissipation system. Product complete with LED lamp in neutral white colour tone (4,000K). General lighting beam.

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thicknesses ranging from 1 mm to 25 mm.

Colour

White (01)

Weight (Kg)

2.03



Mounting

ceiling recessed

Wiring

product complete with an electronic ballast

Complies with EN60598-1 and pertinent regulations

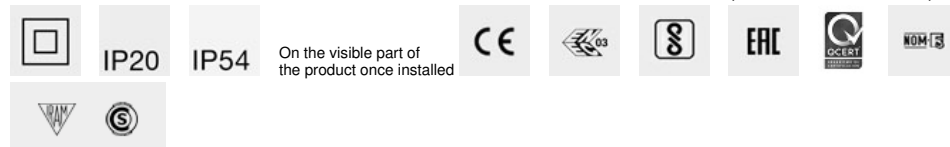

Technical data

lm system:	4249.88	CRI:	80
W system:	35.4	Colour temperature [K]:	4000
lm source:	5250	MacAdam Step:	2
W source:	31	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25C)
Luminous efficiency (lm/W, real value):	120.05	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0.0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	81	Number of optical assemblies:	1
Beam angle [°]:	62°		