

Last information update: January 2025

Product configuration: QV67

QV67: Robin spotlight Ø62 for installation on a 48V low voltage track - DALI



Product code

QV67: Robin spotlight Ø62 for installation on a 48V low voltage track - DALI

Technical description

Miniaturised adjustable spotlight with adapter for installation on 48V low voltage track. Made of die-cast aluminium with passive dissipation system. The adapter made of a thermoplastic material includes the DC/DC driver circuit with a DALI power line dimmable function. Integrated «power line» technology allows each spotlight on the track to be adjusted separately. The swivel joints allow the spotlight to be rotated by 360° and tilted by 160° with the option of installing the spotlight on a 48V track in both an "up" and "down" position. The set back position of the optic unit guarantees a high level of visual comfort. A high definition thermoplastic lens with the option of using additional accessories to create other light effects. A rapid tool-free system for connecting the adapter electrically and mechanically to the track. The 48V track coupling device is fitted with a mechanical anti-fall safety double block.

Installation

An adapter is used to fix the device mechanically and tool-free to the 48V track.

Colour

White (01) | Black (04)


Weight (Kg)

0.75

Wiring

Driver DC/DC with a DALI power line dimmable function - direct connection on 48V track. Track power supply unit to be ordered separately.


Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	2241	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W system:	25.9	Voltage [Vin]:	48
Im source:	2700	Lamp code:	LED
W source:	24	Number of lamps for optical assembly:	1
Luminous efficiency (Im/W, real value):	86.5	ZVEI Code:	LED
Im in emergency mode:	-	Number of optical assemblies:	1
Total light flux at or above an angle of 90° [Lm]:	0	Power factor:	See installation instructions
Light Output Ratio (L.O.R.) [%]:	83	Minimum dimming %:	5
Beam angle [°]:	42°	Overvoltage protection:	2kV Common mode & 1kV Differential mode
CRI (minimum):	90	Dimming mode:	CCR
Colour temperature [K]:	3000	Control:	DALI
MacAdam Step:	2		


Polar

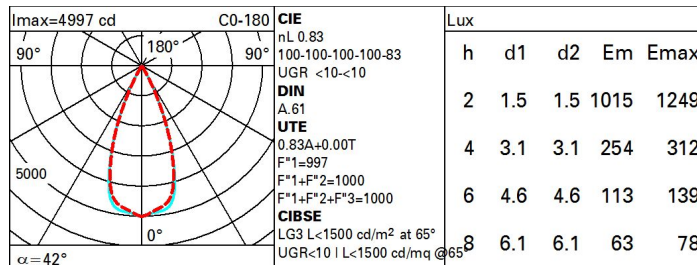

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	71	68	66	70	68	68	65	78
1.0	78	75	72	70	74	72	71	69	83
1.5	82	79	77	76	79	77	76	74	89
2.0	85	83	81	80	82	80	79	77	93
2.5	86	85	84	83	84	83	82	79	96
3.0	87	86	85	85	85	84	83	81	98
4.0	88	87	87	86	86	86	84	82	99
5.0	89	88	88	88	87	86	85	83	100

Luminance curve limit

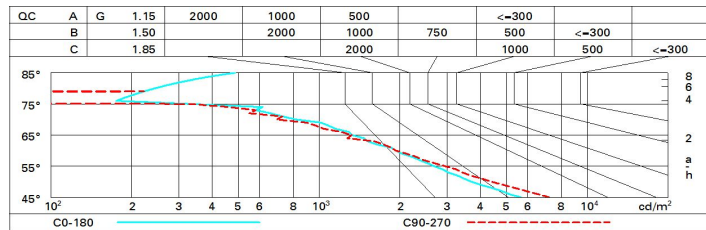

UGR diagram

Corrected UGR values (at 2700 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling	cav	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	0.7	7.3	7.0	7.5	7.7	7.0	7.0	7.3	7.8	8.1
	3H	0.6	7.1	6.9	7.4	7.6	6.9	7.4	7.2	7.7	8.0
	4H	0.5	7.0	6.9	7.3	7.6	6.9	7.3	7.2	7.6	7.9
	6H	0.5	6.9	6.8	7.2	7.5	6.8	7.2	7.1	7.5	7.9
	8H	0.4	6.8	6.8	7.2	7.5	6.8	7.2	7.1	7.5	7.8
	12H	0.4	6.8	6.8	7.1	7.5	6.7	7.1	7.1	7.5	7.8
4H	2H	0.5	7.0	6.9	7.3	7.6	6.9	7.3	7.2	7.6	7.9
	3H	0.4	6.8	6.8	7.2	7.5	6.7	7.1	7.1	7.5	7.8
	4H	0.3	6.7	6.7	7.1	7.4	6.7	7.0	7.1	7.4	7.8
	6H	0.2	6.6	6.7	7.0	7.4	6.6	6.9	7.0	7.3	7.7
	8H	0.2	6.5	6.6	6.9	7.3	6.5	6.8	7.0	7.2	7.7
	12H	0.2	6.4	6.6	6.8	7.3	6.5	6.7	6.9	7.2	7.6
8H	4H	0.2	6.5	6.6	6.9	7.3	6.5	6.8	7.0	7.2	7.7
	6H	0.1	6.3	6.6	6.8	7.3	6.4	6.7	6.9	7.1	7.6
	8H	0.1	6.3	6.5	6.7	7.2	6.4	6.6	6.9	7.0	7.5
	12H	0.0	6.2	6.5	6.7	7.2	6.3	6.5	6.8	7.0	7.5
12H	4H	0.2	6.4	6.6	6.8	7.3	6.5	6.7	6.9	7.2	7.6
	6H	0.1	6.3	6.5	6.7	7.2	6.4	6.6	6.9	7.0	7.5
	8H	0.0	6.2	6.5	6.7	7.2	6.3	6.5	6.8	7.0	7.5
Variations with the observer position at spacing:											
S =	1.0H	6.3 / -8.7					6.2 / -8.8				
	1.5H	9.1 / -10.8					9.0 / -11.3				
	2.0H	11.1 / -12.5					11.0 / -13.4				