

Linealuce

Design Jean-Michel
Wilmotte



iGuzzini

Last information update: May 2024

Product configuration: BN18+BZV1.00

BN18: Linear Recessed - Neutral White LED - Electronic control gear 220-240V ac - DALI - L=1129 mm - R13 anti-slip glass - Flood Optic

BZV1.00: Casing - L=1110 - Indeterminate



Product code

BN18: Linear Recessed - Neutral White LED - Electronic control gear 220-240V ac - DALI - L=1129 mm - R13 anti-slip glass - Flood Optic **Attention! Code no longer in production**

Technical description

Direct light luminaire, designed to use monochrome LED lamps, DALI dimmable. Ground-, wall- and ceiling-recessed. Consists of a body and outer casing for installation, to be ordered separately. Extruded aluminium body, with die-cast aluminium end caps complete with silicone seals. Coated with liquid acrylic paint with a high level of weather and UV ray resistance. Lower PPS (polyphenylene sulfide) power box. The top of the optical assembly is closed by an 8 mm thick anti-slip glass screen (conforming to class R13 in accordance with DIN 51130), fixed with silicone. Complete with multi-LED power plate in Neutral White. Fitted with optics with plastic (methacrylate) lens for Flood lighting. The lower box has two PG11 nickel-plated brass cable glands and outgoing cables for pass-through wiring. To fix the optical assembly to the outer casing the product has a quick coupling system using an Allen key. Outer casing for installation made of aluminium with technopolymer covers, to be ordered separately. All external screws used are made of A2 stainless steel. The luminaire technical characteristics conform to EN 60598-1 standards and particular requirements.

Installation

Ground- and wall-recessed using the outer casing, to be ordered separately. For ground installation a drainage channel must be created or gravel inserted for drainage under the outer casing before installation, to guarantee the degree of protection stated. For ceiling-mounting with plasterboard panels (1-30 mm thick), make the preparation openings as indicated in the instructions sheet and use the accessory with code 5926 (kit containing steel cables with reinforcement plates).

Colour

Grey (15)

Weight (Kg)

3.8

Mounting

wall recessed|ceiling recessed|ground recessed

Wiring

Equipped with DALI dimmable electronic control gear, 220-240V ac, 50/60Hz contained in the luminaire. For electrical connection the product has a lower box with a nickel-plated brass PG11 double cable gland with H07RN-F rubber outgoing cables for pass-through wiring: each cable is set up both for the Dali signal and for 220-240V ac power supply. Available for electrical connection: IP68 5-pin linear connector (BZS6), cap for IP68 connectors (BZQ7), IP68 5-pin 3-way (Y-type) linear connector (BZN7).

Notes

Product complete with LED lamp. The frame, glass, optical assembly and outer casing together guarantee a maximum static load resistance of 1000 kg. The product occupies 1 Dali load and 1 Dali address. Fitted with DIRECT DIM, used for adjustments with a standard button, with the following functions: Soft ON/OFF, dimming, recall last lighting level.

Complies with EN60598-1 and pertinent regulations



Accessory code

BZV1.00: Casing - L=1110 - Indeterminate

Technical description

Aluminium outer casing L=1110 mm complete with technopolymer side and upper caps and membrane cable glands. The side caps are supplied with openable circular walls to facilitate the insertion of corrugated tubes (passage of power cables). To be used on recessed Linealuce Compact modules L=1129 mm

Installation

For ground- or wall-recessed installation with cast cement/concrete or other suitable material. For ground installation a drainage channel must be created (positioned below the special holes) or gravel inserted for drainage under the outer casing before installation, to guarantee the degree of protection stated.


Colour

Indeterminate (00)

Weight (Kg)

1.95


Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	1776	MacAdam Step:	3
W system:	29.5	Life Time LED 1:	100,000h - L80 - B10 (Ta 25°C)
Im source:	3700	Life Time LED 2:	100,000h - L80 - B10 (Ta 40°C)
W source:	25	Voltage [Vin]:	230
Luminous efficiency (Im/W, real value):	60.2	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	48	Number of optical assemblies:	1
Beam angle [°]:	42°	Intervallo temperatura ambiente:	from -30°C to 50°C.
CRI (minimum):	80	Control:	DALI
Colour temperature [K]:	4000		

Polar

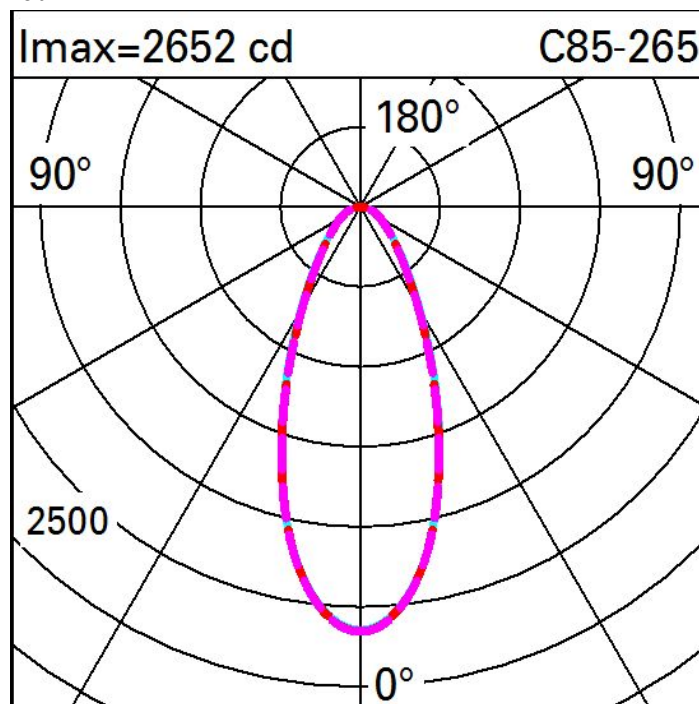

Illuminances

Lux										
Wall distance = 1m										
3										
	1	3	8	22	52	77	52	22	8	3
2	3	7	16	35	74	105	74	35	16	7
	5	9	18	38	73	100	73	38	18	9
1	5	9	17	35	66	87	66	35	17	9
	5	9	17	33	54	69	54	33	17	9
0										
m	-2	-1	0	1	2	3				