

Last information update: October 2024

**Product configuration: EG45**

EG45: 47 surface Remote – Neutral White – 48 Vdc DMX512-RDM – L=1205mm – Spot optic

**Product code**

EG45: 47 surface Remote – Neutral White – 48 Vdc DMX512-RDM – L=1205mm – Spot optic

**Technical description**

Direct light luminaire, designed to use monochrome LED lamps, DMX512-RDM 48Vdc dimmable with searching and addressing function. Ceiling-, wall- or surface-mounted. Consists of a body and supports for installation, to be ordered separately. The body is made of extruded aluminium and includes die-cast aluminium end caps with 50/60 Shore A silicone seals. It is subjected to a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The following painting stage consists of a primer and a liquid acrylic paint, cured at 150°C, with a high level of weather and UV ray resistance. The top of the optical assembly is closed by a 3 mm thick transparent glass screen, fixed with silicone. Complete with multi-LED plate in Neutral White and a 48V dc DMX512-RDM electronic driver (ballast to be ordered separately). Supplied with a double PG11 and outlet cables for pass-through wiring with IP68 male/female joiners. Fitted with optics with a plastic (methacrylate) lens for Spot lighting. All external screws used are made of A2 stainless steel. The luminaire technical characteristics conform to EN 60598-1 standards and particular requirements.

**Installation**

Accessories are available for installation, like adjustable AISI304 stainless steel wall-mounted arms.

**Colour**

White (01) | Black (04) | Grey (15) | Rust Brown (F5)

**Weight (Kg)**

3.3

**Mounting**

wall arm|wall surface|ceiling surface

**Wiring**

Complete with DMX-RDM 44÷52Vdc control card. The product is supplied with a nickel-plated brass PG11 double cable gland with 05RN-F 2x1,5mm<sup>2</sup>+3x0,35mm<sup>2</sup> rubber outlet cables for pass-through wiring with joiners (illegible part). Available for electrical connection and DMX-RDM control: IP68 5-pin female connector, IP68 5-pin male connector + closing cap (BZI6), and IP68 5-pin male + female connectors.

**Notes**

Product complete with LED lamp. DMX specifications require the insertion of a 120 Ohm terminating resistor to be placed between the DATA+ and DATA- cables of the last product in the line (BZQ7).

Complies with EN60598-1 and pertinent regulations




IK06

IP66

**Technical data**

Im system:	4424	MacAdam Step:	3
W system:	46.8	Life Time LED 1:	100,000h - L80 - B10 (Ta 25°C)
Im source:	5600	Life Time LED 2:	100,000h - L80 - B10 (Ta 40°C)
W source:	42	Voltage [Vin]:	48
Luminous efficiency (Im/W, real value):	94.5	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	79	Number of optical assemblies:	1
Beam angle [°]:	12°	Intervallo temperatura ambiente:	from -30°C to 50°C.
CRI (minimum):	80	LED current [mA]:	600
Colour temperature [K]:	4000	Control:	DMX-RDM

Polar

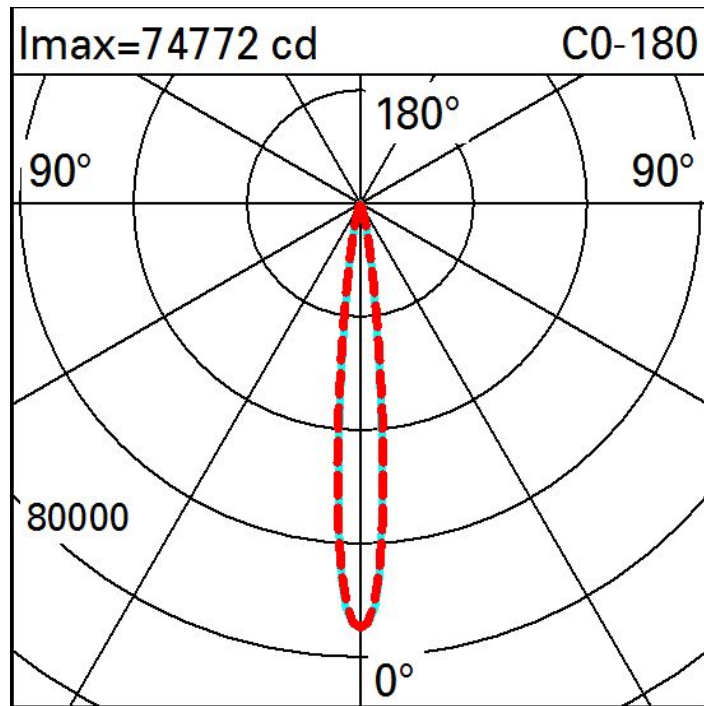

Illuminances

Lux													Wall distance = 1m	
3														
				0.1	0.3	0.9	1	0.9	0.3	0.1				
2	0.3	0.5	1	2	4	7	7	4	2	1	0.5	0.3		
	0.7	1	2	4	6	8	8	6	4	2	1	0.7		
1	0.7	1	2	5	8	15	15	8	5	2	1	0.7		
	0.8	1	2	4	11	22	22	11	4	2	1	0.8		
0														
	m	-2	-1			0			1	2	3			